

CONFIDENTIAL

Approved For Release 2003/10/15 : CIA-RDP70B00584R000200010001-1

~~BOEING AIRPLANE COMPANY~~

SEATTLE 24, WASHINGTON

NASA REVIEW COMPLETED

FOR OFFICIAL USAF/NASA USE ONLY

THIS DOCUMENT AND THE DATA CONTAINED HEREIN ARE
RESTRICTED FROM DISTRIBUTION OUTSIDE USAF/NASA
WITHOUT SPECIFIC APPROVAL OF THE DYNA-SOAR SYSTEM
PROGRAM OFFICE, ABZRA.

DOCUMENT NO. D2-80065

UNCLASSIFIED TITLE Aerodynamic Stability and Control

Data Model 844-2050.

MODEL NO. Dyna Soar CONTRACT NO. AF33(600)-41517

ISSUE NO. 92 ISSUED TO AFJNA

CLASSIFIED TITLE
(STATE CLASSIFICATION)

WORK ORDER NO.

UNIT NO.

ITEM NO.

SPECIAL LIMITATIONS ON ASTIA DISTRIBUTION

ASTIA may distribute this report to requesting agencies subject to their security agreement, approved fields of interest, and the following:

☐ UNLIMITED—To all agencies of the Department of Defense and their contractors.

☒ LIMITED—To U. S. Military organizations only.

This report may be distributed to nonmilitary agencies not approved above subject to SAC approval of each request.

NOTE: The LIMITED category may be checked only because of actual or potential patent, proprietary, ethical, or similar implications.

GROUP 4

DOWNGRADED AT 3 YEAR INTER-
VALS; DECLASSIFIED AFTER
12 YEARS.

DOD DIR 5200.10

PREPARED BY Flight Controls Group

SUPERVISED BY A. H. Lee + R. J. Montgomery

APPROVED BY L. J. Mason

CLASS. & DISTR. L. J. Mason

APPROVED BY D. S. Lesko

5/16/61
(DATE)

USAF and NASA
review(s) completed.

NO. OF PAGES 191 (EXCLUDING TITLE AND REVISION AND ADDITION PAGES.)
COMPLETE REVISION 358 PAGES

CONFIDENTIAL

ID 61RWRS-12069

12-20-61

BAC 324 B-RB

Approved For Release 2003/10/15 : CIA-RDP70B00584R000200010001-1

DOCUMENT DISTRIBUTION

Aeronautical Systems Division (ASZRKP)
Air Force Systems Command
Wright-Patterson Air Force Base, Ohio (7cys)

NASA, 1529 H. Street
Washington 25, D.C.

Attn: A. J. Evans (RAA)

NASA, Langley Research Center
Langley AFB, Virginia

Attn: P. Korycinski (2cys)

NASA, Ames Research Center
Moffett Field, California

Attn: Robert Crane

NASA, Flight Research Center
P.O. Box 273
Edwards AFB, California

Attn: Paul Bikle

AFFTC (FTGS)
Edwards AFB, California

SSD (SSVS)
AF Unit Post Office
Los Angeles 45, California (3cys)

ASD (PFTO)
Patrick AFB, Florida

AFTIA
Arlington Hall Station
Arlington, Virginia (10cys)

AFPR/RWRB

CHANGE RECORD								REV			
REV	REVISED	ADDED	DELETED	REV	REVISED	ADDED	DELETED	REV	REVISED	ADDED	DELETED
Active Pages at Original Release											
Section 1 1 - 1.2											
2 2.1											
3 3.1 - 3.8											
4 4.1 - 4.3											
5 5.1 - 5.67											
6 6.1 - 6.75											
7 7.1 - 7.22											
Complete Revision 12-20-61											
Active Pages											
1-23											
Section 1 1.1											
2 2.1											
3 3.1 through 3.10											
4 4.1 through 4.4											
5 5.1 through 5.36											
6 6.1 through 6.207											
7 7.1 through 7.37											
8 8.1 through 8.4											
9 9.1 through 9.3											
10 10.1 through 10.32											
12-20-61						BOEING AIRPLANE COMPANY					
Approved For Release 2003/10/15 : CIA-RDP70B00584R000200010001-1						D2-80045					
						P NO. 3					

REVISIONS

12-20-61 Revised to update the aerodynamic stability and control data due to changes in configuration.

Prepared by: Flight Technology Staff

Approved by:

R. C. Milnor
R. C. Milnor

A. L. Nagel
A. L. Nagel

L. J. Mason
L. J. Mason

12-20-61

U3-4071-1000 (was BAC 1546-L-R3)

BOEING

NO. D2-80065

ACKNOWLEDGEMENTS

Flight Control Group:

L. A. Bodin
A. M. Carter
T. H. Chase
H. O. Claar
W. S. Cox
B. M. Dempsey
J. L. Francis
E. J. Hamilton
G. D. Katz
P. M. McGinness
J. S. McKie
R. W. Meinke
J. H. Montgomery
K. A. Noess
D. E. Phillips
E. M. Piper
S. T. Sakata
D. E. Shafer
R. K. Rice
N. T. Underwood
P. T. Victor
A. E. Wood
C. L. Witzke

Performance Group:

R. C. Milnor
J. Dehlbom
B. F. Corcoran
W. E. Johnson
C. F. Pecoraro
W. C. Pietrowski

Aerothermodynamics Group:

A. L. Nagel
C. R. Ditzler
R. A. Hanks
C. R. Russell
A. C. Thomas
T. D. Beck
D. E. Bennett
B. W. Reynolds
L. A. Johnson

12-20-61

U3-4071-1000 (was BAC 1544-L-R3)

TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
	Document Distribution	2
	Change Record Page	3
	Revision Page	4
	Acknowledgements	5
1.0	Introduction	1.1
2.0	References	2.1
3.0	Configuration Description	3.1 - 3.10
4.0	Definition of Symbols	4.1 - 4.4
5.0	Constraints Due to Aerodynamic Heating and Loads	5.1 - 5.36
5.1	Introduction	5.1
5.2	Basic Limits	5.1
5.3	Control Surface Limits	5.2
6.0	Glider Static Stability and Control	6.1 -
6.1	Longitudinal Stability and Control	6.2
6.1.1	Landing Speed	6.8
6.1.2	Subsonic Transonic Speed	6.11
6.1.3	Supersonic Speed	6.18
6.1.4	Hypersonic Speed	6.23
6.1.5	Elevon as Aileron - Pitch Coupling	6.70
6.1.6	Rotary Derivatives	6.74
6.1.7	Elevon Hinge Moment Characteristics	6.77
6.2	Lateral Directional Stability and Control	6.99
6.2.1	Landing Speed - Gear and Gear Doors Extended	6.109
6.2.2	Subsonic - Transonic Speed	6.111

12-20-61

U3-4071-1000

BOEING | NO. DL-80065


TABLE OF CONTENTS (Cont'd)

<u>Section</u>	<u>Title</u>	<u>Page</u>
6.2.3	Subsonic Speed	6.131
6.2.4	Hypersonic Speed	6.147
6.2.5	Speed Brakes	6.183
6.2.6	Rotary Derivatives	6.187
6.2.7	Rudder Hinge Moment Characteristics	6.192
7.0	Abort Vehicle Stability and Control	7.1 - 7.37
7.1	Longitudinal Stability and Control	7.1
7.1.1	Subsonic - Supersonic Speeds	7.2
7.1.2	Hypersonic Speeds	7.3
7.1.3	Rotary Derivatives	7.3
7.1.4	Elevon Hinge Moment Characteristics	7.3
7.2	Lateral Directional Stability	7.22
7.2.1	Subsonic and Supersonic Speeds	7.22
7.2.2	Hypersonic Speeds	7.23
7.2.3	Rotary Derivatives	7.23
7.2.4	Rudder Hinge Moment Characteristics	7.23
8.0	Effects of Aero Elasticity	8.1 - 8.4
9.0	Glider in the Presence of Aircarrier	9.1 - 9.3
10.0	Glider and Abort Vehicle Aerodynamic Performance Data	10.1 - 10.32
10.1	Glider Aerodynamic Performance Data	10.1
10.1.1	Lift Curves	10.1
10.1.2	Drag Polars	10.2
10.1.3	Axial Force Coefficients	10.2

12-20-61

U3-4071-1000

BOEING

NO. D2-80065

TABLE OF CONTENTS (Cont'd)

<u>Section</u>	<u>Title</u>	<u>Page</u>
10.2	Abort Vehicle Performance Data	10.25
10.2.1	Abort Vehicle Lift Curves	10.25
10.2.2	Abort Vehicle Drag Polars	10.25
10.2.3	Abort Vehicle Axial Force Coefficients	10.25

12-20-61

U3-4071-1000

BOEING NO. D2-80065

FIGURE INDEX

<u>Figure</u>	<u>Title</u>	<u>Page</u>
3.1	General Arrangement, Dyna Soar Model 844-2050 Revision D	3.5
3.2	Glider Configuration 844-2050 D (1/4 Front View)	3.6
3.3	Glider + 3rd Stage Mass Data	3.7
3.4	Body Axis System Nomenclature - Combined Angle of Attack and Sideslip	3.8
3.5	Body Axis System Nomenclature	3.9
3.6	Aerodynamic Reference Constants	3.10
5.1	Air Vehicle - Altitude Limits - Boost	5.4
5.2	Basic Glider - Altitude Limits - Re-entry	5.5
5.3	Glider Plus Transition - Altitude Limits - Abort Condition	5.6
5.4	Elevon Deflection Altitude Limits; $-10^\circ \leq \alpha \leq 50^\circ$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 8000 fps	5.7
5.5	Elevon Deflection Altitude Limits; $-10^\circ \leq \alpha \leq 50^\circ$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 10,000 fps	5.8
5.6	Elevon Deflection Altitude Limits; $-10^\circ \leq \alpha \leq 50^\circ$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 12,000 fps	5.9
5.7	Elevon Deflection Altitude Limits; $-10^\circ \leq \alpha \leq 50^\circ$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 14,000 fps	5.10
5.8	Elevon Deflection Altitude Limits; $-10^\circ \leq \alpha \leq 50^\circ$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 16,000 fps	5.11
5.9	Elevon Deflection Altitude Limits; $-10^\circ \leq \alpha \leq 50^\circ$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 18,700 fps	5.12
5.10	Elevon Deflection Altitude Limits; $-10^\circ \leq \alpha \leq 50^\circ$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 20,700 fps	5.13
5.11	Elevon Deflection Altitude Limits; $-10^\circ \leq \alpha \leq 50^\circ$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 23,000 fps	5.14
5.12	Elevon Deflection Altitude Limits; $-10^\circ \leq \alpha \leq 50^\circ$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 27,000 fps	5.15

12-20-61

U3-4071-1000 (was BAC 1544-L-R3)

BOEING

NO. 02-80065

FIGURE INDEX (Cont'd)

<u>Figure</u>	<u>Title</u>	<u>Page</u>
5.13	Elevon Deflection Altitude Limits; $-40^\circ \leq \alpha \leq 0$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 10,000 fps	5.16
5.14	Elevon Deflection Altitude Limits; $-40^\circ \leq \alpha \leq 0$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 12,000 fps	5.17
5.15	Elevon Deflection Altitude Limits; $-40^\circ \leq \alpha \leq 0$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 14,000 fps	5.18
5.16	Elevon Deflection Altitude Limits; $-40^\circ \leq \alpha \leq 0$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 16,000 fps	5.19
5.17	Elevon Deflection Altitude Limits; $-40^\circ \leq \alpha \leq 0$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 18,700 fps	5.20
5.18	Elevon Deflection Altitude Limits; $-40^\circ \leq \alpha \leq 0$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 20,700 fps	5.21
5.19	Elevon Deflection Altitude Limits; $-40^\circ \leq \alpha \leq 0$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 23,000 fps	5.22
5.20	Elevon Deflection Altitude Limits; $-40^\circ \leq \alpha \leq 0$; $-55^\circ \leq \delta_e \leq 20^\circ$ V = 27,000 fps	5.23
5.21	Rudder Deflection Altitude Limits; $0^\circ \leq \delta_r \leq 35^\circ$; $\beta = 0^\circ$ V = 8,000; $0^\circ \leq \alpha \leq 50^\circ$	5.24
5.22	Rudder Deflection Altitude Limits; $0^\circ \leq \delta_r \leq 35^\circ$; $\beta = 0^\circ$ V = 10,000; $0^\circ \leq \alpha \leq 50^\circ$	5.25
5.23	Rudder Deflection Altitude Limits; $0^\circ \leq \delta_r \leq 35^\circ$; $\beta = 0^\circ$ V = 12,000; $0^\circ \leq \alpha \leq 50^\circ$	5.26
5.24	Rudder Deflection Altitude Limits; $0^\circ \leq \delta_r \leq 35^\circ$; $\beta = 0^\circ$ V = 14,000; $0^\circ \leq \alpha \leq 50^\circ$	5.27
5.25	Rudder Deflection Altitude Limits; $0^\circ \leq \delta_r \leq 35^\circ$; $\beta = 0^\circ$ V = 16,000; $0^\circ \leq \alpha \leq 55^\circ$	5.28
5.26	Rudder Deflection Altitude Limits; $0^\circ \leq \delta_r \leq 35^\circ$; $\beta = 0^\circ$ V = 18,700; $0^\circ \leq \alpha \leq 55^\circ$	5.29
5.27	Rudder Deflection Altitude Limits; $0^\circ \leq \delta_r \leq 35^\circ$; $\beta = 0^\circ$ V = 20,700; $0^\circ \leq \alpha \leq 55^\circ$	5.30
5.28	Rudder Deflection Altitude Limits; $0^\circ \leq \delta_r \leq 35^\circ$; $\beta = 0^\circ$ V = 23,000; $0^\circ \leq \alpha \leq 55^\circ$	5.31

12-20-61

U3-4071-1000 (was SAC 1546-L-R3)

BOEING

NO. D2-80065

FIGURE INDEX (Cont'd)

<u>Figure</u>	<u>Title</u>	<u>Page</u>
5.29	Rudder Deflection Altitude Limits; $0^\circ \leq S_r \leq 35^\circ$; $\beta = 0^\circ$ $V = 27,000$; $0^\circ \leq \alpha \leq 55^\circ$	5.32
5.30	Maximum Allowable Rudder Deflection; $0^\circ \leq \beta \leq 10^\circ$ $\alpha = 17.5^\circ$	5.33
5.31	Maximum Allowable Rudder Deflection; $0^\circ \leq \beta \leq 10^\circ$ $\alpha = 30^\circ$	5.34
5.32	Maximum Allowable Rudder Deflection; $0^\circ \leq \beta \leq 10^\circ$ $\alpha = 40^\circ$	5.35
5.33	Maximum Allowable Rudder Deflection; $0^\circ \leq \beta \leq 10^\circ$ $\alpha = 55^\circ$	5.36
6.1	Longitudinal Aerodynamic Center	6.3
6.2	Trimmed Normal Force Slope	6.4
6.3	Angle of Attack and Pitching Moment at Zero Normal Force	6.5
6.4	Elevator Required to Trim	6.6
6.5	Elevon Effectiveness	6.7
6.6	Longitudinal Stability $M = .26 \pm .50$ (Landing Gear Down in Presence of Ground Plane)	6.9
6.7	Trimmed Normal Force - Landing Speed	6.10
6.8	Longitudinal Stability $M = .26 \pm .50$	6.12
6.9	Longitudinal Stability $M = 0.80$	6.13
6.10	Longitudinal Stability $M = .95$	6.14
6.11	Longitudinal Stability $M = 1.00$	6.15
6.12	Longitudinal Stability $M = 1.10$	6.16
6.13	Trimmed Normal Force - Subsonic - Transonic	6.17
6.14	Longitudinal Stability $M = 1.40$	6.19
6.15	Longitudinal Stability $M = 2.0$	6.20
6.16	Longitudinal Stability $M = 3.5$	6.21

12-20-01

U3-4071-1000 (was BAC 1544-L-R3)

FIGURE INDEX (Cont'd)

<u>Figure</u>	<u>Title</u>	<u>Page</u>
6.17	Trimmed Normal Force - Supersonic	6.22
6.18	Longitudinal Stability Hot Shape M = 6.0	6.25
6.19	Longitudinal Stability Hot Shape M = 8.08	6.26
6.20	Longitudinal Stability Hot Shape M = 9.0 Low R_{Nc}	6.27
6.21	Longitudinal Stability Hot Shape M = 9.0	6.28
6.22	Longitudinal Stability Hot Shape M = 11.0	6.29
6.23	Longitudinal Stability Hot Shape M = 16.0	6.30
6.24	Longitudinal Stability Hot Shape M = 22.0	6.31
6.25	Longitudinal Stability Cold Shape M = 6.0	6.32
6.26	Longitudinal Stability Cold Shape M = 8.08	6.33
6.27	Longitudinal Stability Cold Shape M = 9.0	6.34
6.28	Longitudinal Stability Cold Shape 250,000 Ft. Alt.	6.35
6.29	Longitudinal Stability Cold Shape 300,000 Ft. Alt.	6.36
6.30	Longitudinal Stability Cold Shape 350,000 Ft. Alt.	6.37
6.31	Longitudinal Stability Cold Shape 400,000 Ft. Alt.	6.38
6.32	Longitudinal Stability Cold Shape 500,000 Ft. Alt.	6.39
6.33	Trimmed Longitudinal Aerodynamic Center M = 6.0	6.40
6.34	Trimmed Longitudinal Aerodynamic Center M = 8.08	6.41
6.35	Trimmed Longitudinal Aerodynamic Center M = 9.0 Low R_{Nc}	6.42

12-20-61

US-4071-1000 (was BAC 1244-L-R3)

BOEING

NO. D2-80065

FIGURE INDEX (Cont'd)

<u>Figure</u>	<u>Title</u>	<u>Page</u>
6.36	Trimmed Longitudinal Aerodynamic Center M = 9.0	6.43
6.37	Trimmed Longitudinal Aerodynamic Center M = 11.0	6.44
6.38	Trimmed Longitudinal Aerodynamic Center M = 16.0	6.45
6.39	Trimmed Longitudinal Aerodynamic Center M = 22.0	6.46
6.40	Elevon Required to Trim M = 6	6.47
6.41	Elevon Required to Trim M = 8.08	6.48
6.42	Elevon Required to Trim M = 9.0 Low $R_{N\bar{C}}$	6.49
6.43	Elevon Required to Trim M = 9.0	6.50
6.44	Elevon Required to Trim M = 11.0	6.51
6.45	Elevon Required to Trim M = 16.0	6.52
6.46	Elevon Required to Trim M = 22.0	6.53
6.47	Effect of Elevon on Normal Force M = 8.08	6.54
6.48	Effect of Elevon on Normal Force M = 22.0	6.55
6.49	Elevon Effectiveness about Trim M = 6.0	6.56
6.50	Elevon Effectiveness about Trim M = 8.0	6.57
6.51	Elevon Effectiveness about Trim M = 9.0 Low $R_{N\bar{C}}$	6.58
6.52	Elevon Effectiveness about Trim M = 9.0	6.59
6.53	Elevon Effectiveness about Trim M = 11.0	6.60
6.54	Elevon Effectiveness about Trim M = 16.0	6.61
6.55	Elevon Effectiveness about Trim M = 22.0	6.62
6.56	Elevon Effectiveness M = 6.0	6.63

12-20-61

U3-4071-1000 (was BAC 1544-L-R3)

BOEING

NO. D2-80065



FIGURE INDEX (Cont'd)

<u>Figure</u>	<u>Title</u>	<u>Page</u>
6.57	Elevon Effectiveness $M = 8.0$	6.64
6.58	Elevon Effectiveness $M = 9.0$ Low R_{Nc}	6.65
6.59	Elevon Effectiveness $M = 9.0$	6.66
6.60	Elevon Effectiveness $M = 11.0$	6.67
6.61	Elevon Effectiveness $M = 16.0$	6.68
6.62	Elevon Effectiveness $M = 22.0$	6.69
6.63	Aileron Pitch Coupling Subsonic through Super-sonic	6.71
6.64	Aileron Pitch Coupling Normal Force Hypersonic	6.72
6.65	Aileron Pitch Coupling Pitching Moment Hypersonic	6.73
6.66	Pitching Moment Due to Pitching Velocity	6.75
6.67	Pitching Moment Due to Pitching Velocity Low Speed	6.76
6.68	Effect of Mach Number on Elevon Hinge Moment Derivative, $C_{H\delta}$	6.78
6.69	Effect of Mach Number on Elevon Hinge Moment Derivative, $C_{H\delta}$	6.79
6.70	Effect of Mach Number on Elevon Hinge Moment Derivative, $C_{H\delta}$	6.80
6.71	Effect of Mach Number on Elevon Hinge Moment Coefficient, $\alpha = 0^\circ$, $\delta_e = 0^\circ$	6.81
6.72	Effect of Elevon Deflection on Hinge Moment $M = 0.50$	6.82
6.73	Effect of Elevon Deflection on Hinge Moment $M = 0.80$	6.83
6.74	Effect on Elevon Deflection on Hinge Moment $M = 9.90$	6.84
6.75	Effect on Elevon Deflection on Hinge Moment $M = 0.95$	6.85

12-20-61

U3-4071-1000 (was BAC 1544-L-R3)

FIGURE INDEX (Cont'd)

<u>Figure</u>	<u>Title</u>	<u>Page</u>
6.76	Effect of Elevon Deflection on Hinge Moment M = 1.00	6.86
6.77	Effect of Elevon Deflection on Hinge Moment M = 1.10	6.87
6.78	Effect of Elevon Deflection on Hinge Moment M = 1.40	6.88
6.79	Effect of Elevon Deflection on Hinge Moment M = 2.00	6.89
6.80	Effect of Elevon Deflection on Hinge Moment M = 3.50	6.90
6.81	Elevon Float and Trim Comparison, Glider Alone M = 0.50	6.91
6.82	Elevon Float and Trim Comparison, Glider Alone M = 0.80	6.92
6.83	Elevon Float and Trim Comparison, Glider Alone M = 0.95	6.93
6.84	Elevon Float and Trim Comparison, Glider Alone M = 1.00	6.94
6.85	Elevon Float and Trim Comparison, Glider Alone M = 1.10	6.95
6.86	Elevon Float and Trim Comparison, Glider Alone M = 1.40	6.96
6.87	Elevon Float and Trim Comparison, Glider Alone M = 2.00	6.97
6.88	Elevon Float and Trim Comparison, Glider Alone M = 3.50	6.98
6.89	Directional Aerodynamic Center	6.100
6.90	Directional Stability	6.101
6.91	Lateral Stability	6.102
6.92	Side Force Derivative	6.103
6.93	Rudder Effectiveness - Yawing Moment	6.104

12-20-61

U3-4071-1000 (was SAC 1544-L-R3)

BOEING

NO. D2-10065

FIGURE INDEX (Cont'd)

<u>Figure</u>	<u>Title</u>	<u>Page</u>
6.94	Rudder Effectiveness - Rolling Moment	6.105
6.95	Rudder Effectiveness - Side Force Derivative	6.106
6.96	Aileron Effectiveness - Rolling Moment	6.107
6.97	Aileron Effectiveness - Yawing Moment	6.108
6.98	Lateral-Directional Stability - Landing Gear Extended - $M = .26$	6.110
6.99	Lateral-Directional Stability $M = .50$	6.112
6.100	Lateral-Directional Stability $M = .90$	6.113
6.101	Lateral-Directional Stability $M = .95$	6.114
6.102	Lateral-Directional Stability $M = 1.0$	6.115
6.103	Lateral-Directional Stability $M = 1.10$	6.116
6.104	Rudder Effectiveness $M = .50$	6.117
6.105	Rudder Effectiveness $M = .80$	6.118
6.106	Rudder Effectiveness $M = .90$	6.119
6.107	Rudder Effectiveness $M = .95$	6.120
6.108	Rudder Effectiveness $M = 1.10$	6.121
6.109	Single Rudder Characteristics $M = .50$	6.122
6.110	Single Rudder Characteristics $M = .80$	6.123
6.111	Single Rudder Characteristics $M = .90$	6.124
6.112	Single Rudder Characteristics $M = .95$	6.125
6.113	Single Rudder Characteristics $M = 1.10$	6.126
6.114	Aileron Characteristics $M = .50$	6.127
6.115	Aileron Characteristics $M = .80$	6.128
6.116	Aileron Characteristics $M = .95$	6.129
6.117	Aileron Characteristics $M = 1.10$	6.130

12-20-61

U3-4071-1000 (was BAC 1544-L-R3)

FIGURE INDEX (Cont'd)

<u>Figure</u>	<u>Title</u>	<u>Page</u>
6.118	Lateral-Directional Stability $M = 1.4$	6.132
6.119	Lateral-Directional Stability $M = 2.5$	6.133
6.120	Lateral-Directional Stability $M = 3.5$	6.134
6.121	Rudder Effectiveness $M = 1.4$	6.135
6.122	Rudder Effectiveness $M = 2.5$	6.136
6.123	Rudder Effectiveness $M = 3.5$	6.137
6.124	Single Rudder Characteristics $M = 1.4$	6.138
6.125	Single Rudder Characteristics $M = 2.0$	6.139
6.126	Single Rudder Characteristics $M = 3.5$	6.140
6.127	Aileron Characteristics $\xi_a = -10^\circ M = 1.4$	6.141
6.128	Aileron Characteristics $\xi_a = -15^\circ M = 1.4$	6.142
6.129	Aileron Characteristics $\xi_a = -10^\circ M = 2.0$	6.143
6.130	Aileron Characteristics $\xi_a = -15^\circ M = 2.0$	6.144
6.131	Aileron Characteristics $\xi_a = -10^\circ M = 3.5$	6.145
6.132	Aileron Characteristics $\xi_a = -15^\circ M = 3.5$	6.146
6.133	Directional Stability $M = 6.0$	6.148
6.134	Directional Stability $M = 8.0$	6.149
6.135	Directional Stability $M = 9.0$	6.150
6.136	Directional Stability $M = 9.0$ Low R_{No}	6.151
6.137	Directional Stability $M = 11.0$	6.152
6.138	Side Force Derivative $M = 6.0$	6.153
6.139	Side Force Derivative $M = 8.0$	6.154
6.140	Side Force Derivative $M = 9.0$	6.155
6.141	Side Force Derivative $M = 9.0$ Low R_{No}	6.156

FIGURE INDEX (Cont'd)

<u>Figure</u>	<u>Title</u>	<u>Page</u>
6.142	Side Force Derivative $M = 11.0$	6.147
6.143	Lateral Stability $M = 6.0$	6.158
6.144	Lateral Stability $M = 8.0$	6.159
6.145	Lateral Stability $M = 9.0$	6.160
6.146	Lateral Stability $M = 9.0$ Low R_{Nc}	6.161
6.147	Lateral Stability $M = 11.0$	6.162
6.148	Lateral Directional Characteristics $M = 6.0$	6.163
6.149	Lateral Directional Characteristics $M = 8.08$	6.164
6.150	Lateral Directional Characteristics $M = 9.0$	6.165
6.151	Lateral Directional Characteristics $M = 9.0$ Low R_{Nc}	6.166
6.152	Lateral Directional Characteristics $M = 11.0$	6.167
6.153	Rudder Characteristics $\beta = 0$ $M = 6.0$	6.168
6.154	Rudder Characteristics $\beta = -5$ $M = 6.0$	6.169
6.155	Rudder Characteristics $\beta = +5$ $M = 6.0$	6.170
6.156	Rudder Characteristics $\beta = 0$ $M = 8.08$	6.171
6.157	Rudder Characteristics $\beta = -5$ $M = 8.08$	6.172
6.158	Rudder Characteristics $\beta = +5$ $M = 8.08$	6.173
6.159	Rudder Characteristics $\beta = 0$ $M = 9.0$	6.174
6.160	Rudder Characteristics $\beta = -5$ $M = 9.0$	6.175
6.161	Rudder Characteristics $\beta = +5$ $M = 9.0$	6.176
6.162	Aileron Characteristics $\beta = 0$ $M = 8.08$	6.177
6.163	Aileron Characteristics $\beta = -5$ $M = 8.08$	6.178
6.164	Aileron Characteristics $\beta = +5$ $M = 8.08$	6.179

FIGURE INDEX (Cont'd)

<u>Figure</u>	<u>Title</u>	<u>Page</u>
6.165	Aileron Characteristics $\beta = 0$ $M = 9.0$	6.180
6.166	Aileron Characteristics $\beta = -5$ $M = 9.0$	6.181
6.167	Aileron Characteristics $\beta = +5$ $M = 9.0$	6.182
6.168	Effect of Speed Brake Deflection on Trim	6.184
6.169	Effect of Speed Brake on Rudder Effectiveness	6.185
6.170	Effect of Rudder Position on $C_{n\beta}$	6.186
6.171	Effect of Mach Number on Rolling Derivatives	6.188
6.172	Effect of Mach Number on Yawing Derivatives	6.189
6.173	Effect of Angle of Attack on Yawing Derivatives - Landing Speed	6.190
6.174	Effect of Angle of Attack on Rolling Derivatives - Landing Speed	6.191
6.175	Rudder Hinge Moment Coefficient $\alpha = 0^\circ$	6.193
6.176	Rudder Hinge Moment Coefficient $\alpha = 10^\circ$	6.194
6.177	Rudder Hinge Moment Coefficient $\alpha = 15^\circ$	6.195
6.178	Effect of Sideslip on Rudder Hinge Moment	6.196
6.179	Effect of Rudder Deflection on Rudder Hinge Moment $M = 0.50$	6.197
6.180	Effect of Rudder Deflection on Rudder Hinge Moment $M = 0.80$	6.198
6.181	Effect of Rudder Deflection on Rudder Hinge Moment $M = 0.90$	6.199
6.182	Effect of Rudder Deflection on Rudder Hinge Moment $M = 0.95$	6.200
6.183	Effect of Rudder Deflection on Rudder Hinge Moment $M = 1.00$	6.201
6.184	Effect of Rudder Deflection on Rudder Hinge Moment $M = 1.10$	6.202

FIGURE INDEX (Cont'd)

<u>Figure</u>	<u>Title</u>	<u>Page</u>
6.185	Effect of Rudder Deflection on Rudder Hinge Moment $M = 1.40$	6.203
6.186	Effect of Rudder Deflection on Rudder Hinge Moment $M = 2.00$	6.204
6.187	Effect of Rudder Deflection on Rudder Hinge Moment $M = 2.50$	6.205
6.188	Effect of Rudder Deflection on Rudder Hinge Moment $M = 3.50$	6.206
6.189	Summary of Effect on Rudder Deflection on Rudder Hinge Moment	6.207
7.1	Longitudinal Stability - Mach No. Effect Glider + Transition	7.4
7.2	Longitudinal Stability $M = .8$ Glider + Transition	7.5
7.3	Longitudinal Stability $M = .95$ Glider + Transition	7.6
7.4	Longitudinal Stability $M = 1.0$ Glider + Transition	7.7
7.5	Longitudinal Stability $M = 1.1$ Glider + Transition	7.8
7.6	Longitudinal Stability $M = 1.4$ Glider + Transition	7.9
7.7	Longitudinal Stability $M = 2.0$ Glider + Transition	7.10
7.8	Longitudinal Stability $M = 3.5$ Glider + Transition	7.11
7.9	Longitudinal Stability $M = 8.08$ Glider + Transition	7.12
7.10	Pitching Moment due to Pitching Velocity Glider + Transition	7.13
7.11	Elevon Hinge Moment Coefficients - Mach No. Effect Glider + Transition.	7.14

FIGURE INDEX (Cont'd)

<u>Figure</u>	<u>Title</u>	<u>Page</u>
7.12	Elevon Hinge Moment Coefficients $M = .8$ Glider + Transition	7.15
7.13	Elevon Hinge Moment Coefficients $M = .95$ Glider + Transition	7.16
7.14	Elevon Hinge Moment Coefficients $M = 1.0$ Glider + Transition	7.17
7.15	Elevon Hinge Moment Coefficients $M = 1.10$ Glider + Transition	7.18
7.16	Elevon Hinge Moment Coefficients $M = 1.40$ Glider + Transition	7.19
7.17	Elevon Hinge Moment Coefficients $M = 2.0$ Glider + Transition	7.20
7.18	Elevon Hinge Moment Coefficients $M = 3.5$ Glider + Transition	7.21
7.19	Aerodynamic Center vs M Transition Section On	7.24
7.20	Yawing Moment Coefficient vs M Transition Section On	7.25
7.21	Side Force Coefficient vs M Transition Section On	7.26
7.22	Directional Stability $M = .5$	7.27
7.23	Directional Stability $M = .9$	7.28
7.24	Directional Stability $M = .95$	7.29
7.25	Directional Stability $M = 1.0$	7.30
7.26	Directional Stability $M = 1.1$	7.31
7.27	Directional Stability $M = 1.4$	7.32
7.28	Directional Stability $M = 2.0$	7.33
7.29	Directional Stability $M = 3.5$	7.34
7.30	Directional Stability $M = 8.0$	7.35
7.31	Rudder Hinge Moments $\alpha = 0$ Transition Section On	7.36

FIGURE INDEX (Cont'd)

<u>Figure</u>	<u>Title</u>	<u>Page</u>
7.32	Rudder Hinge Moments $\alpha = 10$ Transition Section On	7.37
8.1	Effects of Flexibility - Directional	8.2
8.2	Effects of Flexibility - Longitudinal M = 1.7	8.3
8.3	Effects of Flexibility - Longitudinal M = 3.5	8.4
9.1	Effects of Mach Number and α_w on Control Surface Derivatives	9.2
9.2	Effects of Mach Number and α_w on Captive Loads at Zero Control Deflection	9.3
10.1	Maximum Lift to Drag Ratio	10.3
10.2	Zero Lift Drag Coefficient	10.4
10.3	Lift Coefficients	10.5
10.4	Angle of Attack	10.6
10.5	Landing Speed Lift Curves	10.7
10.6	Subsonic Lift Curves	10.8
10.7	Supersonic Lift Curves	10.9
10.8	Lift Curve at $M_\infty = 8.1$	10.10
10.9	Effect of Altitude on $M_\infty = 16.5$ Lift Coefficient	10.11
10.10	Effect of Altitude on $M_\infty = 22$ Lift Coefficient	10.12
10.11	Effect of Altitude on $M_\infty = 28$ Lift Coefficient	10.13
10.12	Landing Speed Drag Polars	10.14
10.13	Subsonic Drag Polars	10.15
10.14	Supersonic Drag Polars	10.16
10.15	Drag Polar at $M_\infty = 8.1$	10.17
10.16	Effect of Altitude on $M_\infty = 16$ Drag Polars	10.18

12-20-61

U3-4071-1000

BOEING

NO. D2-80065

FIGURE INDEX (Cont'd)

<u>Figure</u>	<u>Title</u>	<u>Page</u>
10.17	Effect of Altitude on $M_{\infty} = 24$ Drag Polars	10.19
10.18	Effect of Altitude on $M_{\infty} = 28$ Drag Polars	10.20
10.19	Landing Speed C_x vs α	10.21
10.20	Subsonic C_x vs α	10.22
10.21	Supersonic C_x vs α	10.23
10.22	Hypersonic Axial Force Coefficients	10.24
10.23	Zero Lift Drag Coefficient Abort Vehicle - Power On	10.26
10.24	Transonic Lift Curves Abort Vehicle - Power On	10.27
10.25	Supersonic Lift Curves Abort Vehicle - Power On	10.28
10.26	Transonic Drag Polars Abort Vehicle - Power On	10.29
10.27	Supersonic Drag Polars Abort Vehicle - Power On	10.30
10.28	Transonic Axial Force Curves Abort Vehicle - Power On	10.31
10.29	Supersonic C_x vs α Abort Vehicle - Power On	10.32

1.0 INTRODUCTION

This document is prepared in fulfillment of the requirements of paragraph B(1.1.1.1.3.1) of the Statement of Work, System 620A Dyna Soar (Step I), Exhibit 620A-61-28, dated 1 September 1961. The purpose of this document is to present the current status of the Dyna Soar glider's stability and control aerodynamic characteristics.

The contents include static and rotary force and moment coefficients, trim characteristics, control surface hinge moments, limited effects of flexibility and thermal deformation and aerodynamic performance characteristics. Limited data is also presented on the glider and abort vehicle in the presence of the air carrier.

The purpose of this document has also been broadened to the extent that it becomes the primary vehicle of aerodynamic data and flight constraints for flight control subsystem design and simulator design. New data sections including performance, constraints due to aerodynamic heating and loads, and glider aerodynamic characteristics in the presence of the air carrier for drop tests have been added to fulfill the documents broader objectives.

Significant changes have been made in the glider and abort vehicle aerodynamic configuration to warrant a complete revision of this document. These changes are described in detail in Section 3 "Configuration Description". Time has not permitted complete wind tunnel test verification over the flight regime of the latest configuration.

Periodic revisions to this document are scheduled for the future. Additions and revisions to the data presented will be made at these times pending the results of additional wind tunnel data and analysis.

12-20-61
U3-4071-1000

BOEING

NO. D2-80065

2.0

REFERENCES

1. Boeing Document D2-6444, "IBM 704 Compressible Laminar Boundary Layer Program # 1" by K. Halvorson and C. Cassmeyer.
2. Boeing Aero-Performance CS #28, "Results from Digital Programs Solving the Laminar Compressible Boundary Layer" 24 August 1960.
3. NASA TMX-287, Theoretical Stability Derivatives for the X-15 Research Airplane at Supersonic and Hypersonic Speeds Including a Comparison with Wind Tunnel Results, by Walker and Wolowicz, August 1960.
4. C110-10440, Dyna-Soar I Configuration Evaluation Wind Tunnel Test Report Series II, Bell Aircraft Corporation, May 1959.
5. Donovan and Lawrence, "Aerodynamic Components of Aircraft at High Speeds," High Speed Aerodynamics and Propulsion Series, Vol. 7, Princeton University Press, 1957, pp. 150 to 172.
6. Boeing Document D3-3712, "Aerodynamic Analysis Report of B-52/Dyna-Soar Glider Wind Tunnel Test," BTWT 647, October 24, 1961.
7. Appropriate Wind Tunnel Tests

BTWT 634	D2-8225, Data Report, Boeing Transonic Wind Tunnel Test Number 634 Low Speed Longitudinal and Lateral Stability Tests of AD544I-1 A 0.15 Scale Model of the Dyna-Soar Step I Glide Vehicle.
BTWT 655	D2-80298 Data Report, 655 Transonic Speed Test of the Dyna-Soar Glider
BTWT 672	D2-80494 Unreleased Document
BTWT 680	No document number or title at this date.
BTWT 682	No document number or title at this date.
BTWT 685	No document number or title at this date.
BSWT 105	D2-80347 Unreleased
BSWT 113	D2-80407 Unreleased
BSWT 113B	D2-80492 Unreleased
BAC 18	D2-80006 Data Report AC Tunnel B Boeing Test No. 18 Hypersonic Stability and Performance Tests of AD540I-1 A .066 Scale Model of Dyna-Soar.
BAC 21	D2-80418 Unreleased document.

12-20-61
U3-4071-1000

BOEING

NO. D2-80065

CONFIDENTIAL**3.0 CONFIGURATION DESCRIPTION****3.1 CONFIGURATION DESCRIPTION - GLIDER**

A three view drawing of the model 844-2050 Revision D glider is presented in Figure 3.1. The glider is shown in the cold shape or jig condition as would exist prior to re-entry. A photograph of an .067 scale model of this configuration is shown on Figure 3.2.

Features significant to the stability and control characteristics are discussed in the following paragraphs.

The wing is essentially triangular in planform with a leading edge sweep angle of $72^{\circ} 48'$.

The lower surface of the wing is a flat surface with a positive nose incidence of 3° occurring at Body Station 299.00. Thermal deformation will increase this nose bend up to approximately 4° . The clearance between the outboard edge of the elevon and the rudder actuator housing has taken the form of a tapered gap. This gap has been minimized to allow maximum longitudinal stability in the subsonic-transonic regime while still satisfying the thermal expansion requirements for clearance at hypersonic speeds.

The forebody nose contours have the greatest destabilizing effect in yaw. These contours are determined from aerodynamic considerations, structural, space, and visibility requirements. A ramp, commencing at Body Station 388.5 and expanding to a thickness of 12.0 inches at the aft end of the body, has been added to the top surface of the body. This ramp produces a positive C_m shift and a reduction in elevon hinge moments at low supersonic speeds. This ramp has also a favorable effect on transonic directional stability. The APU exhaust ports are relocated on the ramp.

A probable critical temperature problem innate to the previous cab-heatshield design has required a modification of these parts. The changes have essentially raised the top portion of the heatshield and replaced the radial fairing between the top and front of the cab with a flat surface.

The speed brake has been deleted. Studies have revealed that the simultaneous outboard deflection of the rudders will provide the necessary braking effect.

The vertical tail must provide an efficient lifting surface and yet be of minimum dimensions for weight, drag, structural, and thermal requirements. The existing planform of 844-2050 D glider has an area of 31.3 ft.² per side with a 55° leading edge sweep. The tail is located as far aft of the center of gravity as structurally possible for static directional stability and on the wing tips to minimize wing and body interference. The tails are canted inboard

12-20-61

U3 4070 7000 REV. 5/61

CONFIDENTIAL**BOEING**

NO. D2-80065

Approved For Release 2003/10/15 : CIA-RDP70B00584R000200010001-1

PAGE 3.1

25100

CONFIDENTIAL

5.1

CONFIGURATION DESCRIPTION - GLIDER (Cont'd)

at an angle of $9^{\circ} 56'$ to give increased directional stability through small angles of sideslip at hypersonic speeds.

A significant change in the vertical tail for this configuration is the increased thickness of 8.0 inches. The leading edge of the fin is made up of a 3.0 inch radius which satisfies the heating design requirement, and a flat surface required to complete the 8.0 inch thickness. However, this "radius-flat" leading edge fairs into a 4.00 inch radius leading edge at the rudder.

Physical dimensions of the actuators have required the enlargement of the rudder actuator housings. Other modifications, primarily required for heating and clearance requirements, are the 4.0 inch radius on the upper fin at the rudder hinge line and a 20.0 inch radius on the lower rudder at the hinge line.

The rudders will be trailed inboard $6^{\circ} 0'$ from the faired position to reduce hinge moments for the subsonic through low supersonic speed range. To obtain the directional stability required at higher speeds, the rudders will be in the faired position as shown in Figure 3.1. The position of the rudder trail will be controlled by the pilot. The rudders will be deflected together and will be capable of 35° outboard and 12° inboard deflection.

Aerodynamic control about the pitch and roll axis is provided by the trailing edge elevons. The elevon planform has been influenced by several design considerations. The inboard edge is determined by structural and space requirements. The sweep and radius of the outboard edge and leading edge are determined by aerothermodynamic limits and by the rudder actuator housing. The trailing edge and sweep has been determined by planform studies of sweep angle for best stability. The elevons have the hinge lines normal to the plane of symmetry of the vehicle. The trailing edges are swept $10^{\circ} 28'$. The outboards edges have been modified to obtain a minimum gap and to conform to the enlarged rudder actuator housing. These boundaries have produced a total elevon area of 46.0 ft.^2 with a minus $10^{\circ} 0'$ wedge cross section.

The elevons provide the glider with adequate pitch control to trim and maneuver the glider. The differential use of the elevons provides the necessary roll control. The elevons must also provide adequate control moments for augmentation as required by the Flight Control System. The deflections of the elevons are 55° up and 16° down at a deflection rate of $20^{\circ}/\text{sec.}$ under no load.

The glider landing gears, equipped with uncooled all-skid surfaces, utilize the tricycle arrangement. All three struts and skids retract

CONFIDENTIAL**BOEING**

NO. D2-80065

CONFIDENTIAL**3.1** CONFIGURATION DESCRIPTION - GLIDER (Cont'd)

forward for storage. The gear is extended by a gas system with aerodynamic assist. The rate of extension is controlled by the snubbing action of the gas actuators. No sequencing of the gear is currently planned during extension.

The reaction control system used for control during orbital flight and for augmenting the aerodynamic control surfaces in the upper atmosphere are powered by a H_2 and O_2 fueled hot gas system. Pilot control inputs are accomplished through the sidestick controller when the stick deflection exceeds a predetermined dead band. These inputs operate on-off valves at the reaction nozzles. The reaction nozzles are located on the glider to give control about the three vehicle axes. The pitch up nozzles are atop the body and aft at Body Station 450.0. The pitch down nozzles are on the lower surface of the actuator housing at Body Station 473.67. The roll nozzles are on the upper surfaces of the wing at Body Station 355.3 and Buttock Line 72.0. The yaw nozzles are near the aft end of the body at Body Station 452.3 and Water Line 124.3.

A more detailed description of the configuration and systems is included in Reference Number .

3.2 THIRD STAGE CONFIGURATION

The glider and booster are integrated into an overall flight vehicle by means of a transition section which serves as the structural connection and aerodynamically smooth fairing between the booster and glider. The transition section general arrangement is shown in Figure 3.1 .

The glider abort and air launch system consists of the glider plus transition section which contains the acceleration rocket. To achieve additional control during abort, the thrust vector control of the acceleration rocket is used along with the aerodynamic controls.

The acceleration rocket is a solid propellant rocket with a propellant weight of 2200 pounds. The four nozzles are all hinged and located with centers on 45 diagonals in the rear view. They may be all used in pitch, yaw, roll or combinations required.

3.3. WEIGHTS AND MOMENTS OF INERTIA

The design weights and moments of inertia for the glider vehicle are presented below.

CONFIDENTIAL

3.3 WEIGHTS AND MOMENTS OF INERTIA

For the glider alone (transition section off):

Weight = 10000 lbs.

Principle moments of inertia about C.G.:

$$\begin{aligned} I_y &= 19,229 \text{ slugs} - \text{ft}^2 \text{ (pitch)} \\ I_y &= 4378 \text{ slugs} - \text{ft}^2 \text{ (roll)} \\ I_x &= 22,103 \text{ slugs} - \text{ft}^2 \text{ (yaw)} \end{aligned}$$


The nominal center of gravity for the glider alone is at Body Station 355.3 and Water Line 124. See Figure 3.1.

For the 10000 lb. glider plus third stage, Figure 3.3 gives the moments of inertia, gross weight, and center of gravity from the beginning to the end of third stage burning.

3.4 AERODYNAMIC DATA AND REFERENCE CONSTANTS

Aerodynamic data in the document are presented on a fixed body axis system. The axis system is shown on Figure 3.4. Definition of angle of attack and sideslip and the sign convention for the force and moment coefficients are also shown. The sign conventions for control deflections are shown on Figure 3.5.

Reference constants and glider alone center of gravity location are shown on Figure 3.6. Some significant aerodynamic configuration constants are also presented.

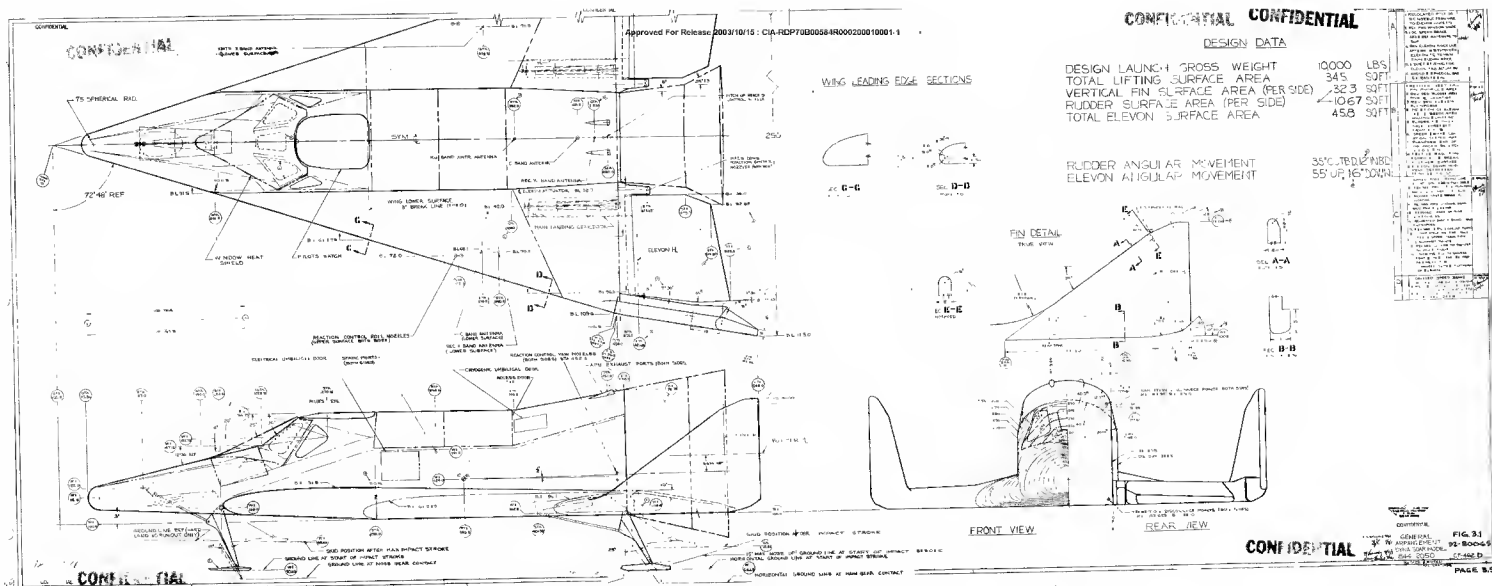





2A 73512

CONFIDENTIAL

DATA IS DERIVED FROM PREVIOUS MASS DATA CONSIDERING ONLY THE REDUCTION OF 1000 LBS. PROPELLANT. CHANGES DUE TO ALTERATIONS IN TRANSITION AND ROCKET INERTS ARE NOT CONSIDERED.

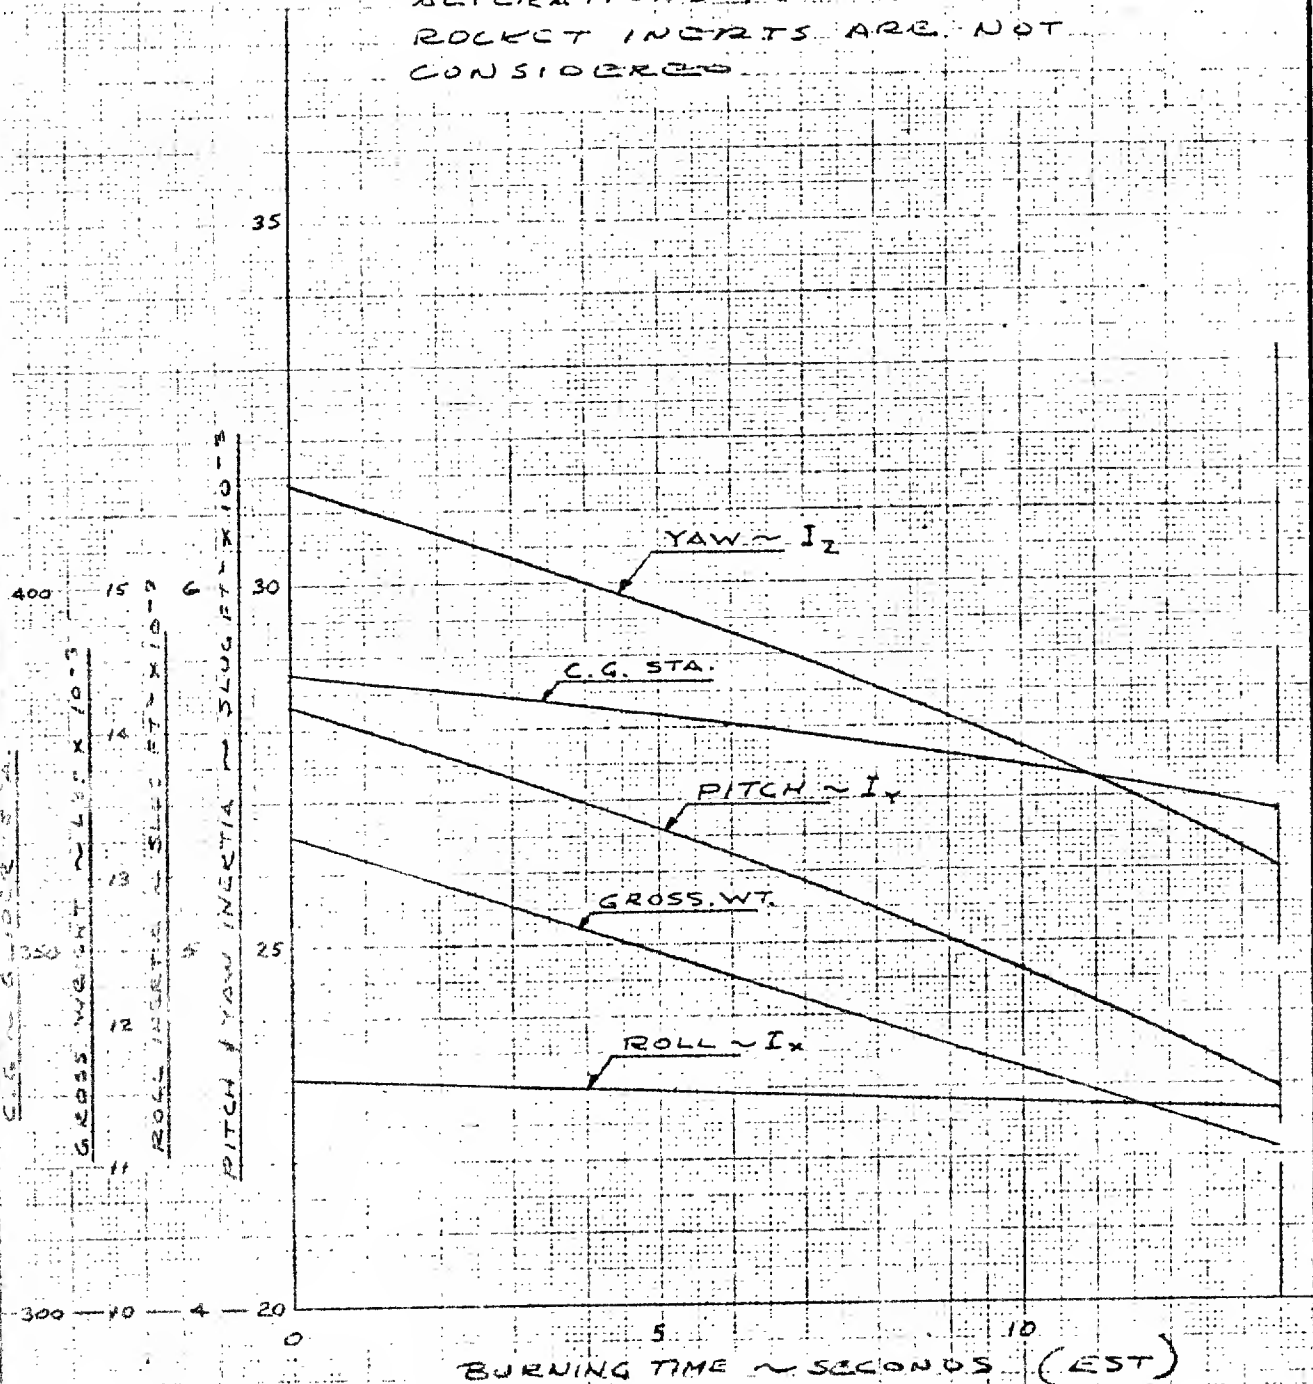

CALC	bwR	1/24/61	REVISED	DATE	EST. MASS DATA	FM. 33
CHECK					GLIDER + 3 RD STAGE	D2-1
APR					(2200 # PROPELLANT)	2050
APR						D2-80065
<p>CONFIDENTIAL</p> <p>BOEING AIRPLANE COMPANY</p> <p>Approved For Release 2003/10/15 : CIA-RDP70B00584R000200010001-1</p>						PAGE 3.7

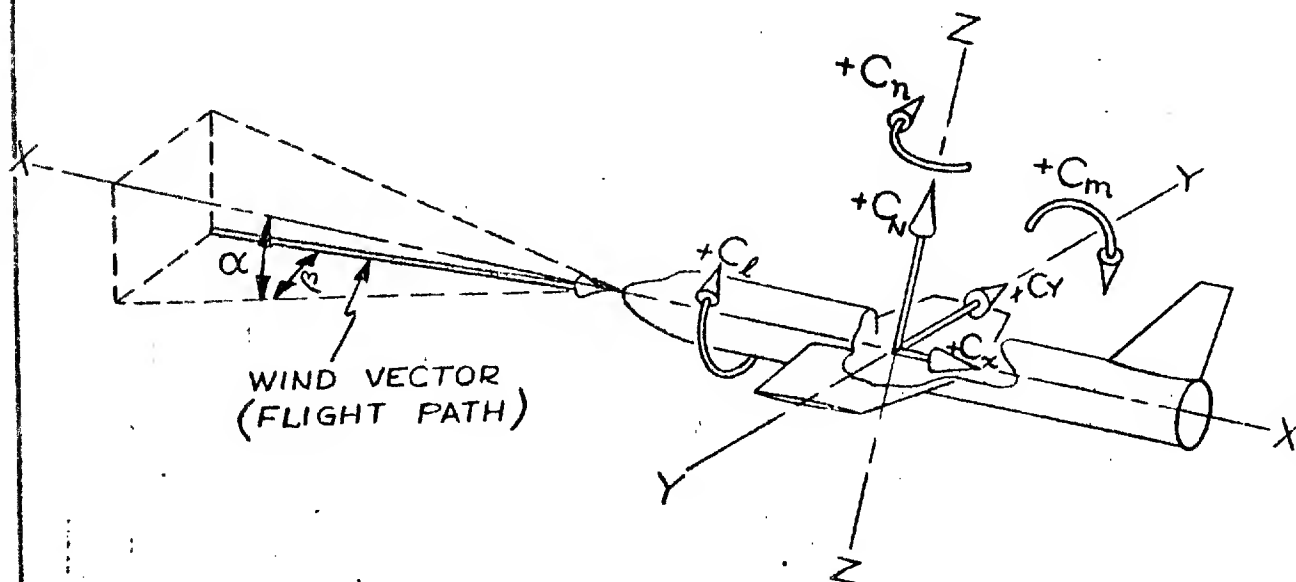


NOTES:

- 1) THE MUTUALLY PERPENDICULAR X, Y, AND Z AXES ARE FIXED ON THE AIRPLANE, REGARDLESS OF FLIGHT ATTITUDE.
- 2) ANGLE OF ATTACK IS MEASURED IN THE AIRPLANE PLANE OF SYMMETRY (X-Z PLANE), BETWEEN THE AIRPLANE X-AXIS AND THE PROJECTION OF THE WIND VECTOR INTO THE X-Z PLANE.
- 3) ANGLE OF SIDESLIP IS MEASURED IN OR PARALLEL TO THE PLANE DEFINED BY THE AIRPLANE Y-AXIS AND THE WIND VECTOR, BETWEEN THE WIND VECTOR AND THE PROJECTION OF THE AIRPLANE X-AXIS INTO THE ABOVE-DEFINED PLANE.
- 4) FOR THE DYNA SOAR 844-2050 CONFIGURATION, THE X-Y PLANE IS PARALLEL TO THE FLAT, AFT PART OF THE WING UNDERSURFACE.

FIG. 3.4


CRUC			REVISED	DATE	BODY AXIS SYSTEM	844-20500
CHECK			12-2-61		NOMENCLATURE ~ COMBINED	
APR					ANGLE OF ATTACK & SIDESLIP	02-80065
APR					BOEING AIRPLANE COMPANY	PAGE 3.8
DWN	M. CARTER	12-28-0				

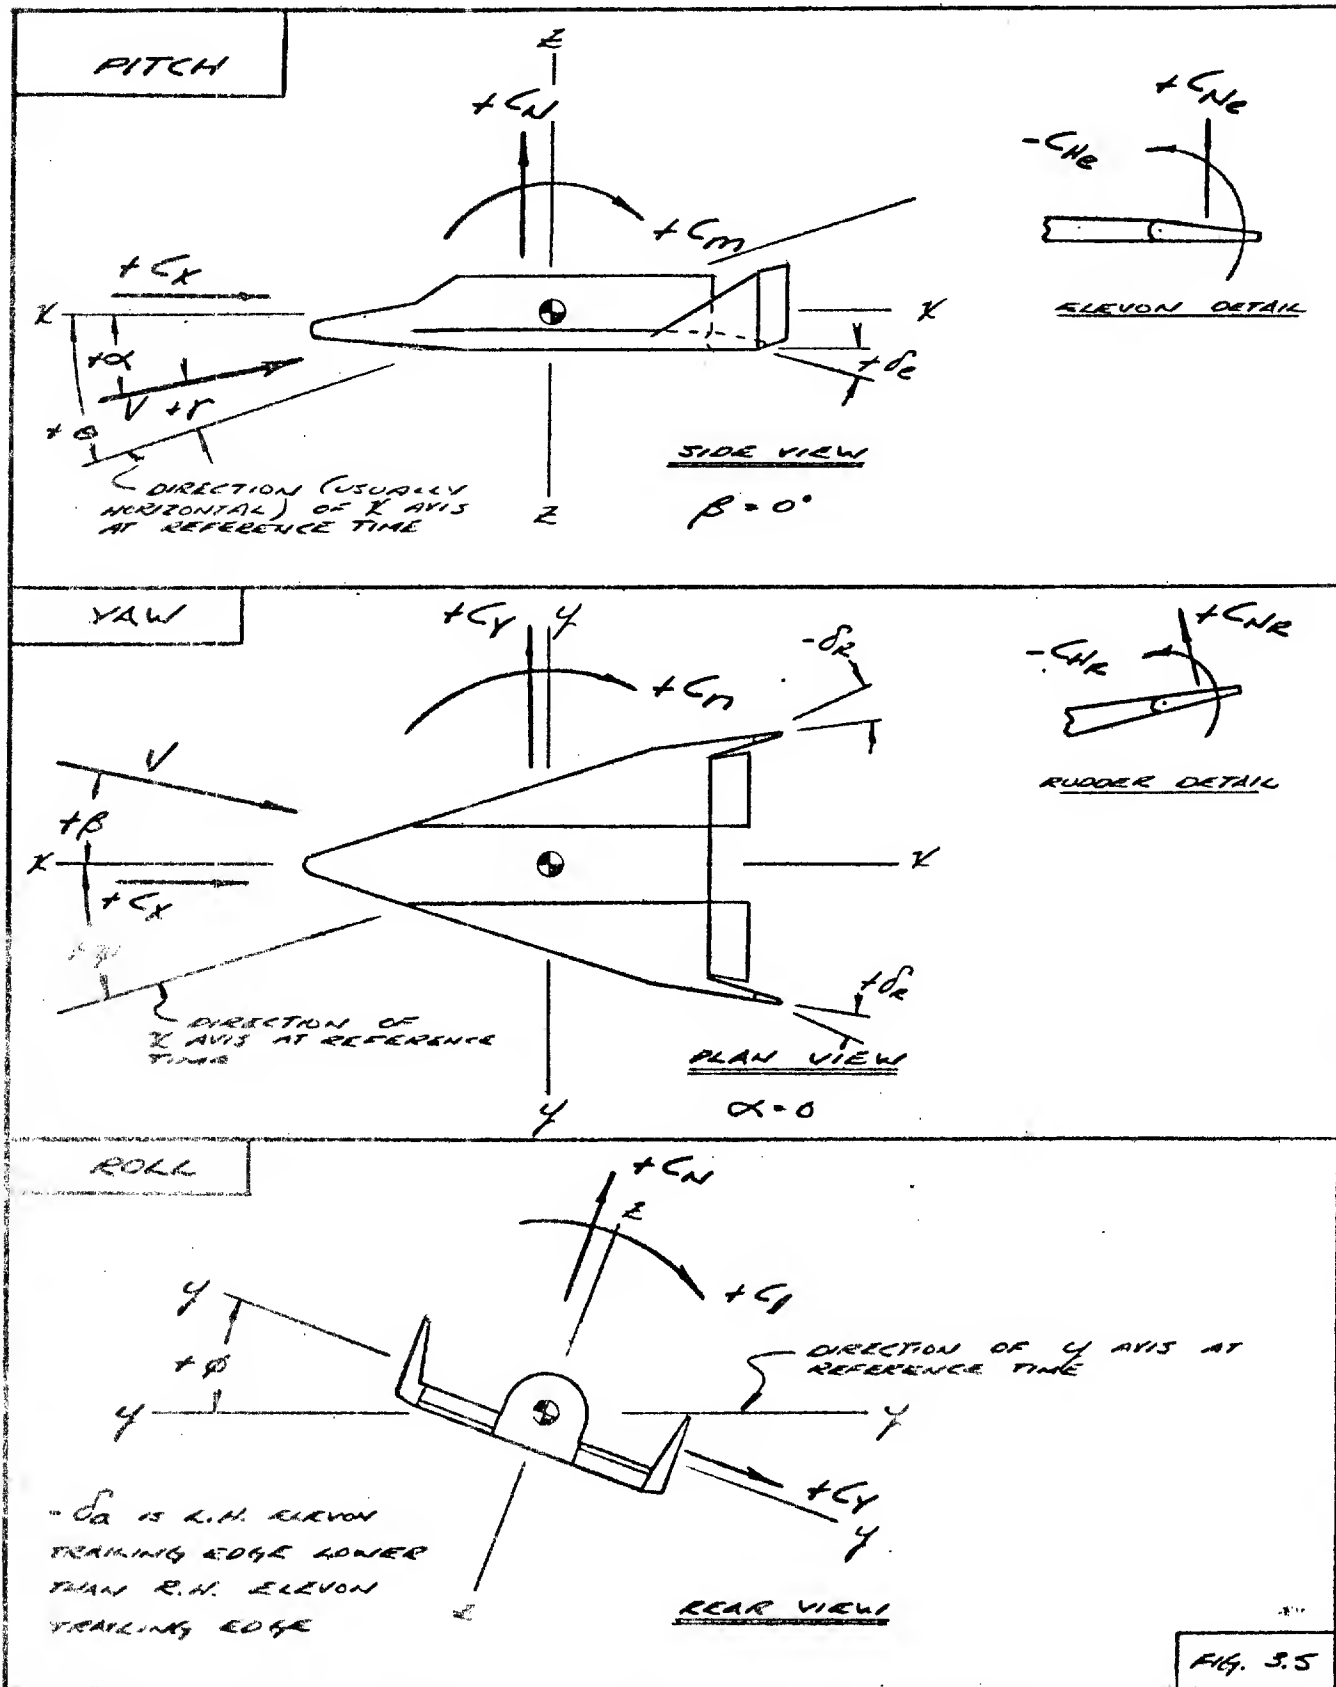

CALC		REVISED	DATE	BODY AXIS SYSTEM NOMENCLATURE	844 2050 0
CHECK		Signature	12/11/1		
APR			12/28/1		DL-80065
APR					PAGE 3.9

CONFIDENTIAL

Approved For Release 2003/10/15 : CIA-RDP70B00584R000200010001-1

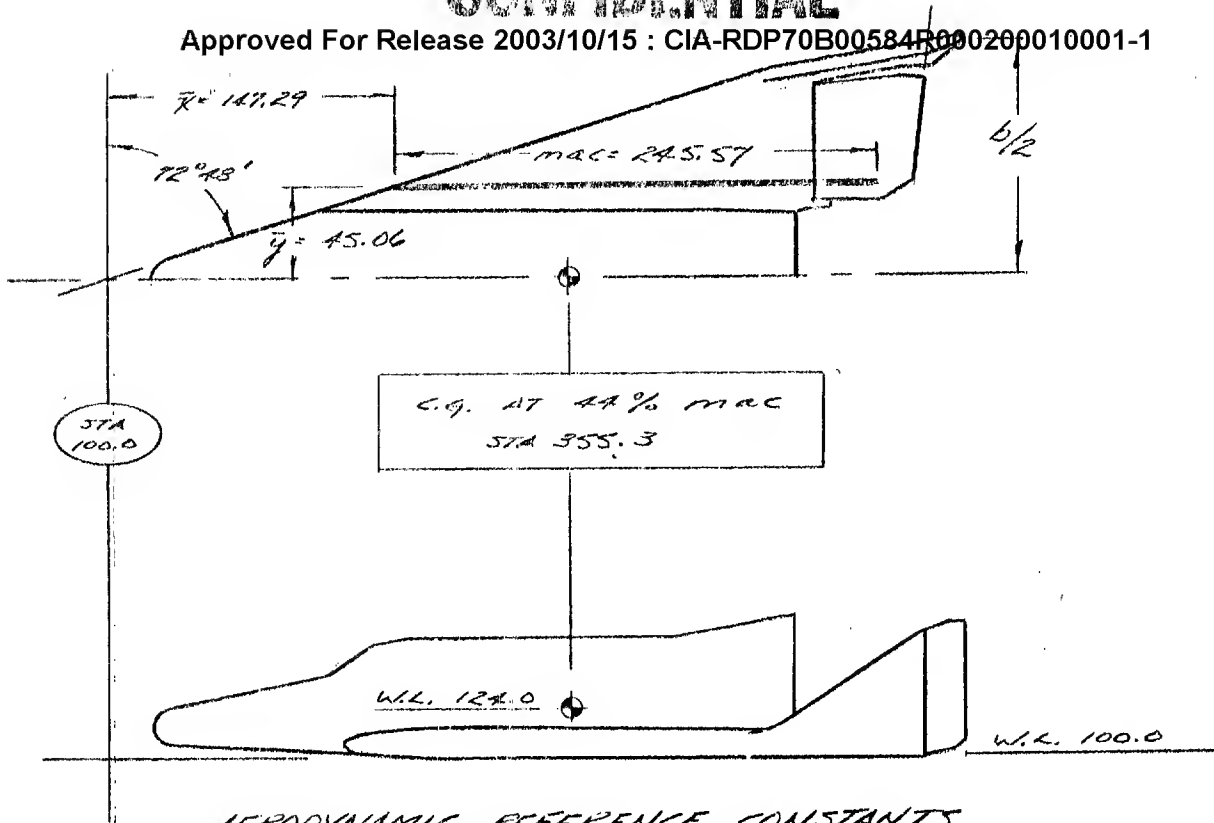

AERODYNAMIC REFERENCE CONSTANTS

S_w , WING AREA 345 FT.²
 MAC , MEAN AERODYNAMIC CHORD 245.57 IN.
 b , SPAN 245.48 IN.
 AR , ASPECT RATIO 1.21

VERTICAL TAIL

S_{VT} , TAIL AREA (AER SIDE) 31.3 FT.²
 S_{VT}/S_w , BOTH SIDES 0.182
 l_{VT} 148.88 IN.
 $\bar{V}_{VT} = \frac{S_{VT} l_{VT}}{S_w b}$, BOTH SIDES 0.110

RUDDER

S_R , RUDDER AREA (AER SIDE) 10.6 FT.²
 S_R/S_w , (BOTH RUDDERS) 0.061
 l_R 175.5 IN.
 $\bar{V}_R = \frac{S_R l_R}{S_w b}$, (BOTH RUDDERS) 0.044
 $2MA$ 245 IN.-FT.²

ELEVON

S_E , TOTAL ELEVON AREA 46.0 FT.²
 S_E/S_w , TOTAL AREA 0.133
 l_E 138.9 IN.
 $\bar{V}_E = \frac{S_E l_E}{S_w b}$, TOTAL AREA 0.075
 $2MA$ 1195 IN.-FT.²

CALC	SWATA	12-15-1	REVISED	DATE
CHECK				
APR				
APR				

AERODYNAMIC REFERENCE
 CONSTANTS

BOEING AIRPLANE COMPANY

FIG. 3.6
BAA-2050 D
02-80065
PAGE 3.10

Approved For Release 2003/10/15 : CIA-RDP70B00584R000200010001-1

4.0 DEFINITION OF SYMBOLS

a.c.	aerodynamic center
A/F	airframe
b	wing span
B.L.	buttock line
B.S.	body station
c.g., C.G.	center of gravity
C_D	drag coefficient
δ_{eL}	left rudder deflection
δ_{eR}	right rudder deflection
W_p	weight of acceleration rocket propellant
W	glider weight
q, \bar{q}, Q	dynamic pressure
M	Mach number
I_x	moment of inertia about x axis
I_y	moment of inertia about y axis
I_z	moment of inertia about z axis
$C_{H\beta}$	$\partial C_H / \partial \beta$
$C_{H\delta_e}$	$\partial C_H / \partial \delta_e$
$C_{H\alpha}$	$\partial C_H / \partial \alpha$
C_{H0}	hinge moment coefficient at $\alpha = 0, \delta_e = 0, \delta_r = 0, \beta = 0$
C_{He}, C_{Hc}	elevon hinge moment coefficient
C_{Hr}, C_{Hr}	rudder hinge moment coefficient
g, G	acceleration due to gravity
n, g	load factor = $\frac{\text{lift}}{\text{weight}}$
V	resultant wind velocity or free stream velocity
W.L.	water line

\bar{c} or m.a.c.

C_L

C_m

C_{m_0}

C_{mq}

$C_{m\alpha}$

$C_{m\dot{\alpha}}$

$C_{m\delta_a}$

$C_{m\delta_e}$

C_n

C_{np}

C_{nr}

$C_{n\delta_a}$

$C_{n\delta_R}$

$C_{n\beta}$

$C_{n\dot{\beta}}$

C_N

$C_{N\alpha}$

$C_{N\dot{\alpha}}$

$C_{N\delta_a}$

$C_{N\delta_e}$

C_{Nq}

C_x

C_y

$C_{y\beta}$

$C_{y\dot{\beta}}$

mean aerodynamic chord

lift coefficient, $\frac{L}{q S_w}$

pitching moment coefficient, $\frac{M}{q S_w \bar{c}}$

pitching moment coefficient at zero lift

$$= \partial C_m / \partial (q \bar{c} / 2v)$$

$$= \partial C_m / \partial \alpha$$

$$= \partial C_m / \partial (\dot{\alpha} \bar{c} / 2v)$$

$$= \partial C_m / \partial \delta_a$$

$$= \partial C_m / \partial \delta_e$$

yawing moment coefficient, $\frac{N}{q S_w b}$

$$= \partial C_n / \partial (p b / 2v)$$

$$= \partial C_n / \partial (r b / 2v)$$

$$= \partial C_n / \partial \delta_a$$

$$= \partial C_n / \partial \delta_R$$

$$= \partial C_n / \partial \beta$$

$$= \partial C_n / \partial (\dot{\beta} b / 2v)$$

normal force coefficient, $\frac{N}{q S_w}$

$$= \partial C_N / \partial \alpha$$

$$= \partial C_N / \partial (\dot{\alpha} \bar{c} / 2v)$$

$$= \partial C_N / \partial \delta_a$$

$$= \partial C_N / \partial \delta_e$$

$$= \partial C_N / \partial (q \bar{c} / 2v)$$

axial force coefficient, $\frac{X}{q S_w}$

side force coefficient, $Y / q S_w$

$$= \partial C_Y / \partial \beta$$

$$= \partial C_Y / \partial (\dot{\beta} b / 2v)$$

12-10-61

BAC 1346 L R3

S_e or S_E	elevon area
S_r or S_R	rudder area
S_t	wing tip extension area
S_w	wing area
V	velocity
X	force along X (roll) axis
Y	force along Y (pitch) axis
α	angle of attack
α_{OL}	angle of attack at zero lift
β	angle of sideslip
δ_a	aileron deflection angle = $\frac{\delta_{e_R} - \delta_{e_L}}{2}$
δ_{e_L}	left elevon deflection angle
δ_{e_R}	right elevon deflection angle
δ_e or δ_E	elevon deflection angle, elevons deflecting together
δ_R	rudder deflection angle
θ	pitch angle
ϕ	roll angle
ψ	yaw angle
λ	wing taper ratio $\frac{c_t}{c_r}$
C_L	rolling moment coefficient, $\frac{l}{q S_w b}$
C_{Lp}	= $\partial C_L / \partial (pb/2V)$
C_{Lr}	= $\partial C_L / \partial (rb/2V)$
$C_{L\beta}$	= $\partial C_L / \partial \beta$
$C_{L\dot{\beta}}$	= $\partial C_L / \partial (\dot{\beta} b/2V)$
$C_{L\delta_a}$	= $\partial C_L / \partial \delta_a$
$C_{L\delta_R}$	= $\partial C_L / \partial \delta_R$

12-20-61

BAC 1346 L-83

BOEING

NO D2-80065

$C_{Y\delta a}$

$$= \partial C_Y / \partial \delta a$$

$C_{Y\delta r}$

$$= \partial C_Y / \partial \delta r$$

C_{Yp}

$$= \partial C_Y / \partial (pb/2v)$$

C_{Yr}

$$= \partial C_Y / \partial (rb/2v)$$

C_h

hinge moment coefficient, $\frac{HM}{q S_e c_e}$

$$= \partial C_h / \partial \alpha$$

$C_{h\alpha}$

$$= \partial C_h / \partial \delta e$$

$C_{h\delta e}$

$$M_a = \int y da$$

Moment area of the control surface
aft of the hinge line.

12-20-61

BAC 1346 L-R3

CONFIDENTIAL

5.0 CONSTRAINTS DUE TO AERODYNAMIC HEATING AND LOADS

5.1 INTRODUCTION

Various constraints are placed upon the glider and air vehicle performance by aerodynamic heating and/or loads. Generally, these constraints take the form of a lower limit in allowable altitude at a given velocity and vehicle attitude. Such limits may result from

- (a) Temperature limit capability - a function only of aerodynamic heating rate, surface emissivity, maximum allowable temperature, and thermal storage. (The effect of thermal storage is very small for most Dyna-Soar conditions.)
- (b) Combined temperature/load limit capability - same as (a) except allowable temperature depends on local pressure.
- (c) Structural load factor capability.
- (d) Panel flutter characteristics.

There are two general classes of limits: basic limits, which define the altitude-velocity-attitude region in which the vehicle can operate, and control surface limits, which primarily define the allowable control surface deflection limits at a given flight condition. Basic limits are given in Section 5.2 and control surface limits in Section 5.3.

5.2 BASIC LIMITS

Glider limits for zero control surface deflection are shown in Figures 5.1 through 5.3. Limits are applicable to three phases of flight, 1) boost, 2) reentry and 3) abort conditions after separation. As such, they define minimum allowable altitude for a given Mach number or velocity as a function of vehicle attitude.

Limits imposed during boost (Figure 5.1) have been evaluated under static conditions and define maximum structural load capability of the air vehicle for the Mach numbers indicated. During higher speed phases of boost, the glider limits given below must not be exceeded. Limits due to booster case heating are transient in nature, requiring evaluation for each specific trajectory, and consequently are not shown.

Limits imposed during reentry (Figure 5.2) are based on panel flutter characteristics and structural load factor capability at

17-20-61

US 4070 7000 (WAS BAC 1546 F-N3)

CONFIDENTIAL

BOEING

NO. D2-80065

PAGE 5.1

2-5000

CONFIDENTIAL

velocities from 1000 fps to 3000 fps. The limit is defined by combined temperature/load limit capability of the vehicle from a velocity of 4000 fps through 16,000 fps. Above 16,000 fps, steady state allowable temperatures define the limit which are a function only of aerodynamic heating surface emissivity and maximum allowable temperature.

There are no constraints imposed on the air vehicle at the initiation of abort except those limits imposed during normal boost. However, boost cannot be initiated in a manner that would cause the glider to penetrate the recovery ceiling or the basic reentry limits shown in Figure 5.2 and/or 5.3.

Limits of the glider and transition section after abort has been initiated and separation occurred is shown in Figure 5.3. Structural capability is that limited by load factor, flutter and thermal considerations, whichever is the most restrictive.

5.3 CONTROL SURFACE LIMITS

Steady state control surface limits are given for unyawed flight in Figures 5.4 through 5.20 (elevons) and Figures 5.21 through 5.29 (rudders). Limits are shown in terms of minimum allowable altitude for given velocity, vehicle attitude for given velocity, vehicle attitude, and control surface deflection; conversely, they may be interpreted as maximum allowable control surface deflection for given flight condition and vehicle attitude.

Limits shown are based on steady state equilibrium skin temperatures only, and are determined by upper and lower elevon surfaces, respectively, for up and down elevon deflection, and by the rudder outboard surface. No reduction in temperature capability due to loads has been included, nor any allowance for thermal storage effects.

Upper elevon surface material characteristics are such that a certain amount of transient capability is provided; that is, the steady state up-elevon deflection limits may be exceeded for limited periods during transient maneuvers.

Little transient capability is provided by surface material characteristics of the lower elevon and outboard rudder surfaces. The effect of loads and transients will be included in future revisions.

Basic glider limit lines shown in Figure 5.2 are repeated as the lower envelope of the control surface lines of Figures 5.4 through 5.29. Also shown for comparison purposes are the glider limit altitudes based on maximum allowable temperature only, neglecting loads.

CONFIDENTIAL**BOEING**

NO. D2-80065

PAGE 5.2

CONFIDENTIAL

Adjustments to rudder deflection limits for the effect of sideslip are made with the aid of Figures 5.30 through 5.33, in which the deflection limits including sideslip are presented as a function of zero-sideslip limits. As the effect of sideslip varies with angle of attack, plots are presented for $\alpha = 17.5, 30, 40, \text{ and } 55^\circ$.

Effects of yaw on elevon deflection limits have not yet been determined, but are thought to be relatively small. They will be included in future revisions of this document.

12-20-61

US 4070 7000 (WAS BAC 1546 F-R3)

CONFIDENTIAL

BOEING

NO. D2-80065

PAGE 53

CONFIDENTIAL

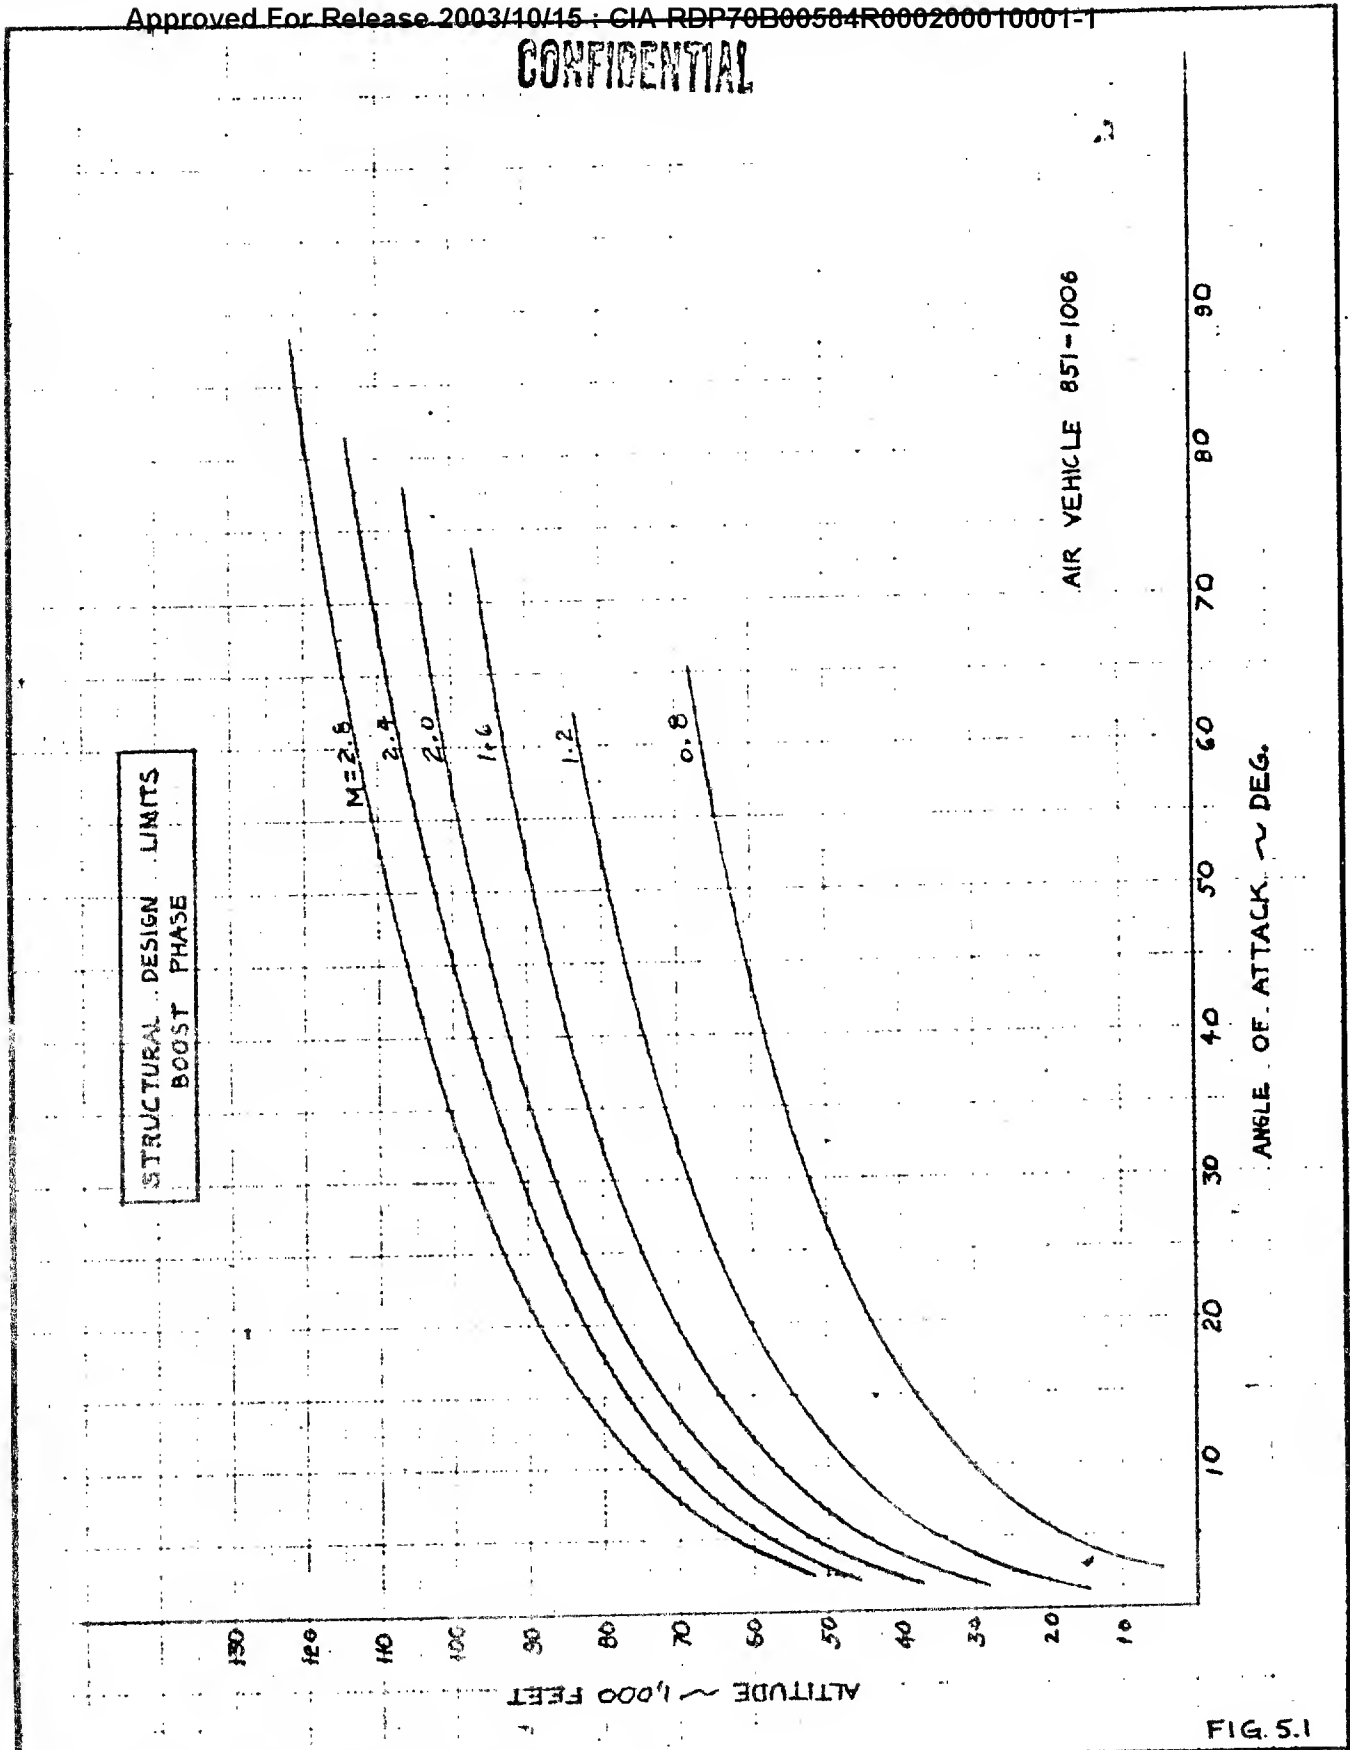


FIG. 5.1

CALC	M.H.		REVISED	DATE	STRUCTURAL DESIGN LIMITS BOOST PHASE	844-2050D
CHECK	2-8-58	12-56		12-58		02-80065
APR					THE BOEING COMPANY	PAGE
APR						54
Approved For Release 2003/10/15 : CIA-RDP70B00584R000200010001-1						

43

CONFIDENTIAL

CONFIDENTIAL

BASIC GLIDER
ALTITUDE LIMITS
RE-ENTRY

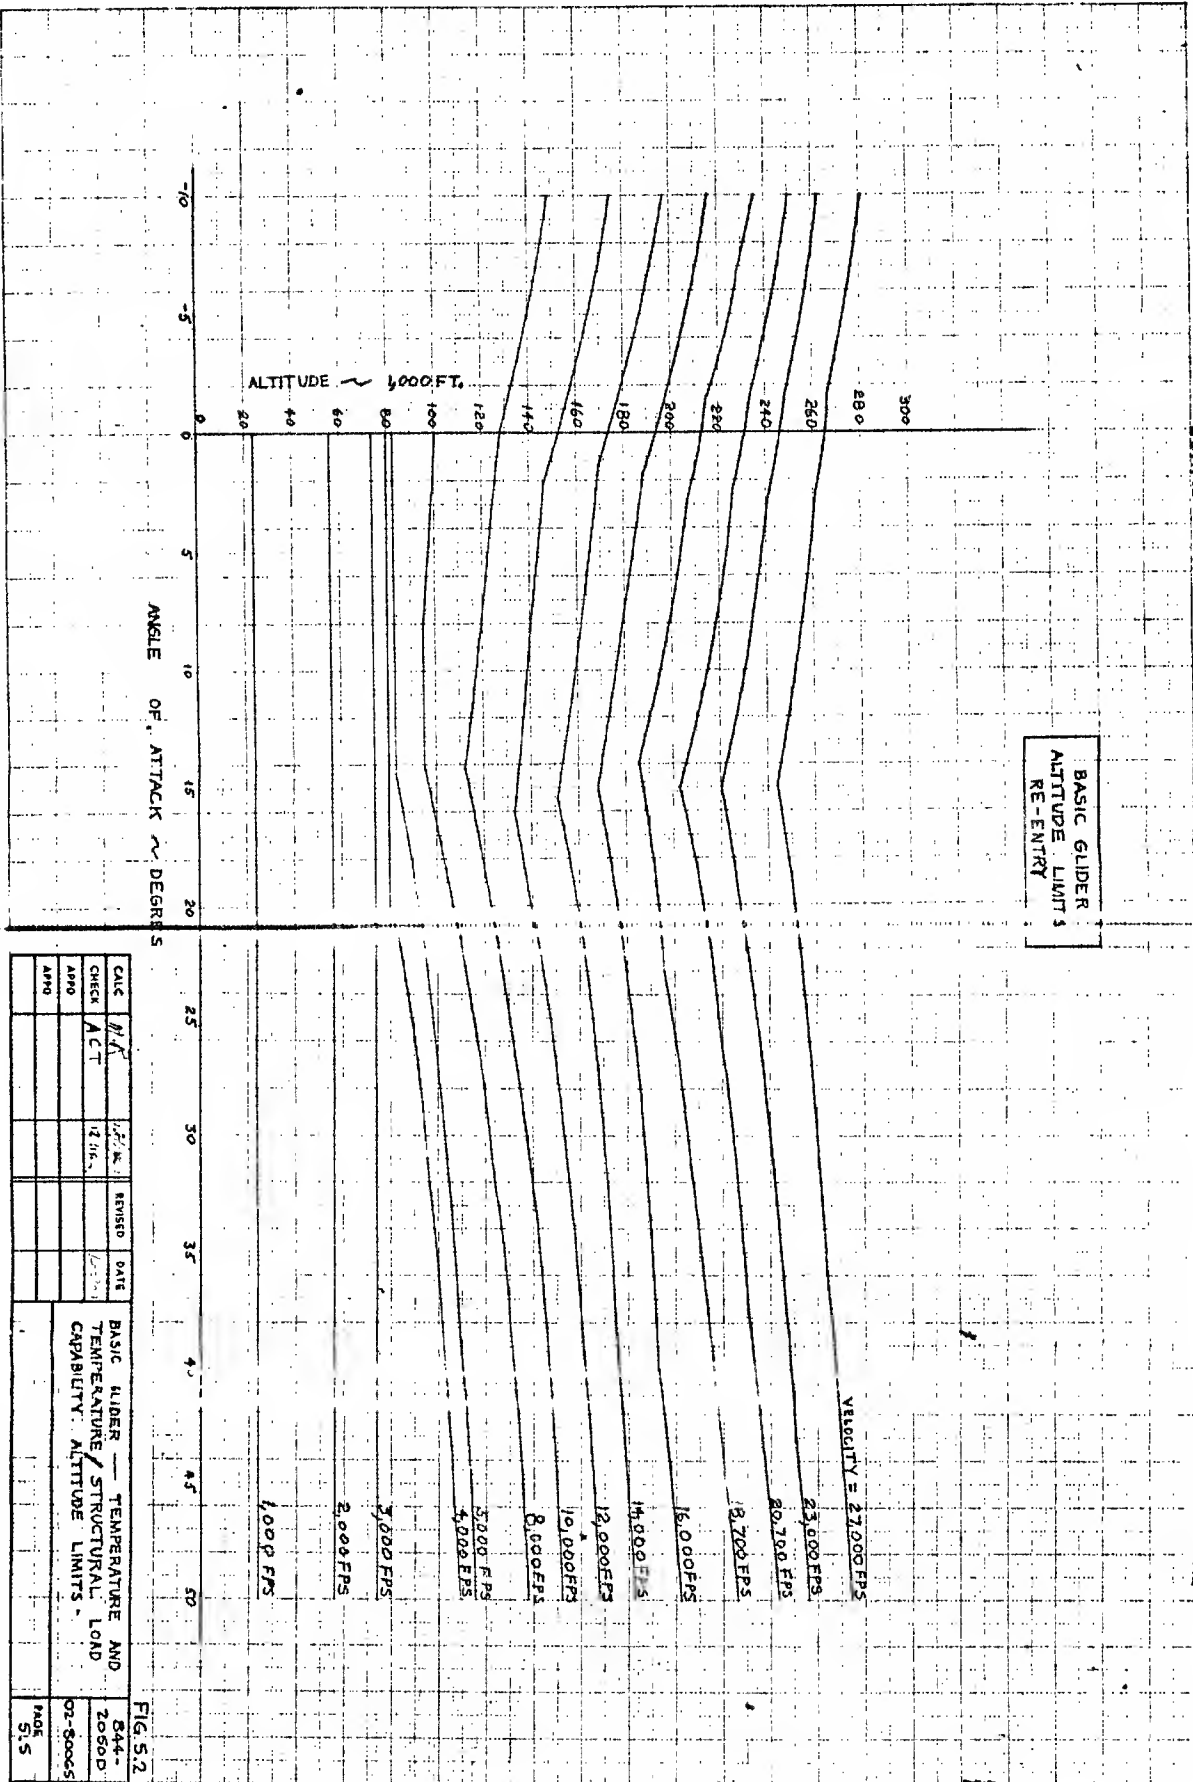


FIG. 5.2

CALC	W/F	REVISED	DATE	BASIC GLIDER — TEMPERATURE AND	844-
CHECK	ACT	12/16		STRUCTURAL LOAD	10500
APPRO				CAPABILITY: ALTITUDE LIMITS -	02-80065
					315

CONFIDENTIAL

CONFIDENTIAL

US 4041 7000

ME 844-10500

CONFIDENTIAL

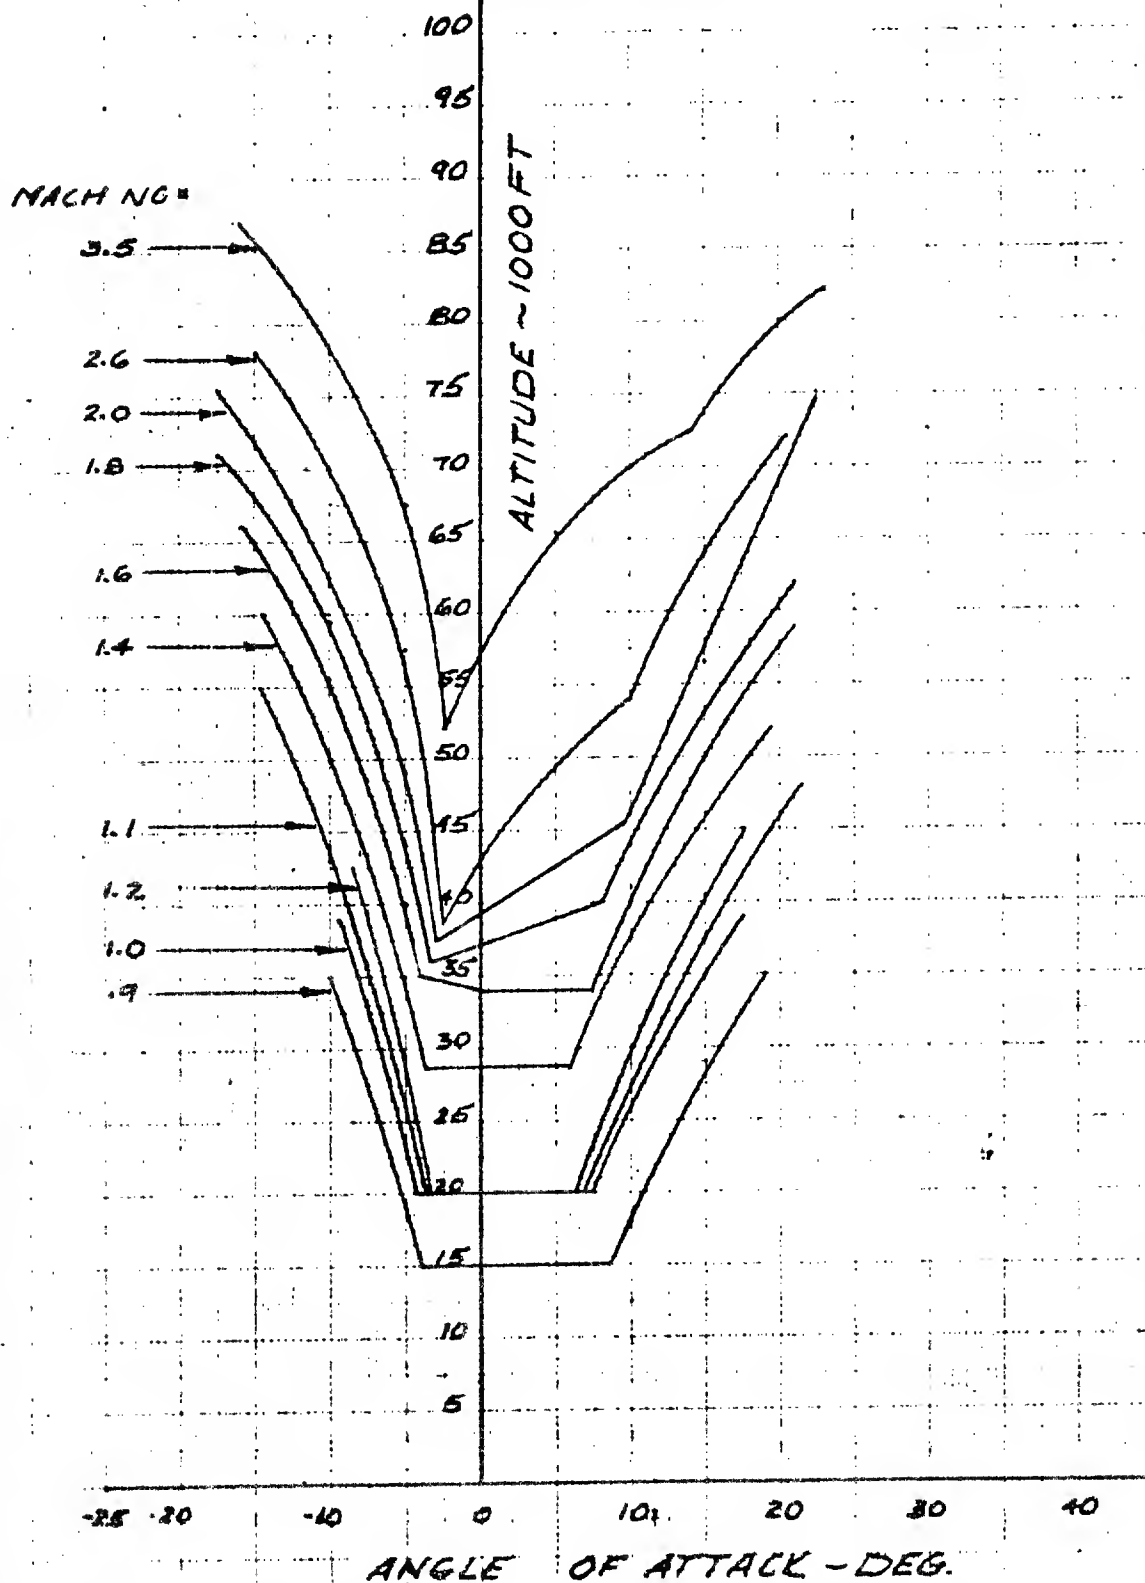


FIG. 5.3


CALC	DE. BENNETT	12-15-61	REVISED	DATE	STRUCTURAL LIMIT LINES-GLIDER PLUS TRANSITION SECTION- ABORT CONDITION THE BOEING COMPANY	844- 2050 D
CHECK				12-20-61		02-80065
APR						PAGE
APR						5.6
Approved For Release 2003/10/15 : CIA-RDP70B00584R000200010001-1						

CONFIDENTIAL

CONFIDENTIAL


THE ALABAMA TOOL 00078
● TOLL-FREE 800-234-2345

5

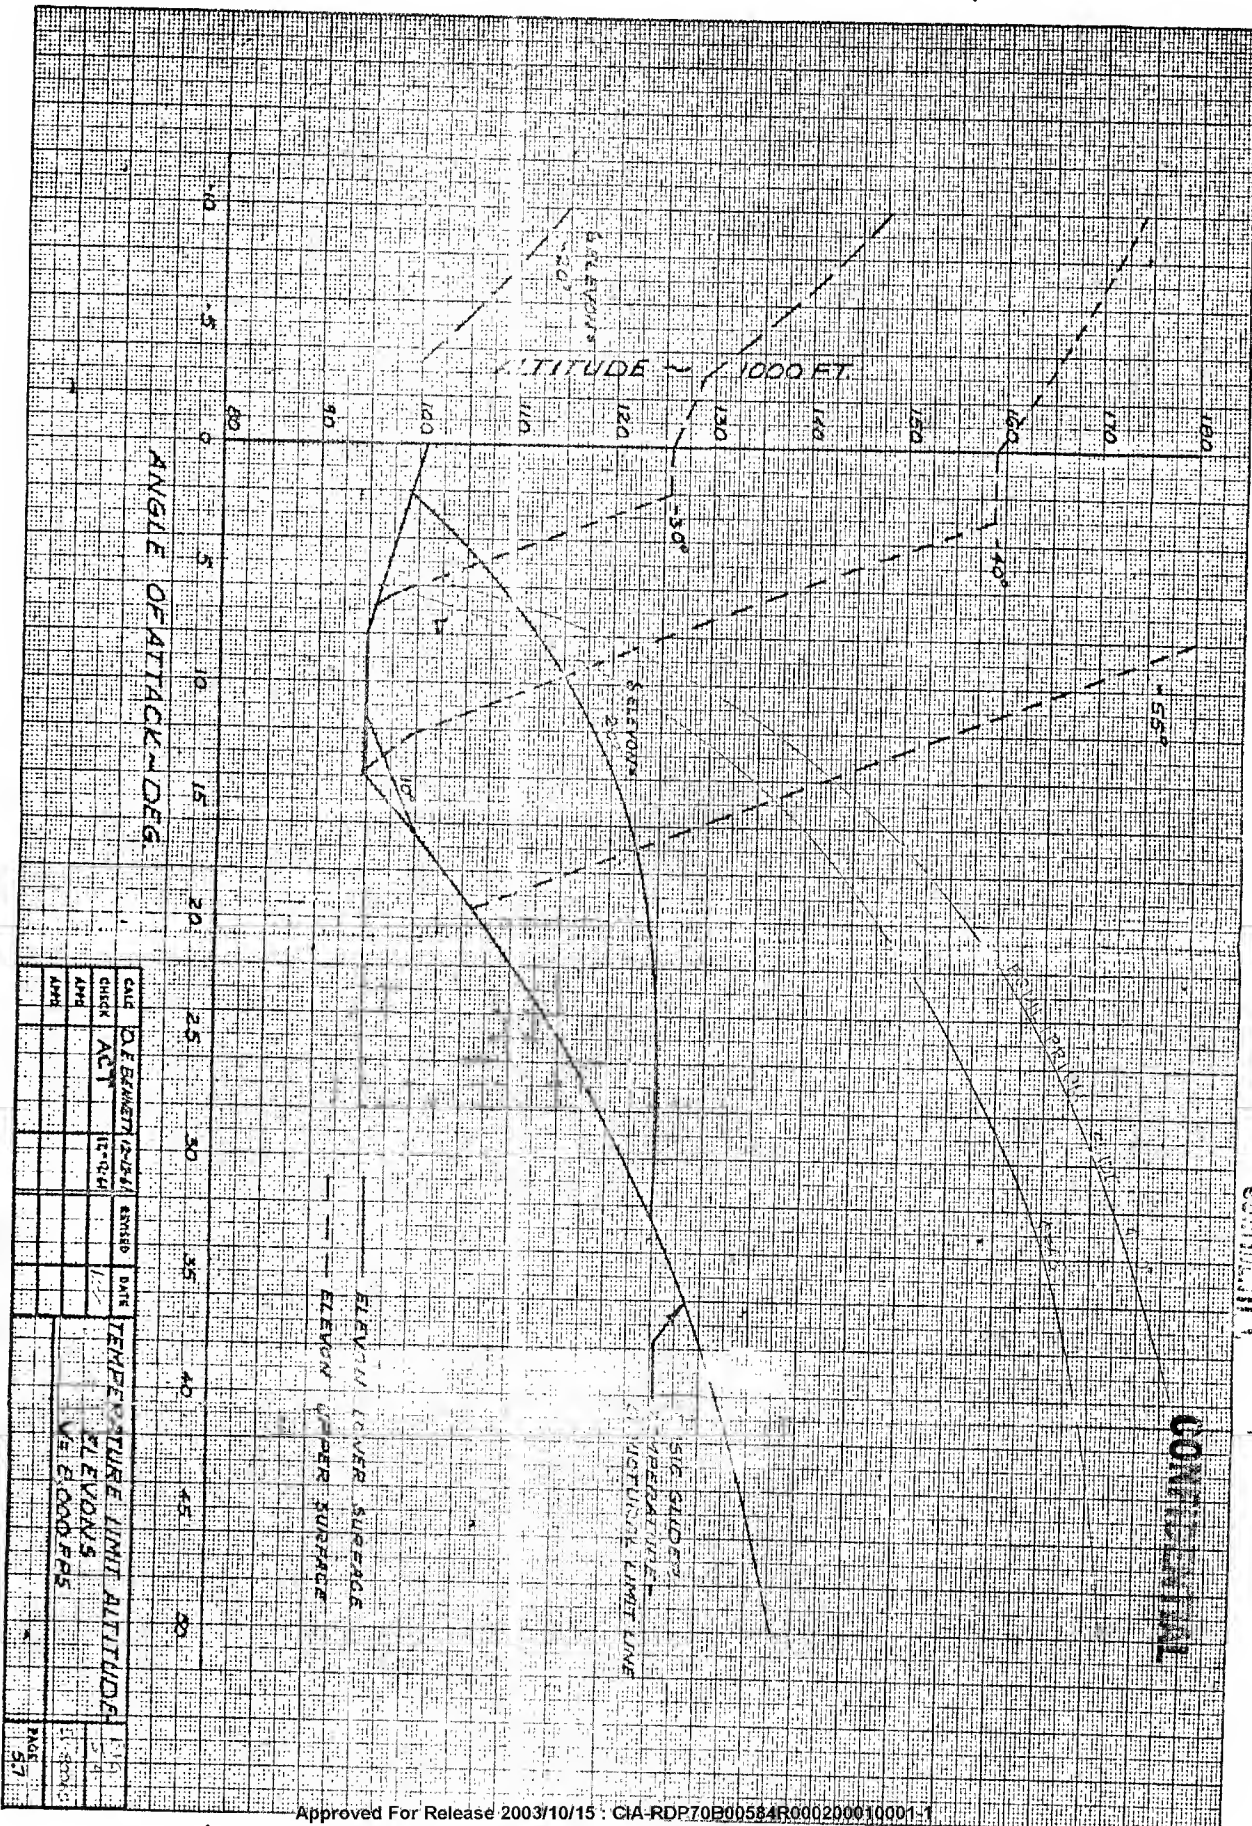

CONFIDENTIAL

CONFIDENTIAL

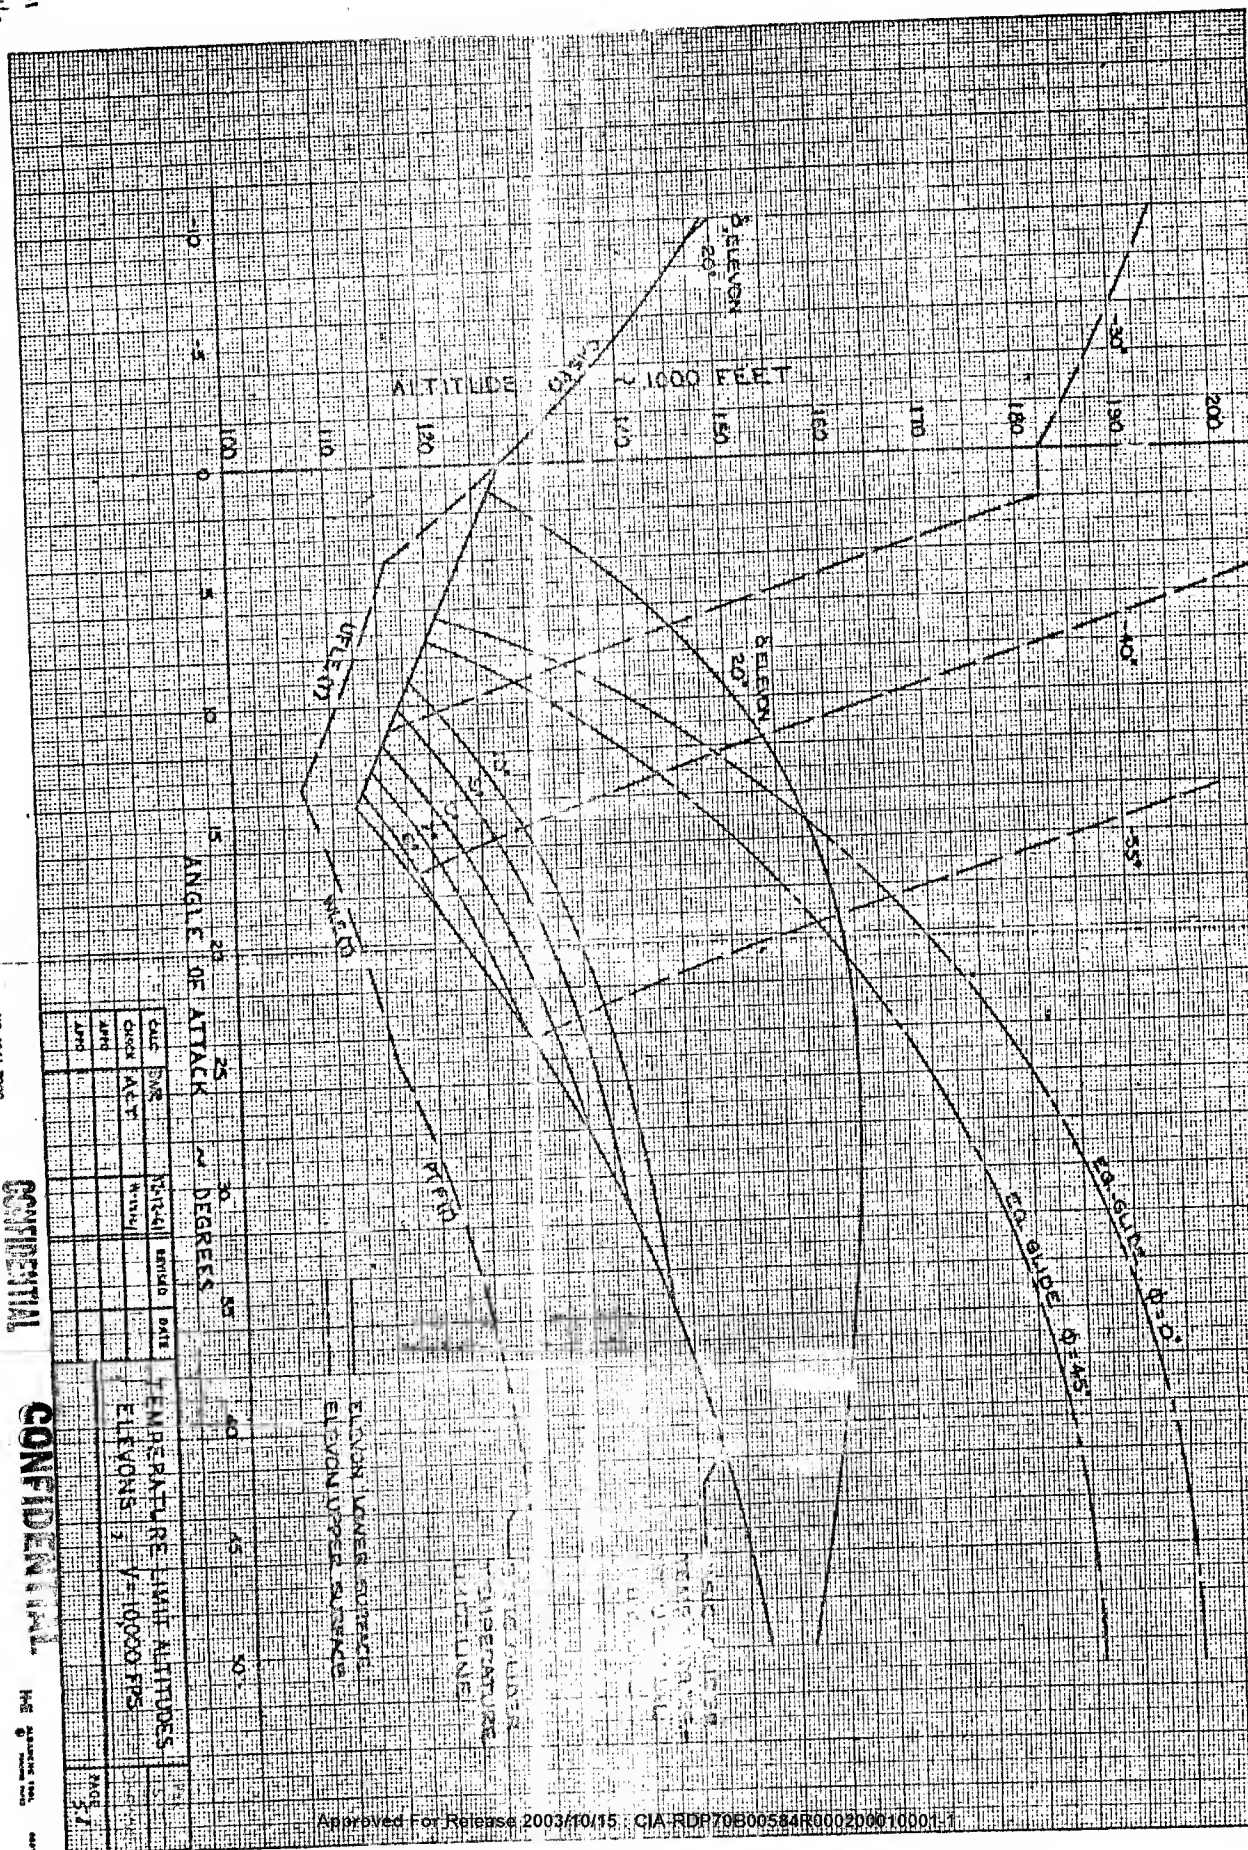


US 4041 7000

CONFIDENTIAL

CONFIDENTIAL


14-00000 100 0000

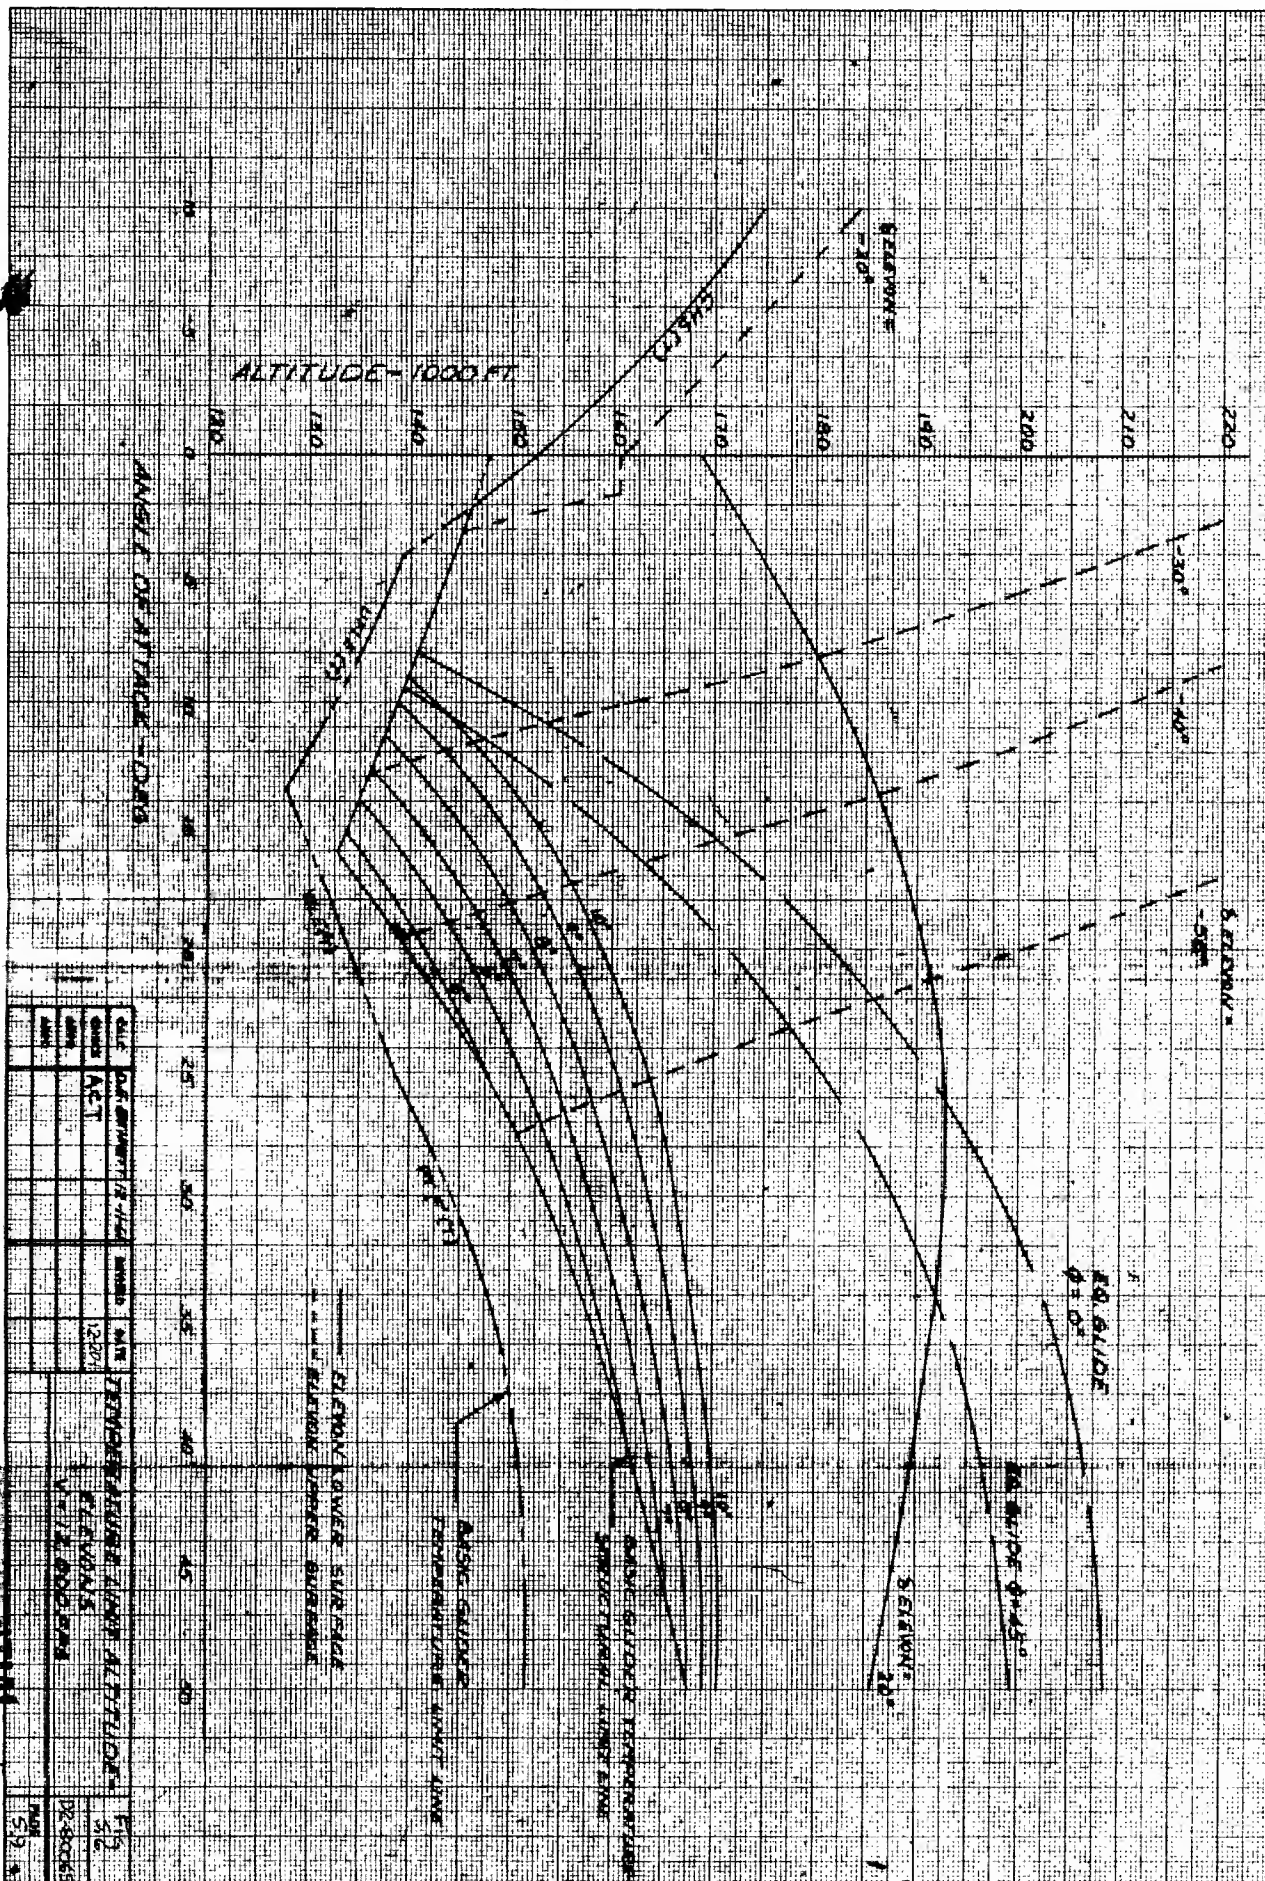


CONFIDENTIAL

CONFIDENTIAL

CONFIDENTIAL

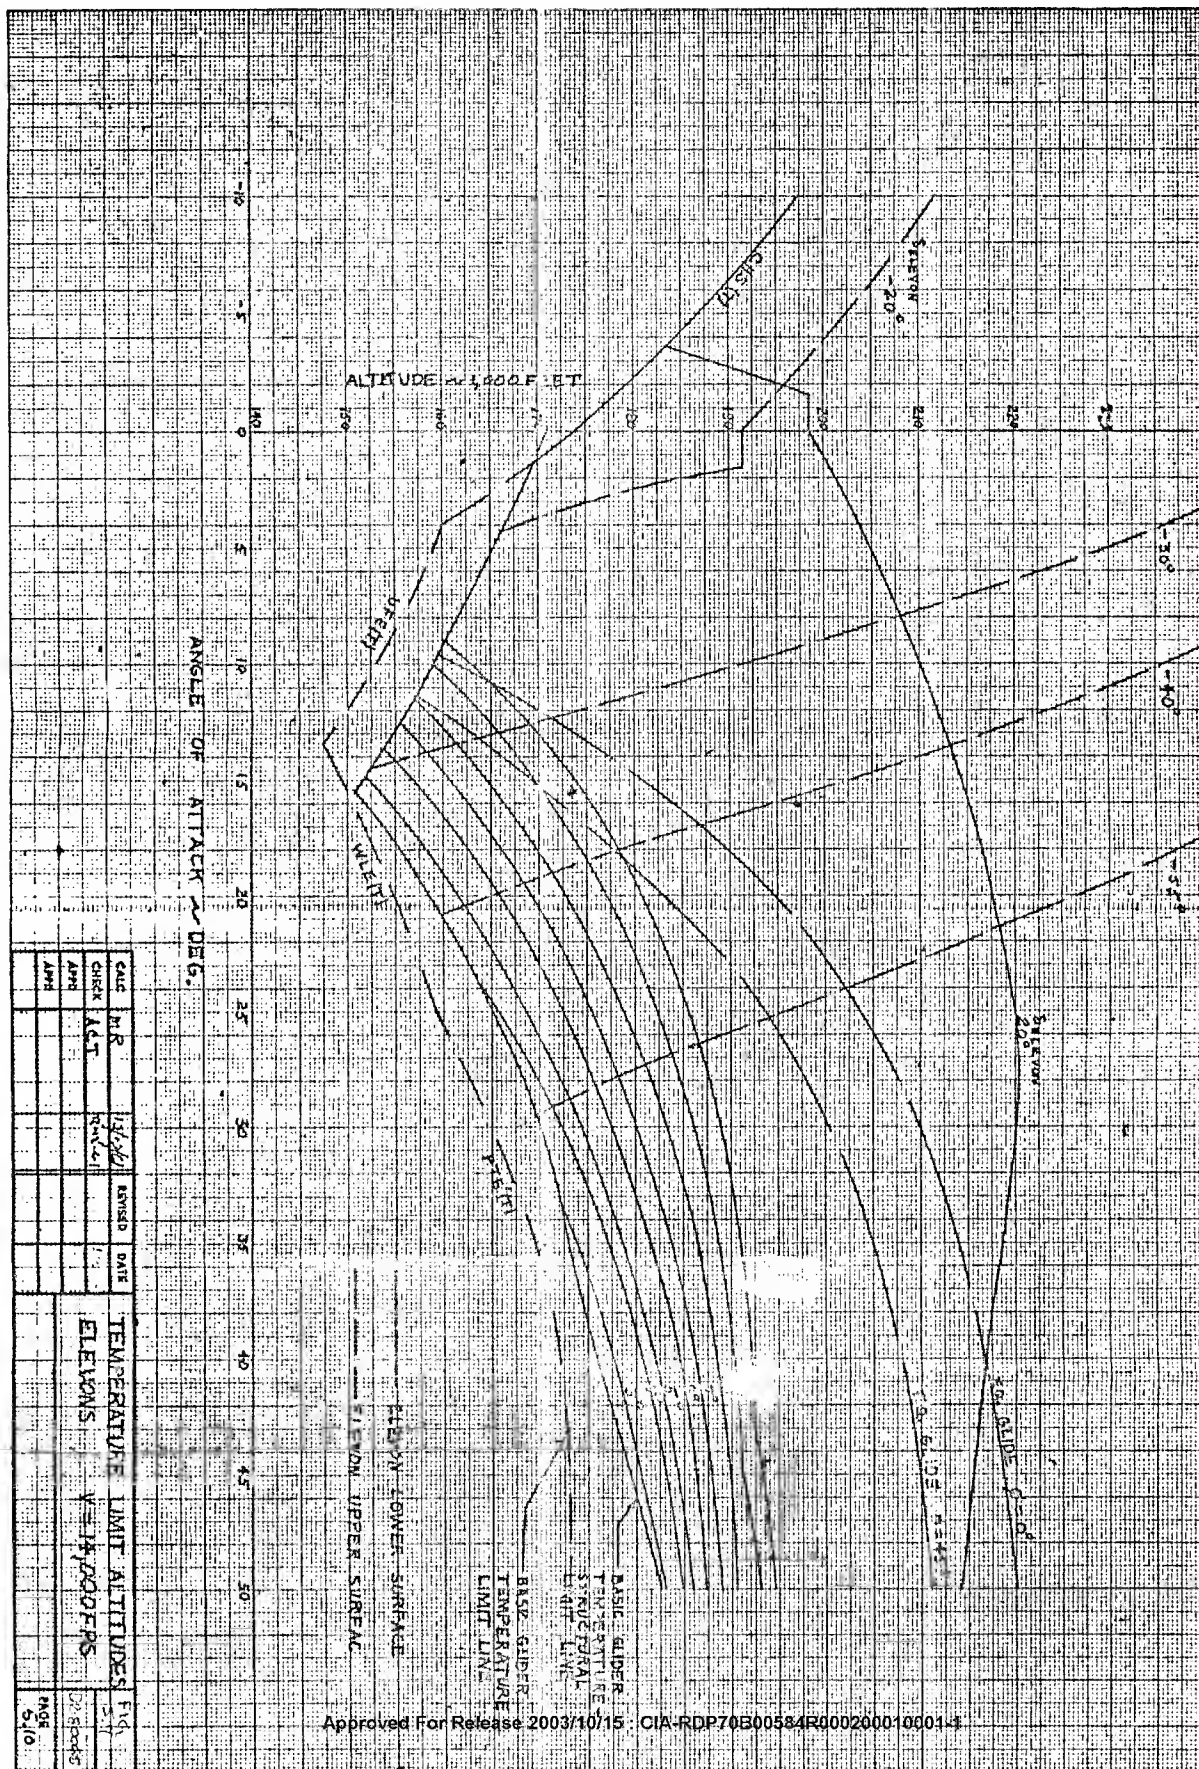

5-47
5-48
5-49

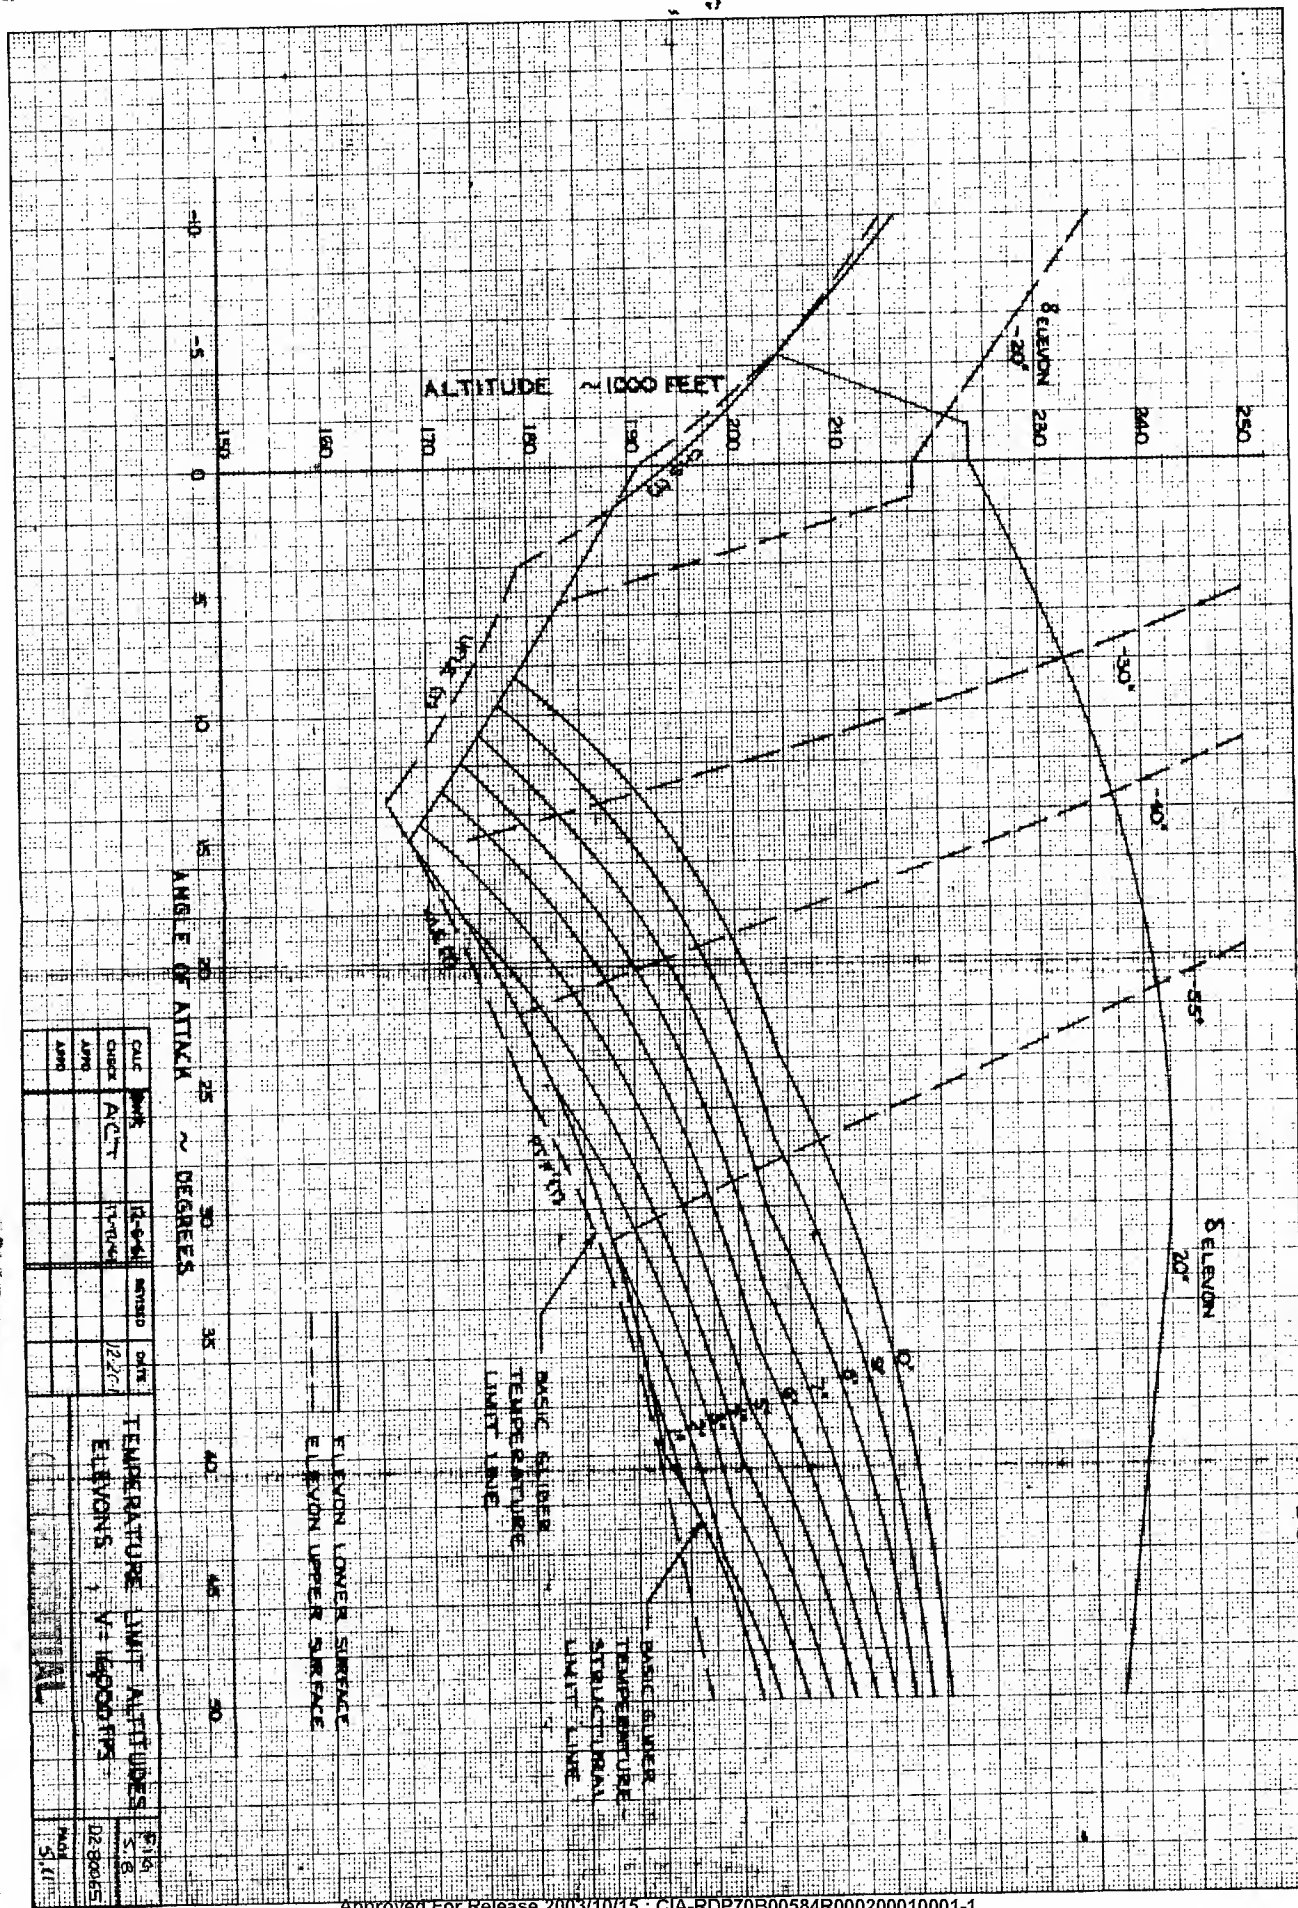


CONFIDENTIAL - CONFIDENTIAL CONFIDENTIAL

US 4041 7000


CONFIDENTIAL

ME 0 1000000 0000

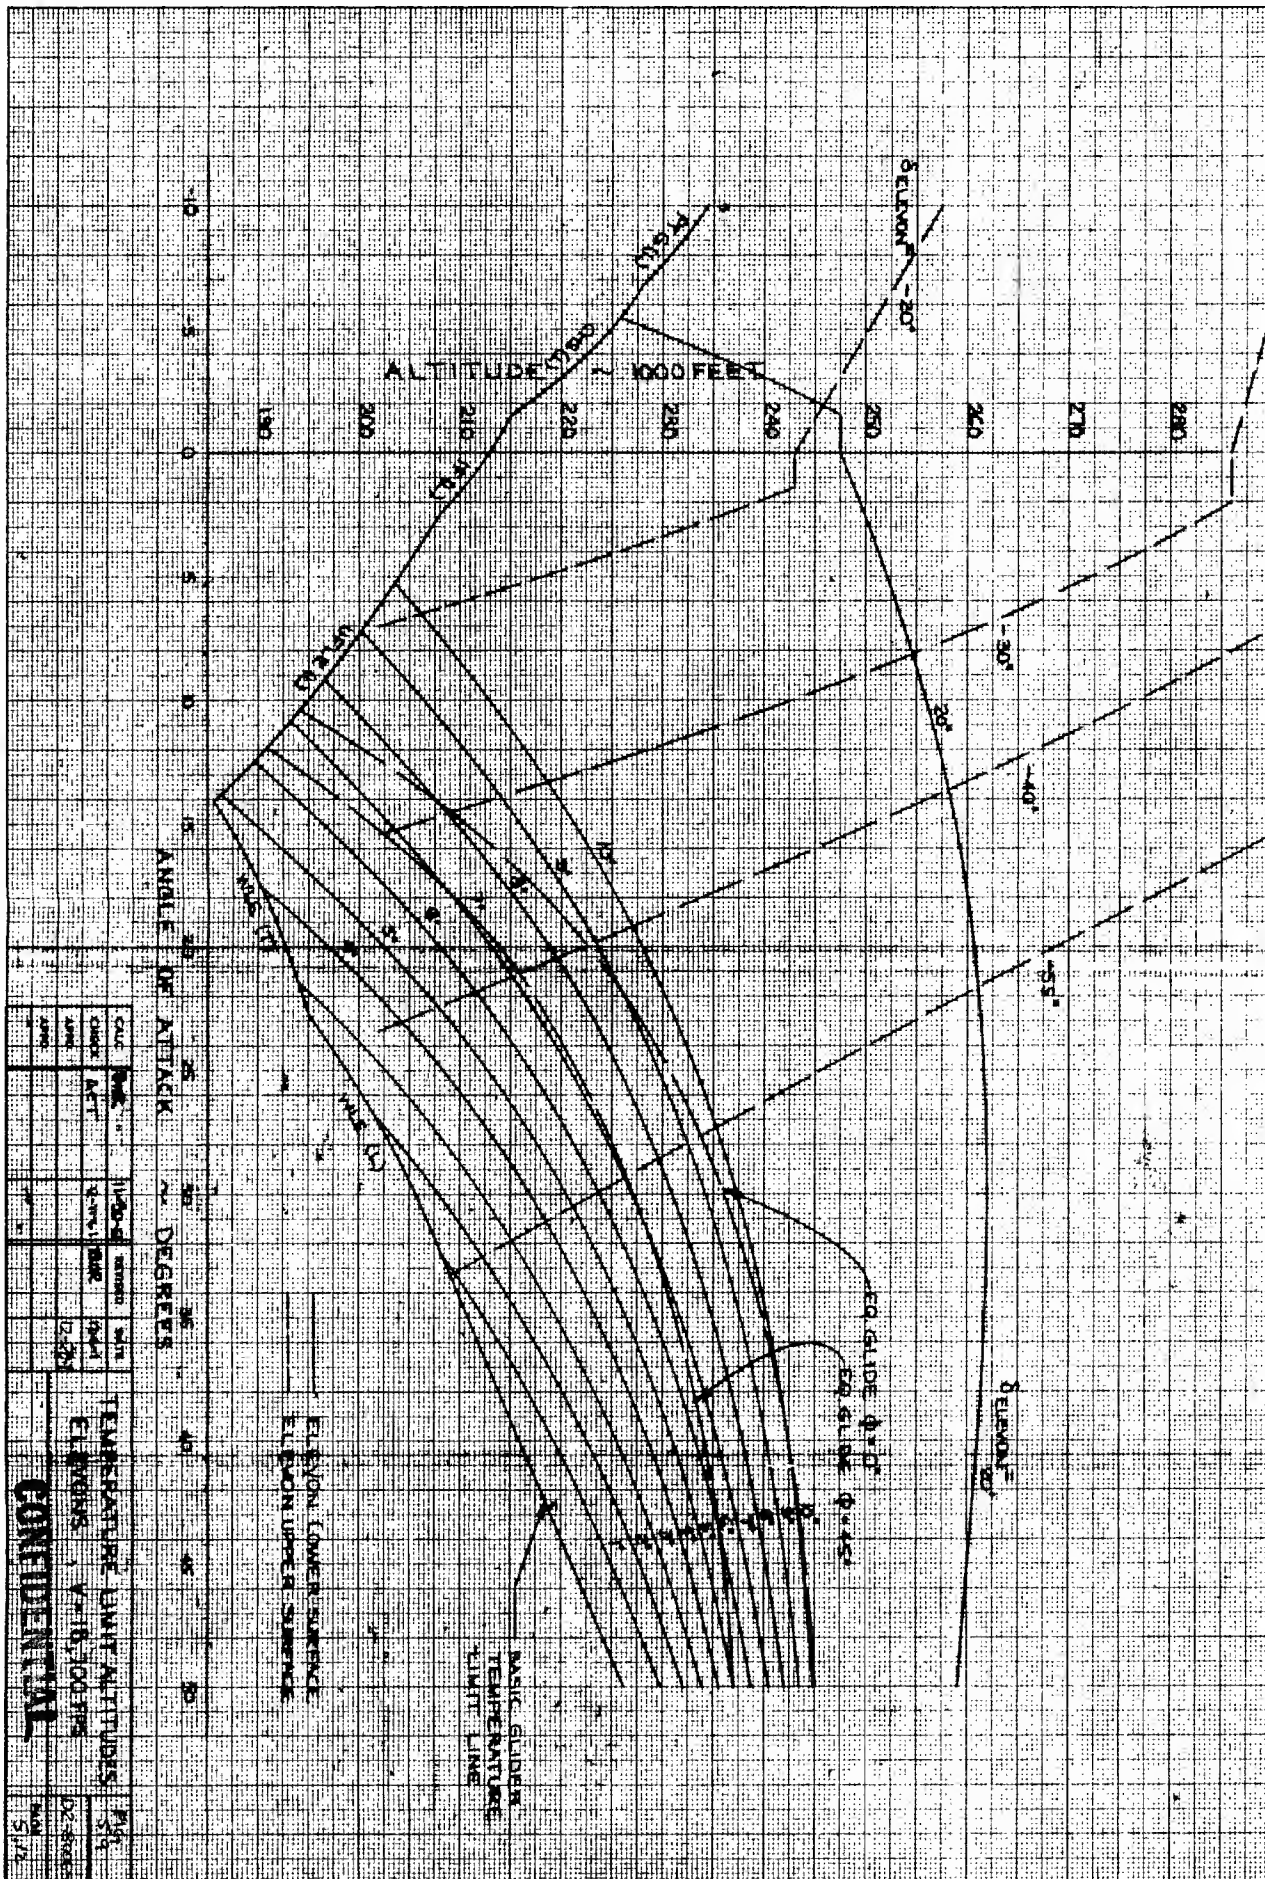

CONFIDENTIAL

CONFIDENTIAL

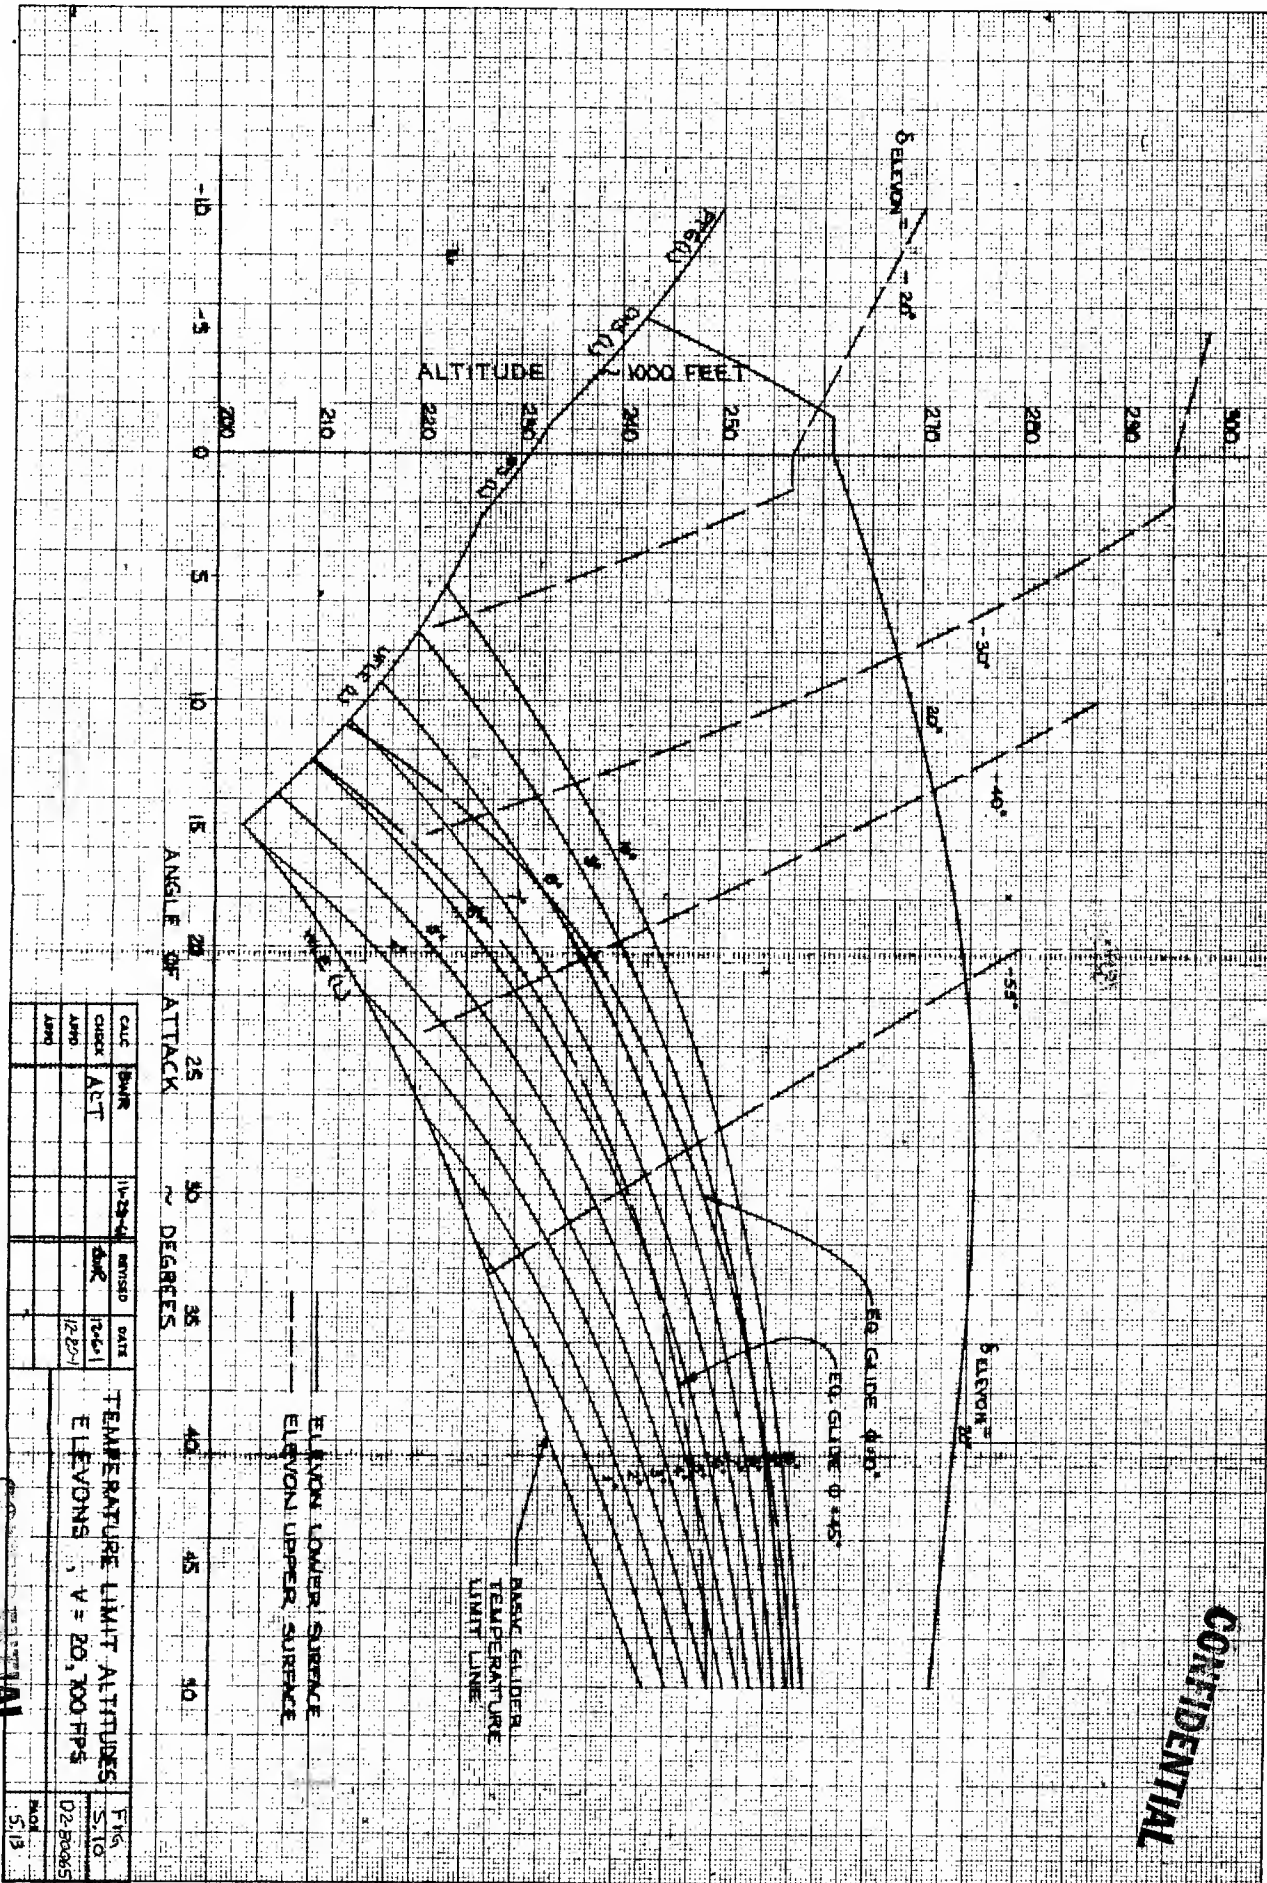


CONFIDENTIAL

CONFIDENTIAL


CONFIDENTIAL

CONFIDENTIAL

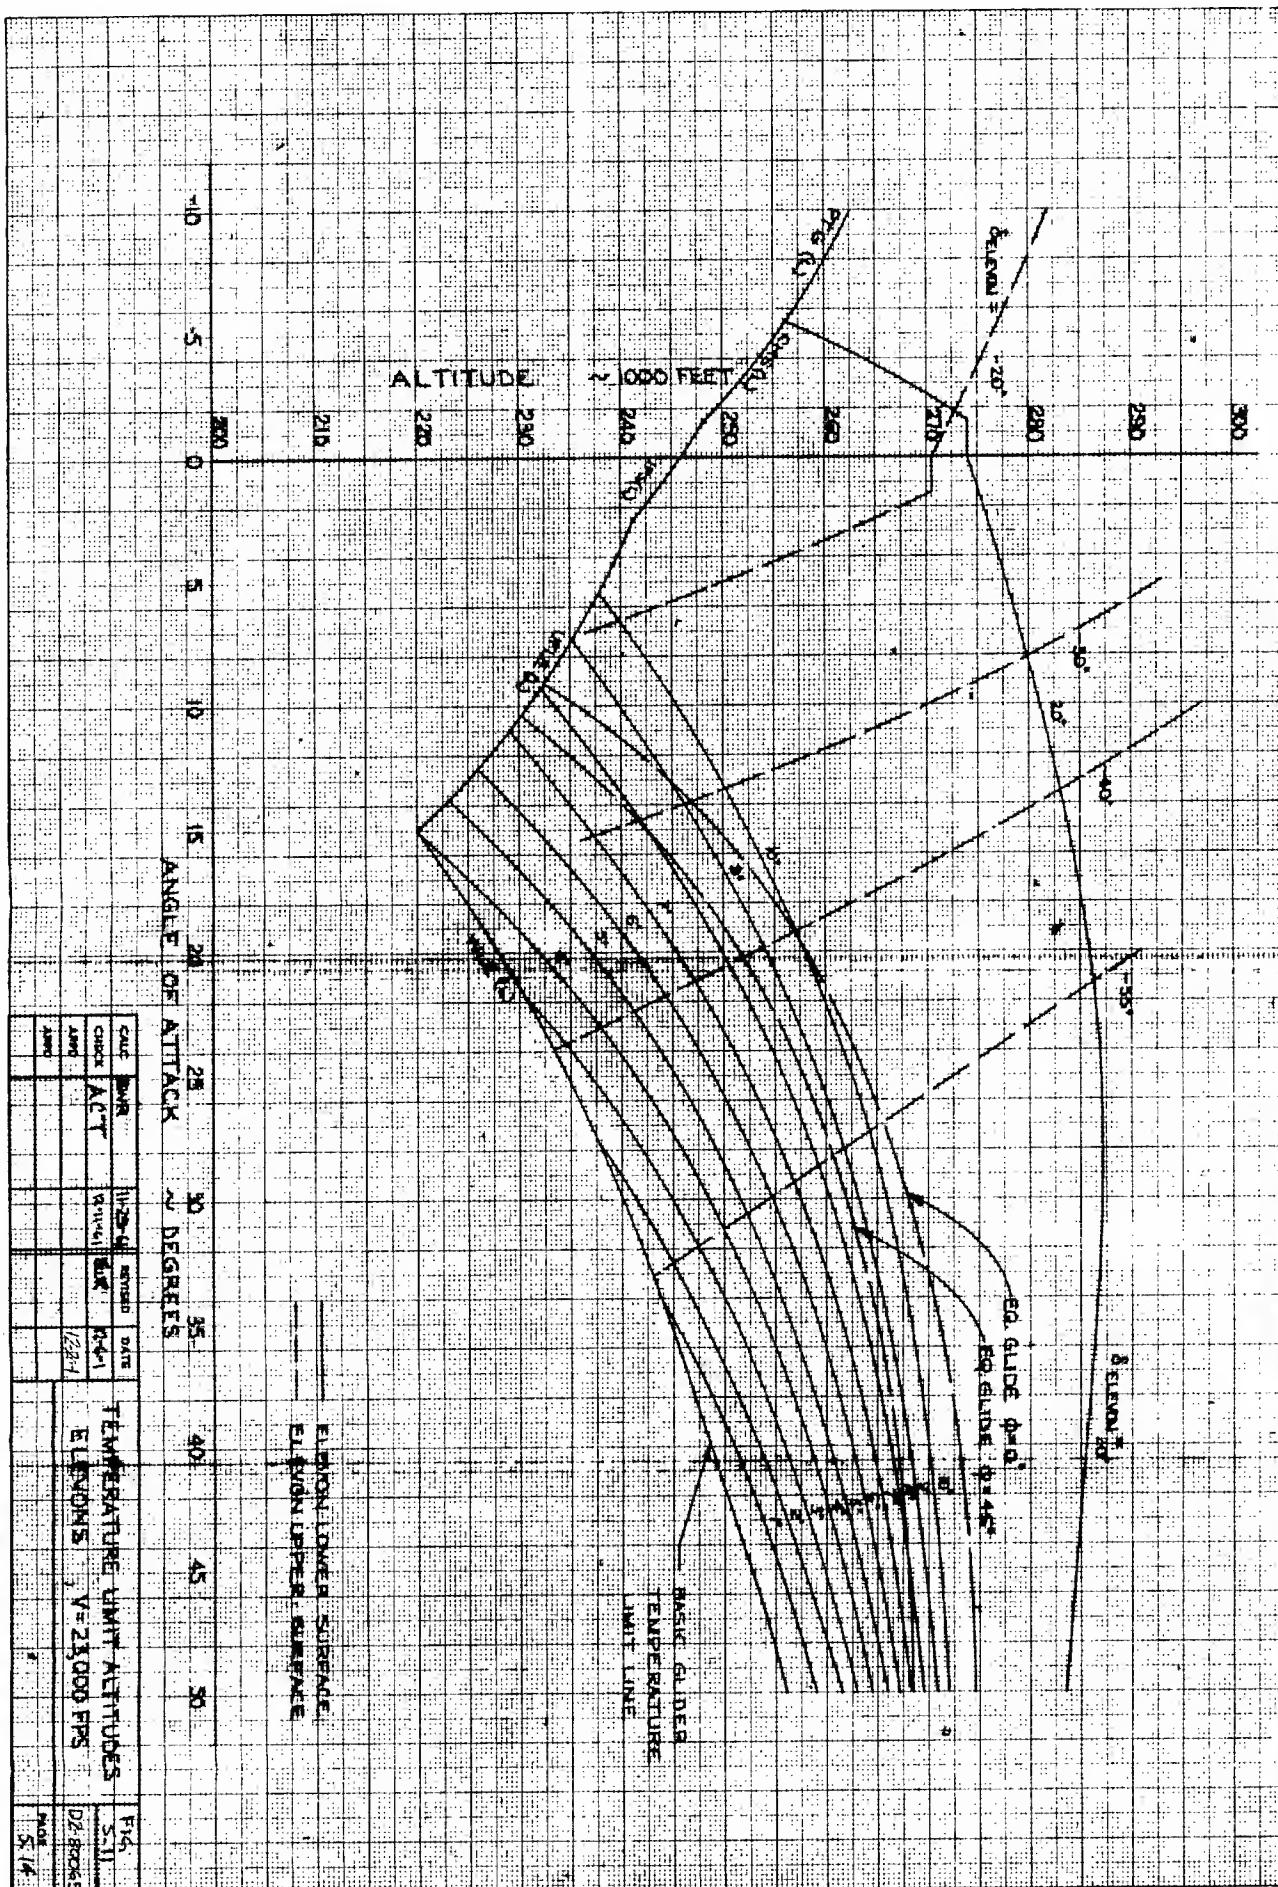


CONFIDENTIAL



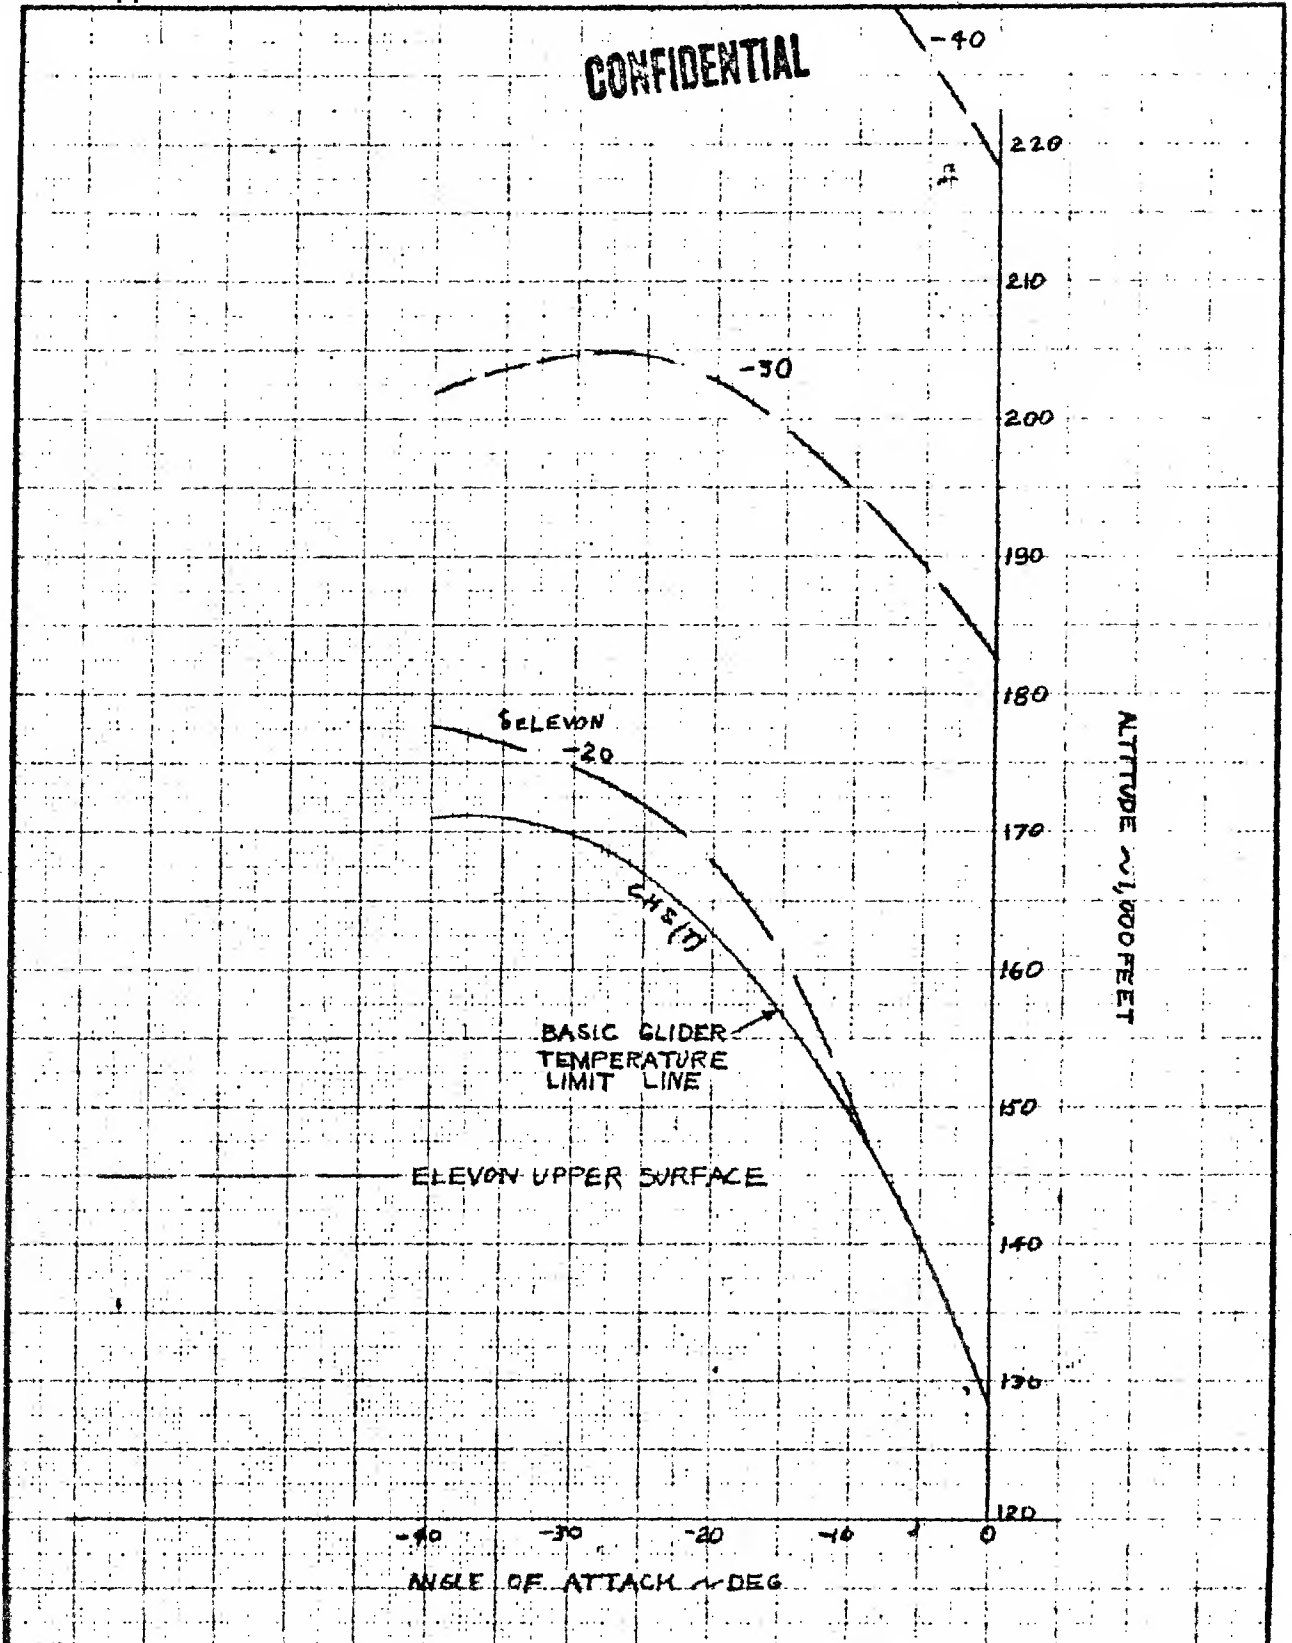

CALC	MB ²	12/13/64	REVISED	DATE	TEMPERATURE LIMIT ALTITUDES ELEVONS , V=10,000 FPS	FIG 5.13
CHECK	DSM	12-3-64	12-3-64			D2-80065
APR					THE BOEING COMPANY	PAGE 5.16
APR						

CONFIDENTIAL

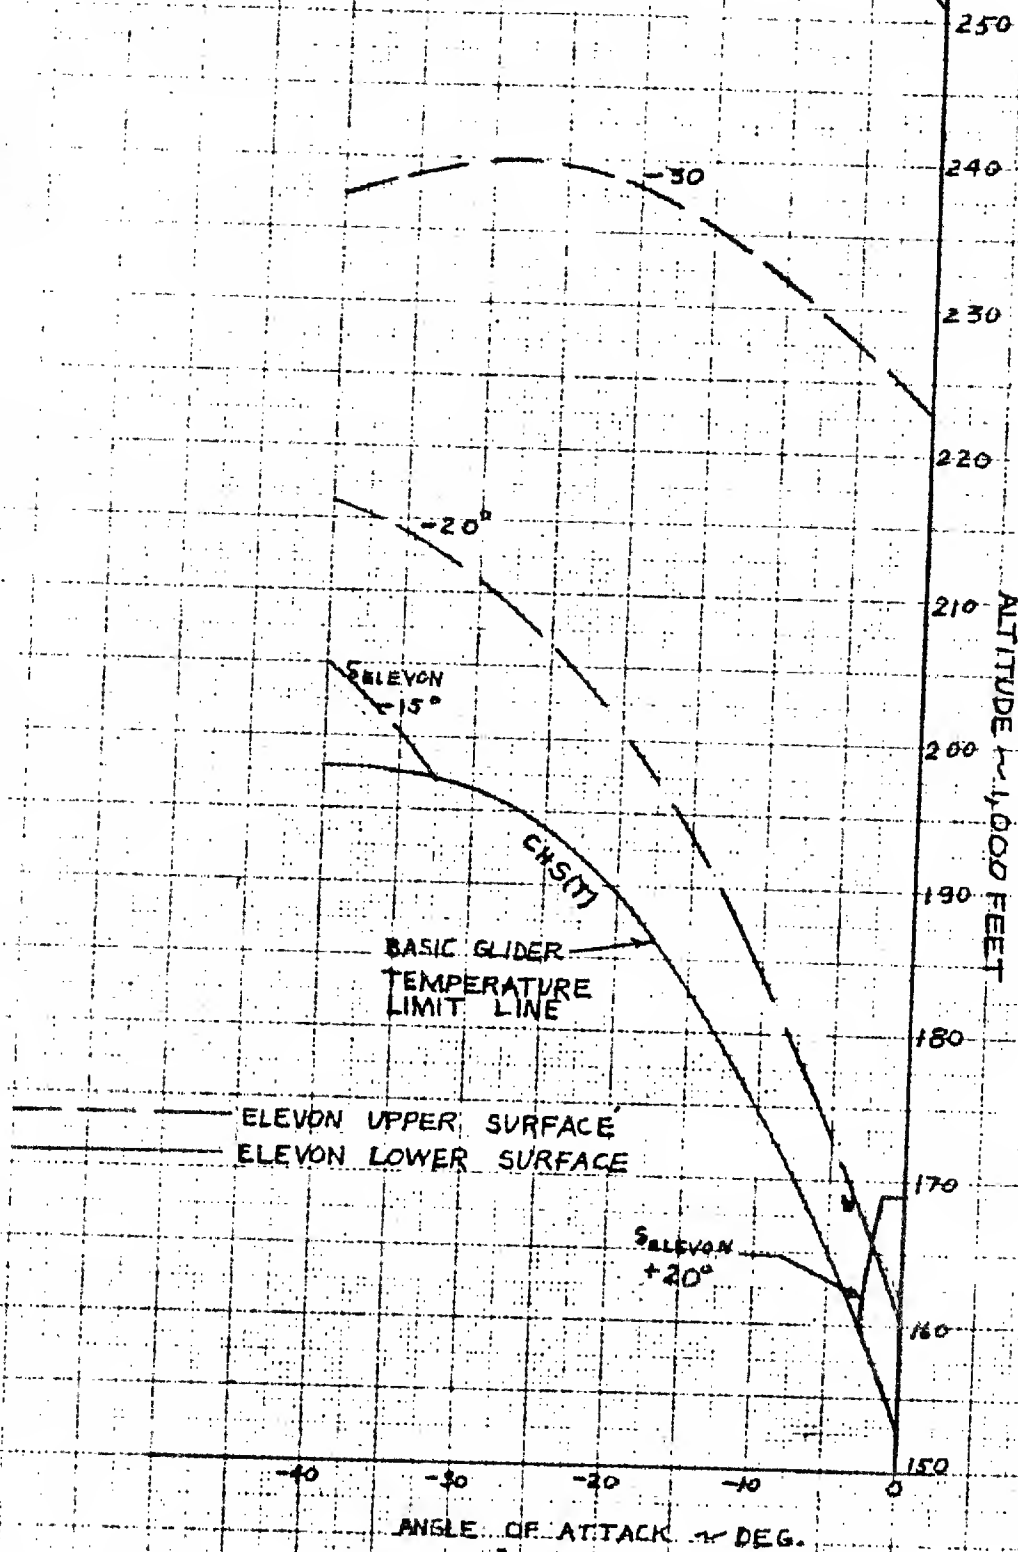

CALC	11/1	12-2-1	REVISED	DATE
CHECK	12-2-1	12-2-1		
APR				
APR				

TEMPERATURE LIMIT ALTITUDE
ELEVONS , V=12,000FPS

FIG
5.14


D2-80065

THE BOEING COMPANY

PAGE
5.17

CONFIDENTIAL

CONFIDENTIAL

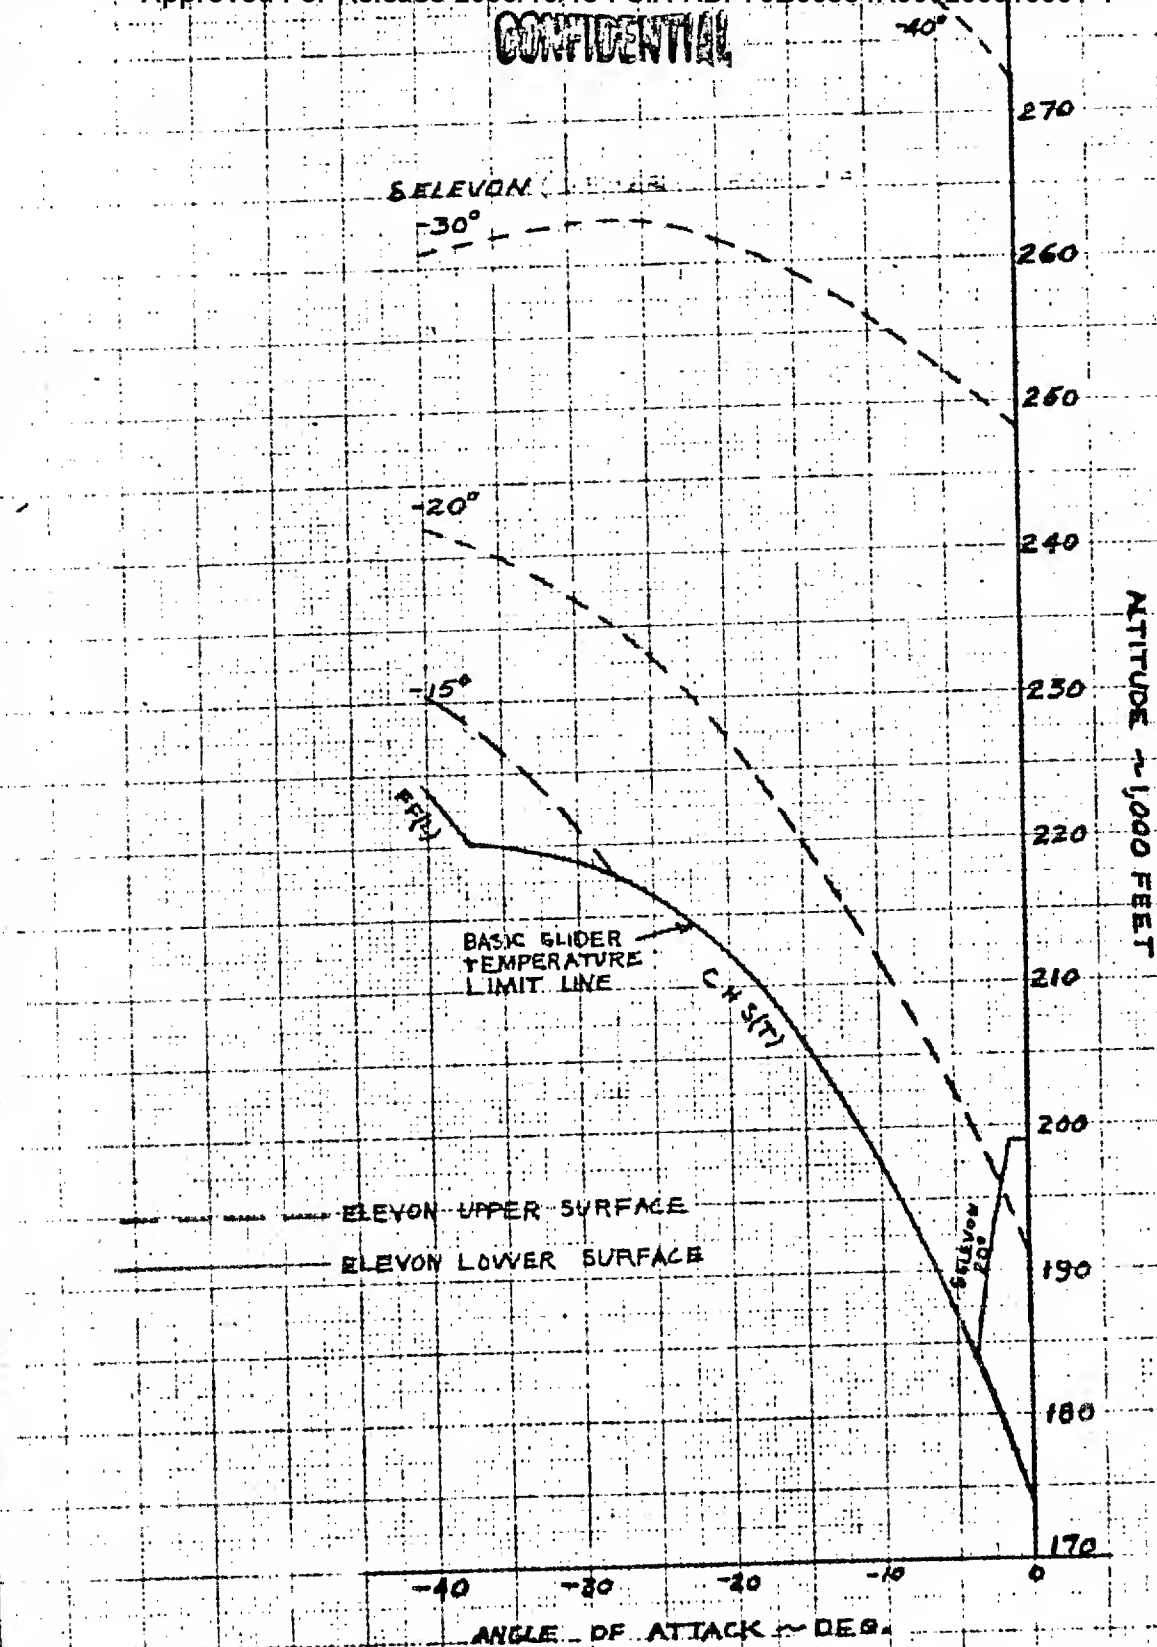

CALC	M.H.	12/12/61	REVISED	DATE
CHECK	D.E.B.	12/13/61	12/20/61	
APR				
APR				


TEMPERATURE LIMIT ALTITUDE
ELEVONS V=14,000 FPS

THE BOEING COMPANY

Fig
5.15
D2-80065
PAGE
5.18


CONFIDENTIAL

CONFIDENTIAL

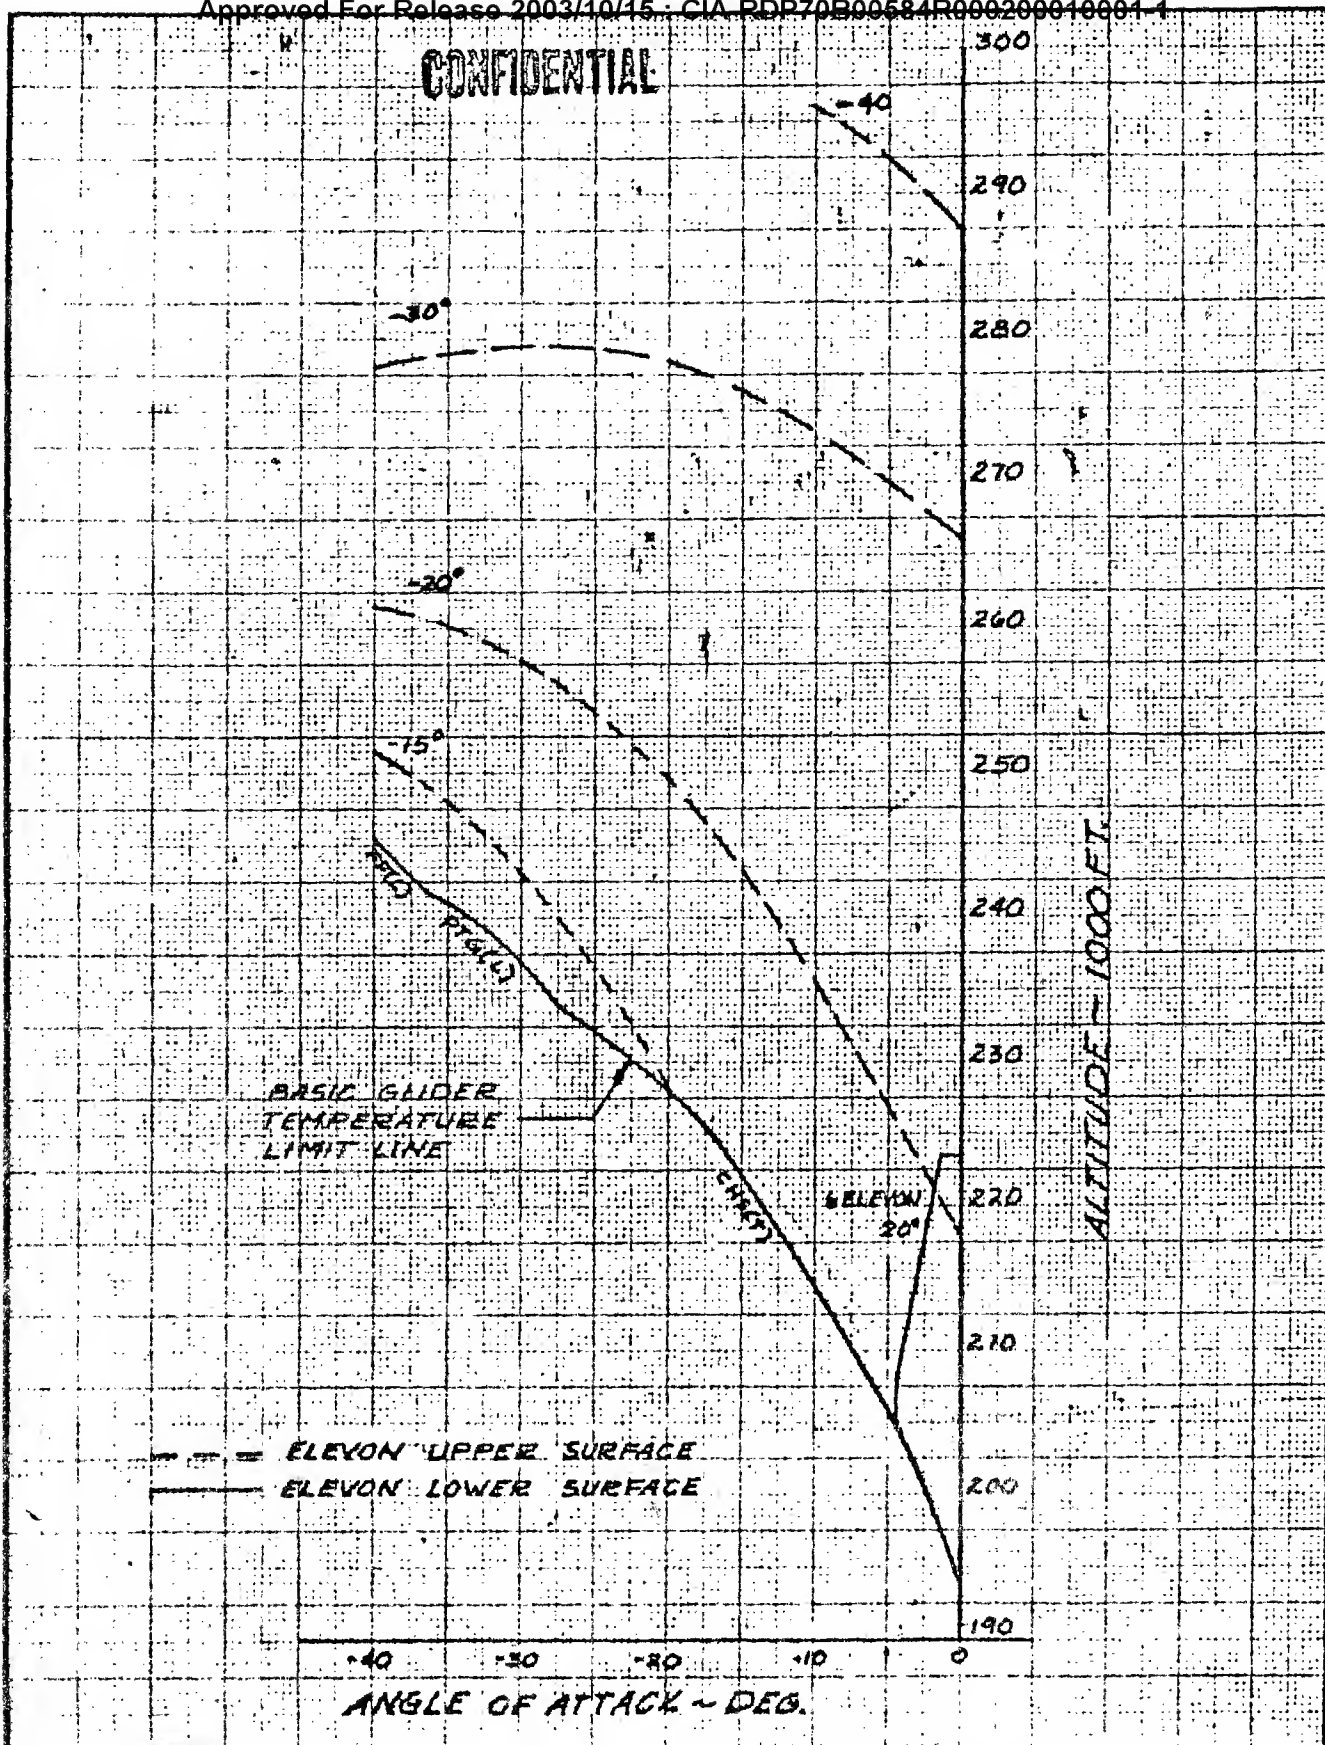

CALC	D.E. BENNETT	12-12-61	REVISED	DATE	TEMPERATURE LIMIT ALTITUDE ELEVONS - V=16,000 FPS	FIG S.16
CHECK	P. J.					D2-80365
APR						PAGE 5.19
APR						
THE BOEING COMPANY						


CONFIDENTIAL

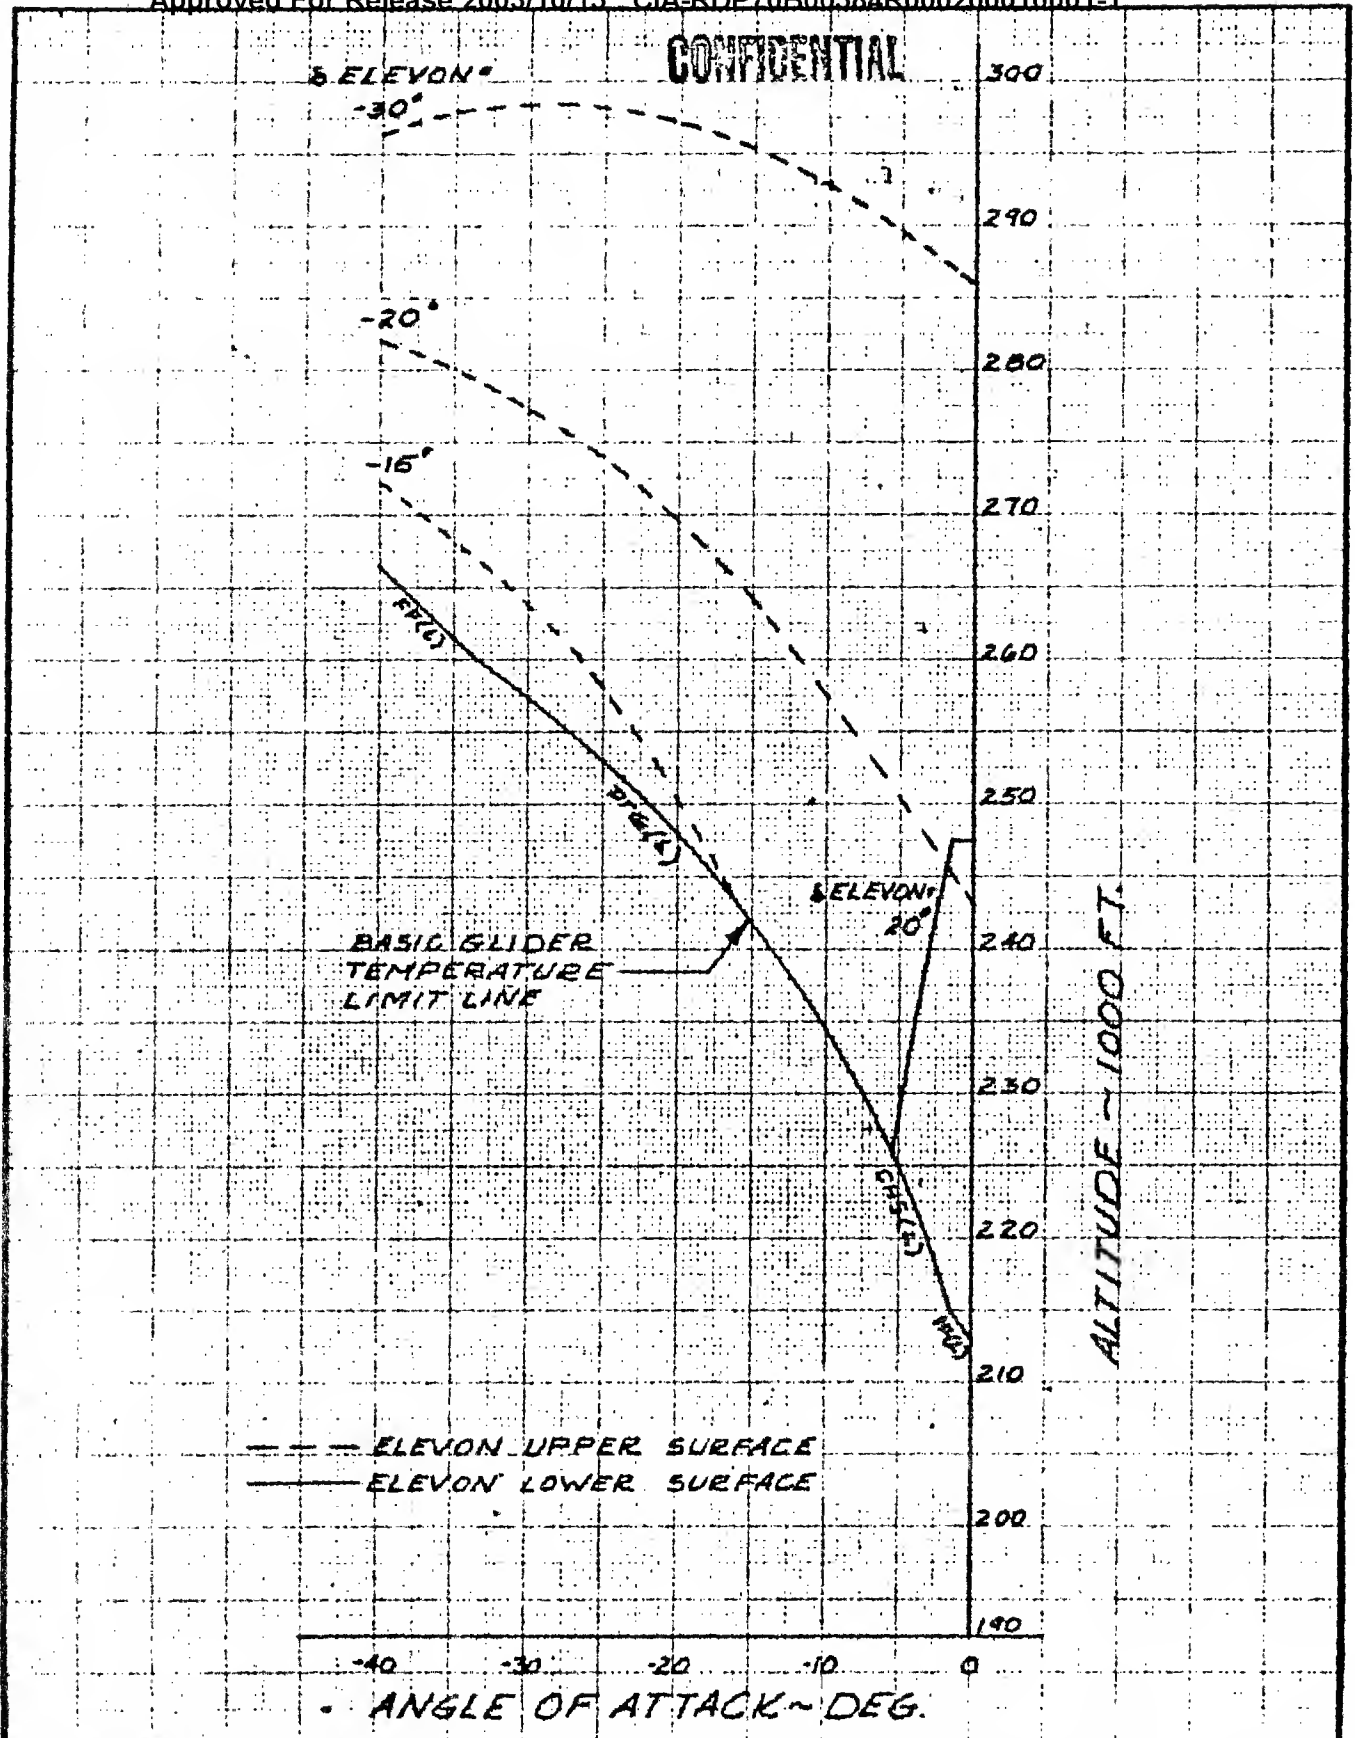

CALC	D.E. BENNETT	12-13-61	REVISED	DATE	TEMPERATURE LIMIT ALTITUDE ELEVONS - V=18,700 FPS	FIG 5.17
CHECK	ACT	12-3-61				02-80065
APR						PAGE 5.20
APR						
THE BOEING COMPANY						

CONFIDENTIAL

CONFIDENTIAL

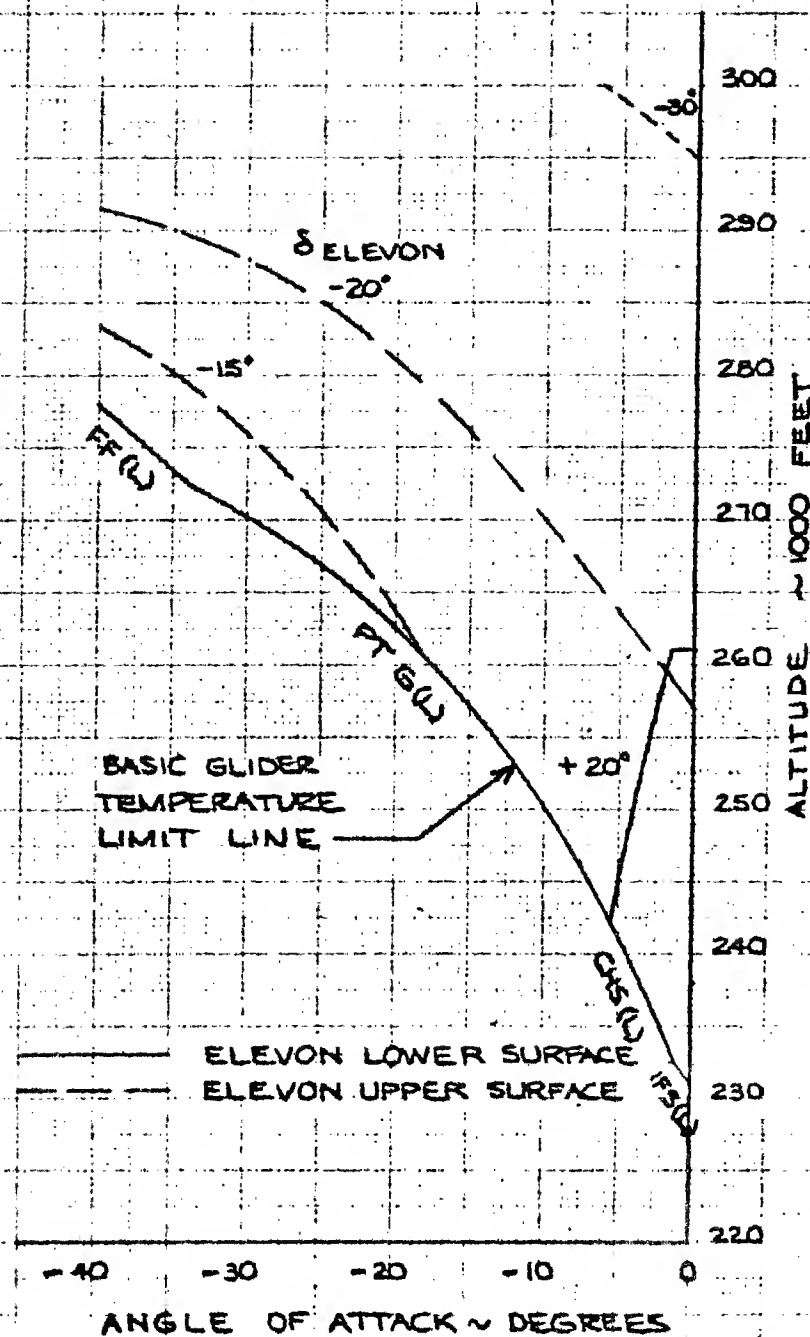


CALC	BNR	12-13-61	REVISED	DATE	TEMPERATURE LIMIT ALTITUDE ELEVONS , V=20,700	FIG S.18
CHECK	A.T	12-13-61				D2-80065
APR						PAGE S.21
APR						

CONFIDENTIAL

THE BOEING COMPANY

CONFIDENTIAL

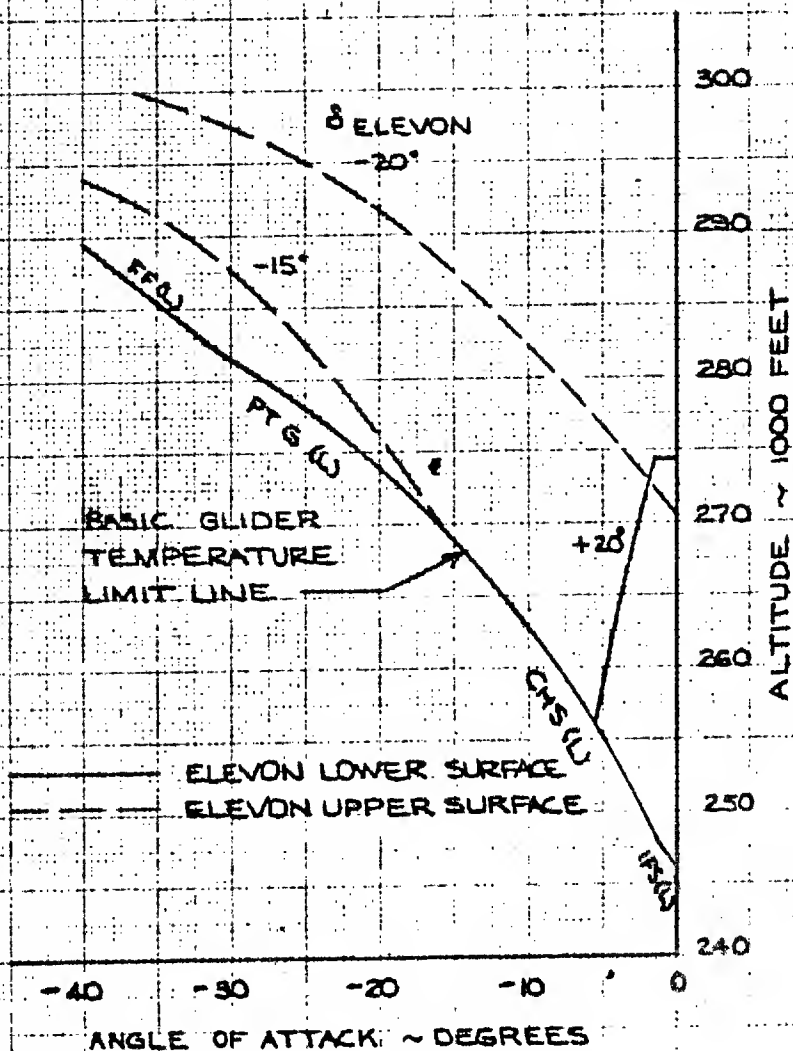

CALC	BWR	12-12-61	REVISED	DATE
CHECK	ACT	12-15-61	12-22-61	
APR				
APR				


TEMPERATURE LIMIT ALTITUDE
ELEVONS , V = 23000 FPS

THE BOEING COMPANY

FIG
S.19
D2-80065
PAGE
5.22

CONFIDENTIAL

CONFIDENTIAL

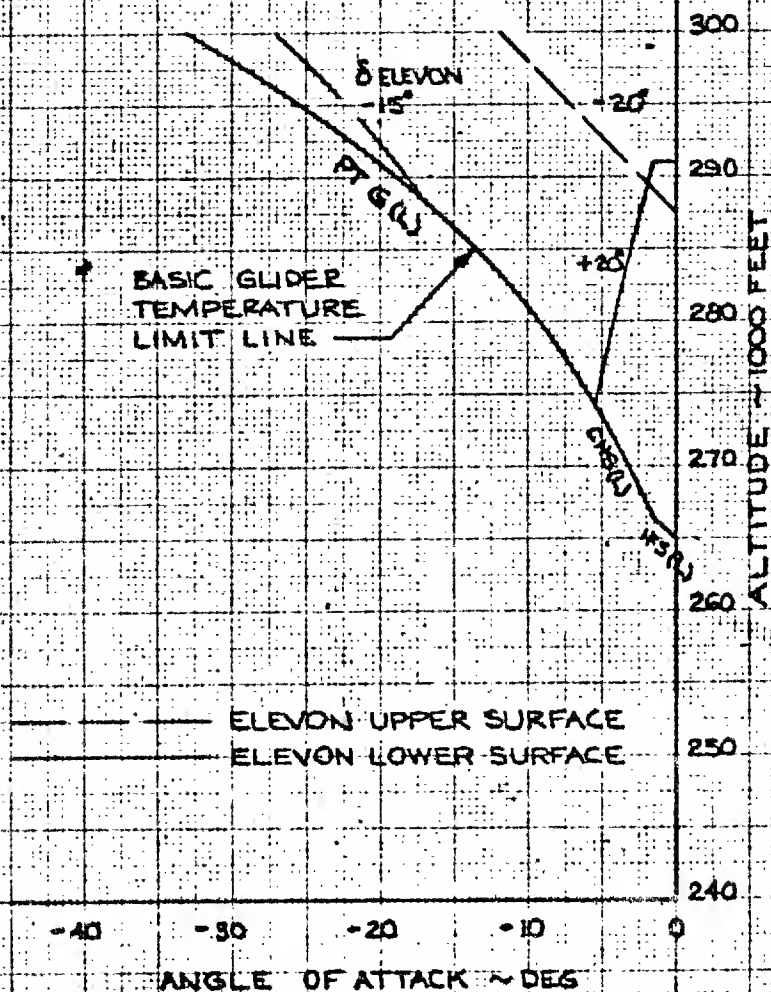

CALC	BWR	12-8-61	REVISED	DATE
CHECK	A C T	12-12-61	12-12-61	
APR				
APR				

TEMPERATURE LIMIT ALTITUDES
ELEVONS, V = 27000 FPS

THE BOEING COMPANY

FIG
5.20

D2-80065


PAGE
5.23

CONFIDENTIAL

CONFIDENTIAL

CONFIDENTIAL

ANGLE OF ATTACK ~ DEG.

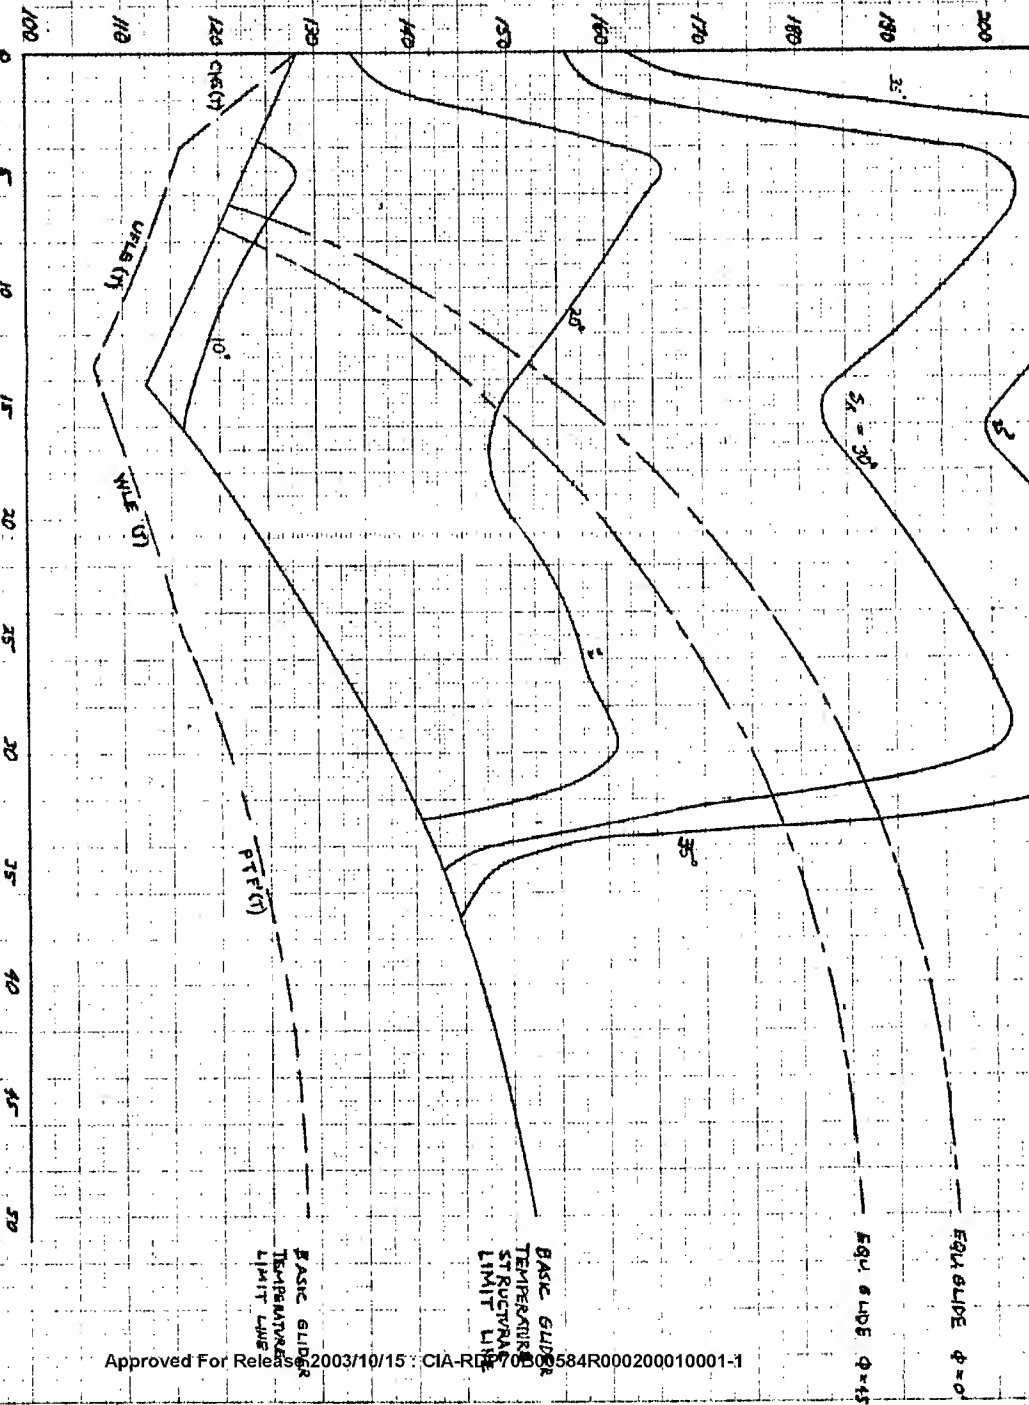

ALTITUDE ~ 1000 FT.

CONFIDENTIAL

US 4041 7000

CONFIDENTIAL

MAINTAIN FILE


CALC	C.R. 2000/11	10/14/11	REVISED	DATE	TEMPERATURE LIMIT ALTITUDES	844-2050D
CHECK	10/14/11	12-14-11			ROUNDER	02-80045
APPRO					10/19/2000 PMS	PAGE 5.25

FILE 5.22

16.523
844-
050D
2-80065
5726

CONFIDENTIAL

CONFIDENTIAL

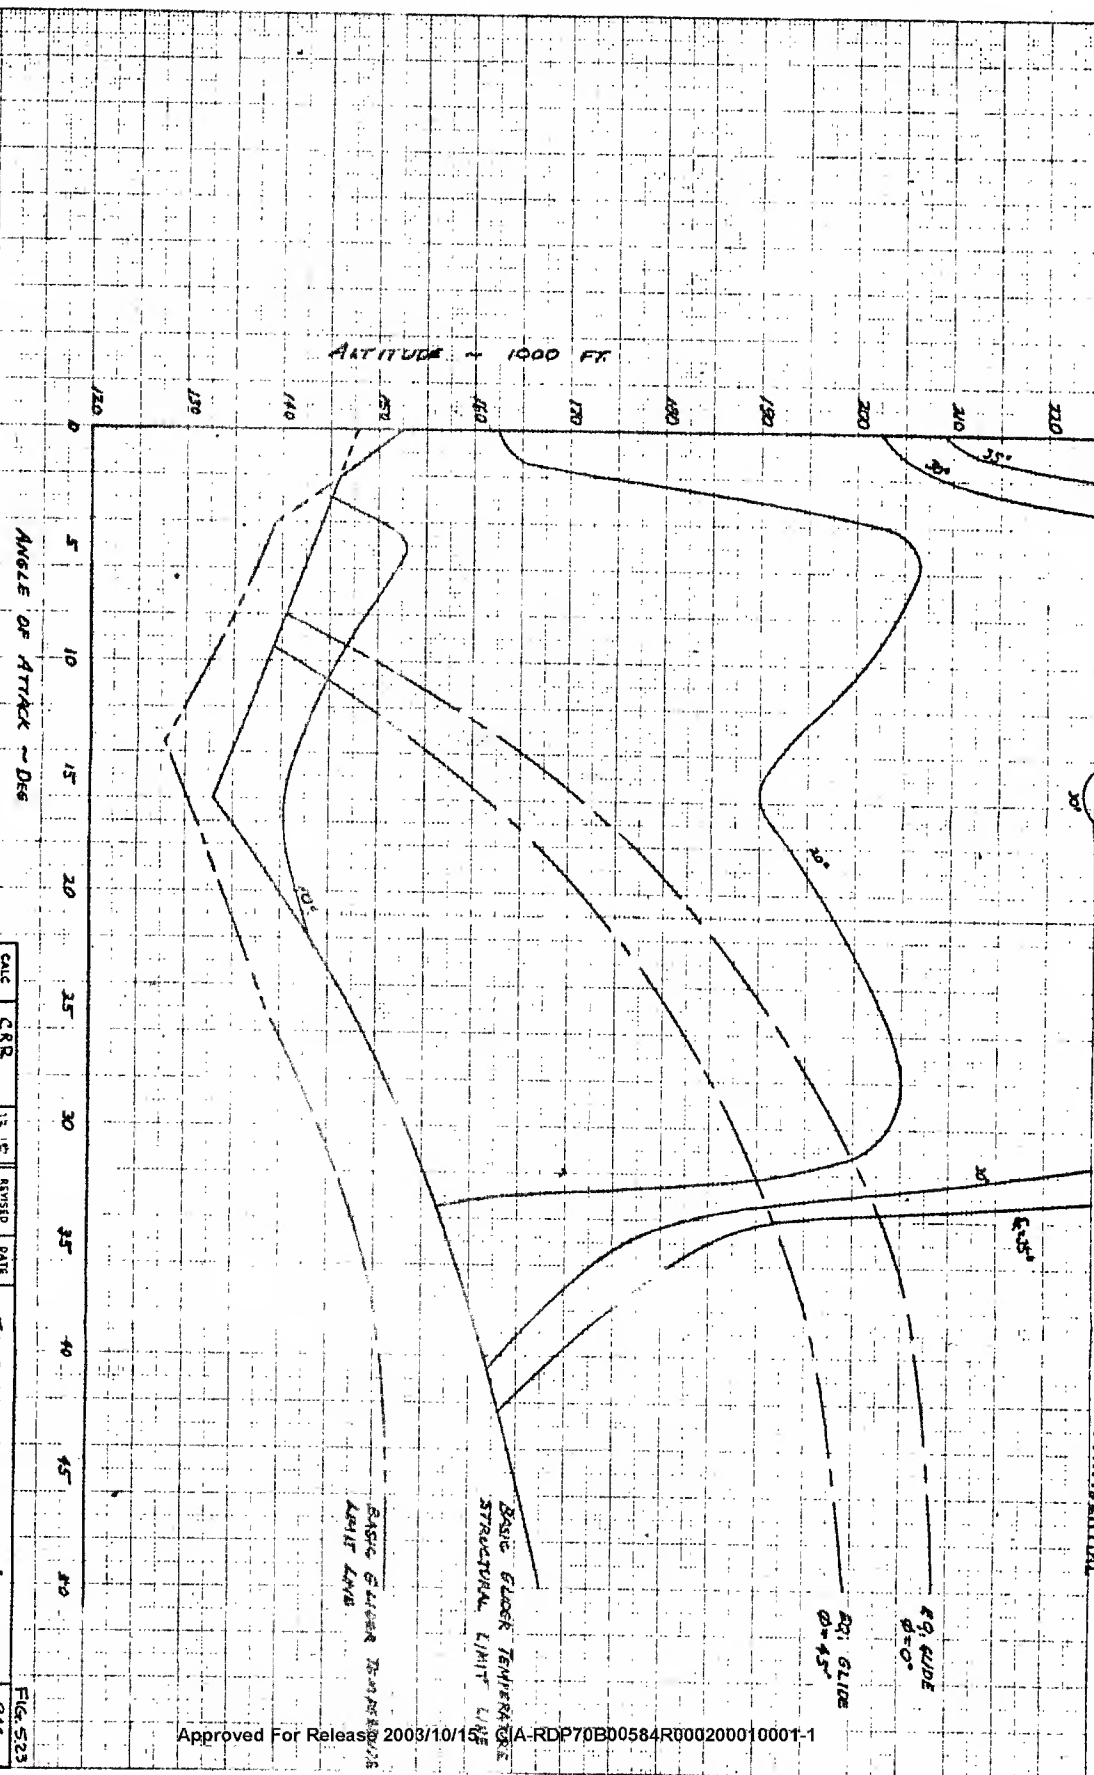

ANGLE OF ATTACK - Deg

ALTITUDE - 1000 FT

EQ. GLIDE
 $\theta = 45^\circ$

EQ. GLIDE
 $\theta = 0^\circ$

BASIC GLIDE TEMPERATURE
STRUCTURAL LIMIT LINE

BASIC GLIDE TEMPERATURE
LIMIT LINE

TEMPERATURE LIMIT: ALTITUDES

RUBBER
V-12 C40 FPS

CALC	C&R	12.15	REVISOR	DATE	FIG. 523
CHECK	A.C.T.	12.15			844- 2050D
APPRO					02-80065
APPRO					PAGE 5726

CONFIDENTIAL


112 APR 61 7000

CONFIDENTIAL

NOT RECORDED 1961

CONFIDENTIAL

CONFIDENTIAL

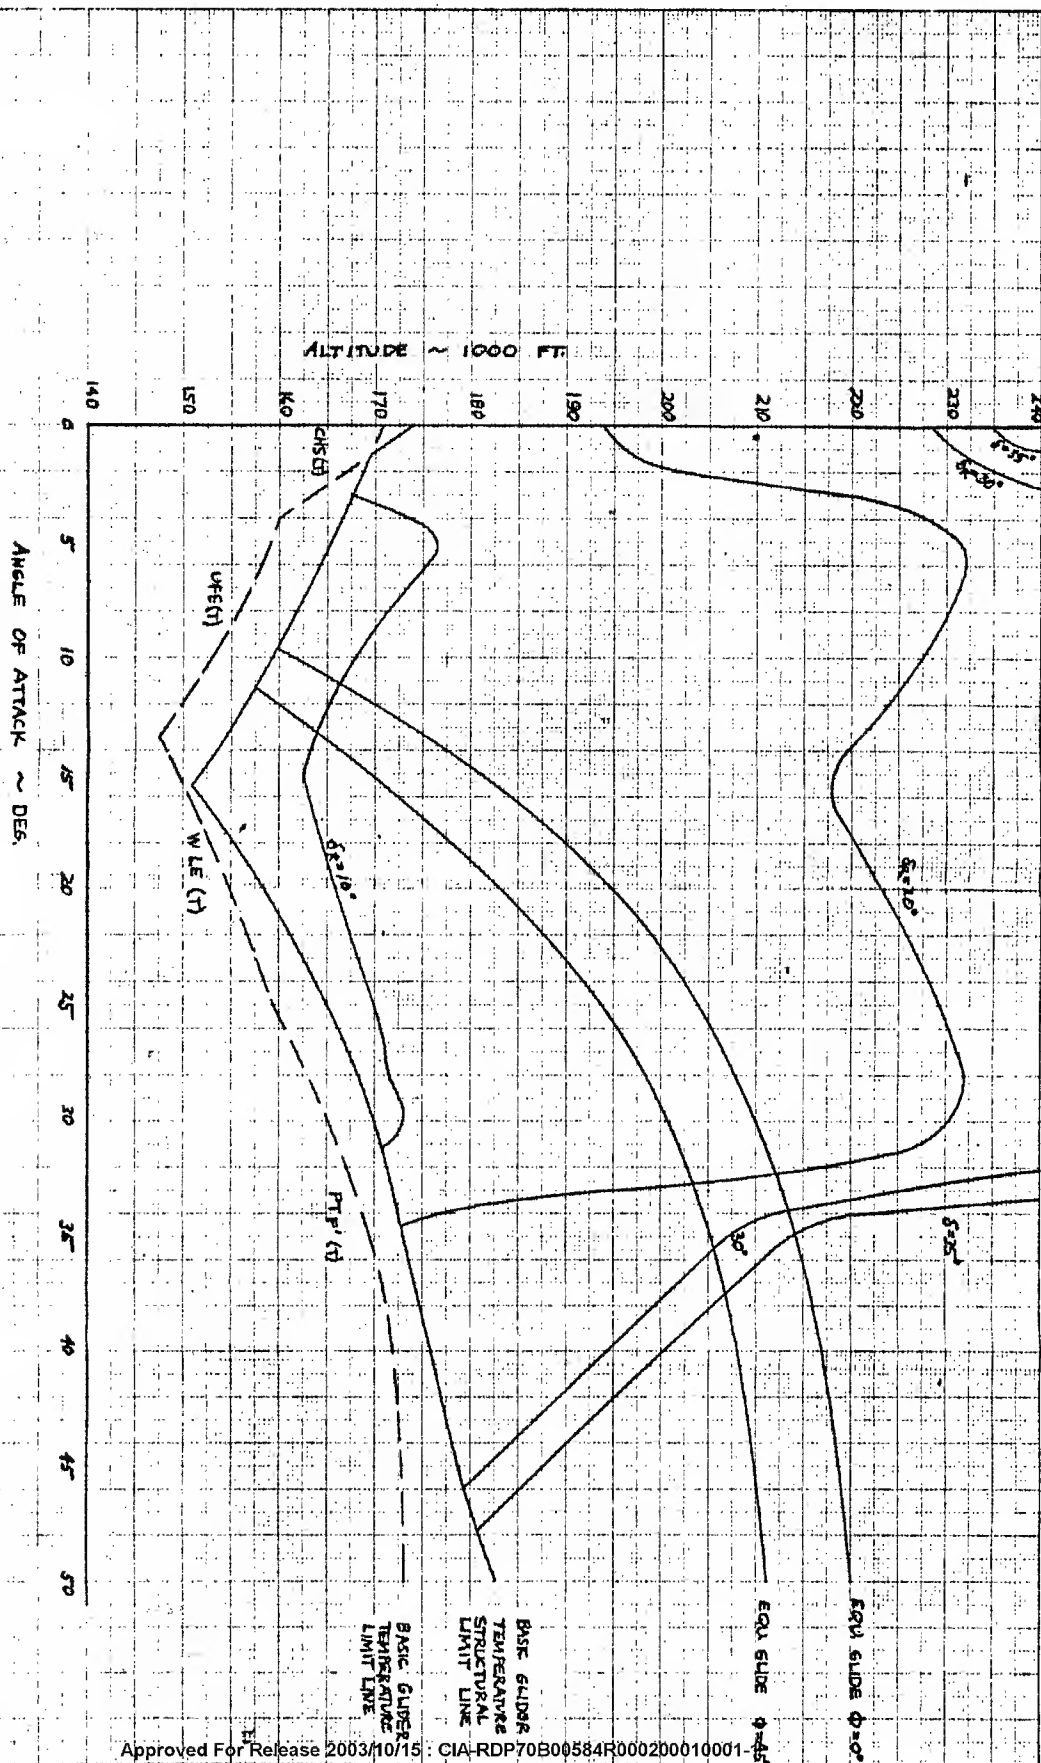

CALC	C.R. Kurell	REVISED	DATE	TEMPERATURE LIMIT ALTITUDES	FILE S-24
CHECK	DEZ	12-1-64	12-1-64	844-20500	
APPRO				Y= 14,000 FPS	
APPRO				02-80065	
				PAOS	5.27


CONFIDENTIAL

UJ 4041 7000

CONFIDENTIAL

USE 8 JAN 1965

CONFIDENTIAL

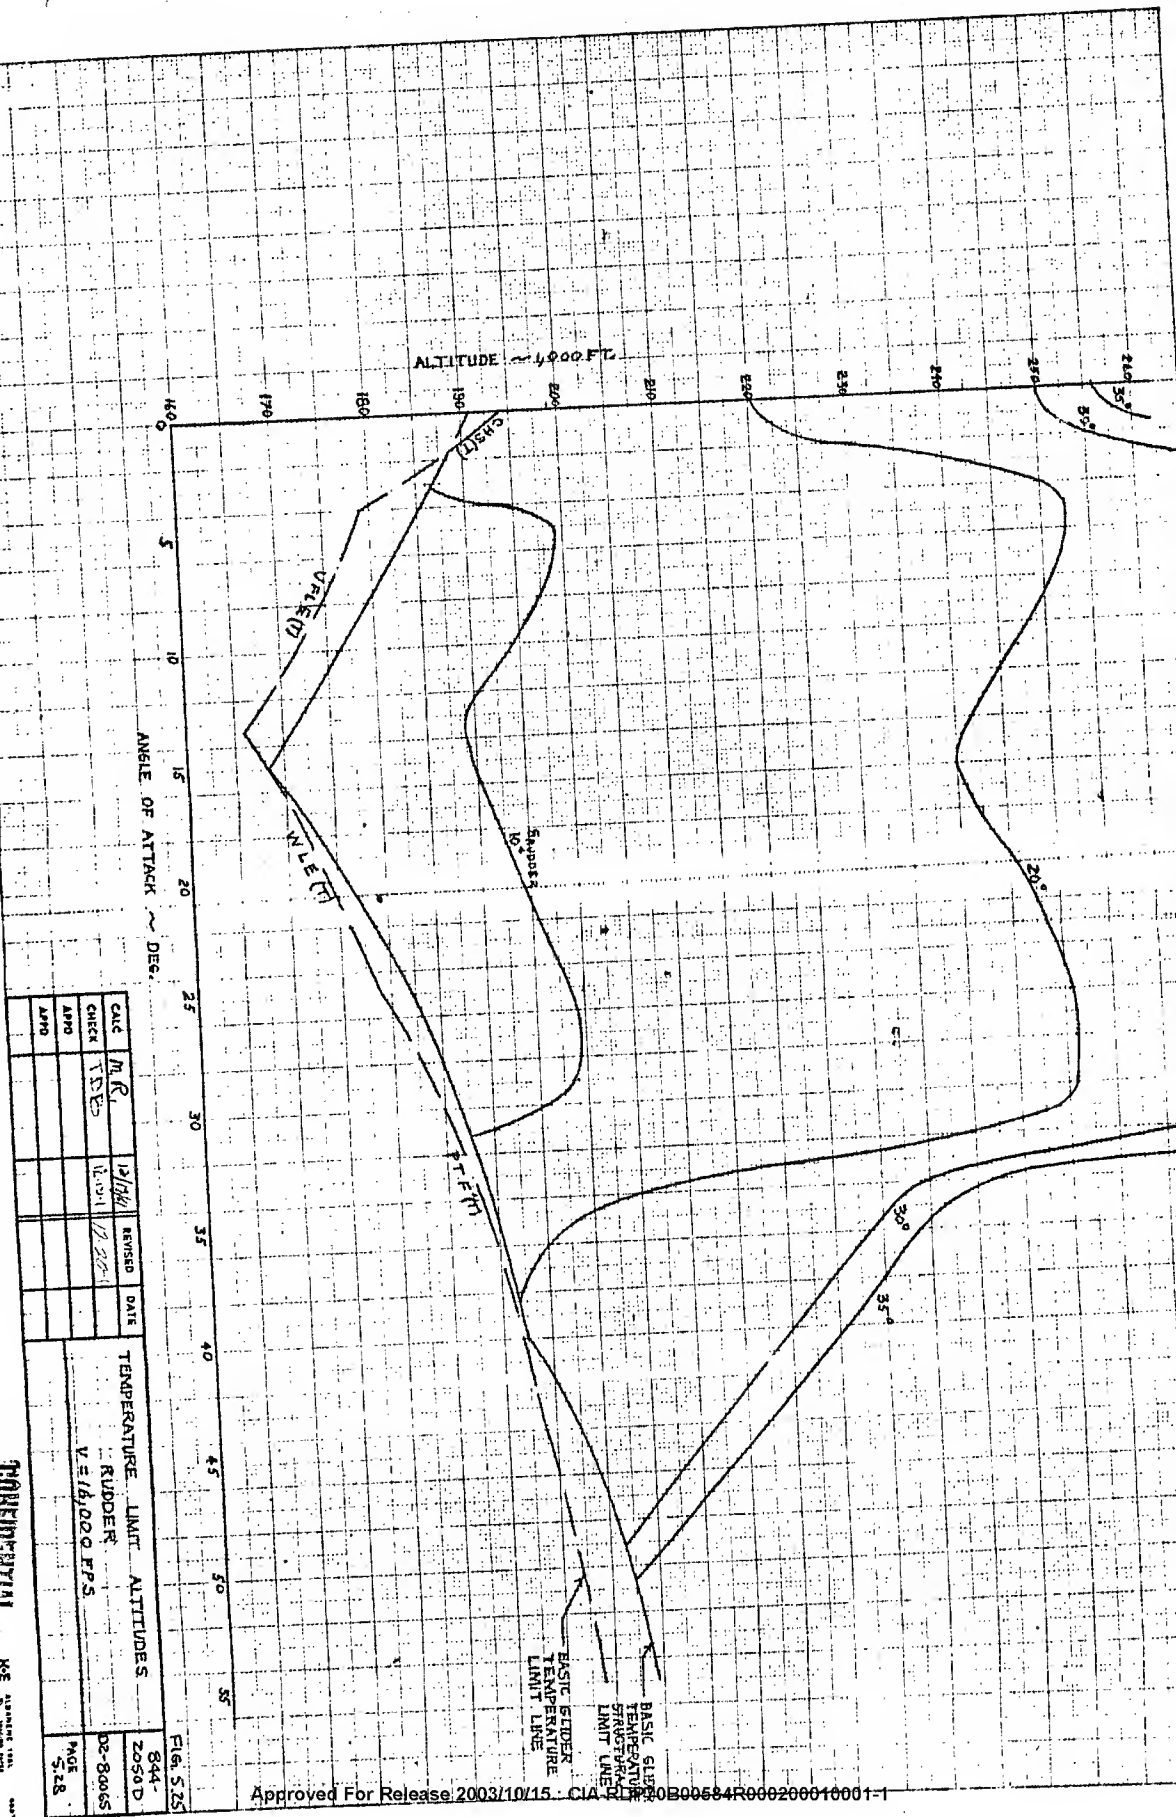

CONFIDENTIAL


00000 1707 611

CONFIDENTIAL

0003
ALABAMA 1981
KOE
Telling Facts

CONFIDENTIAL

CONFIDENTIAL

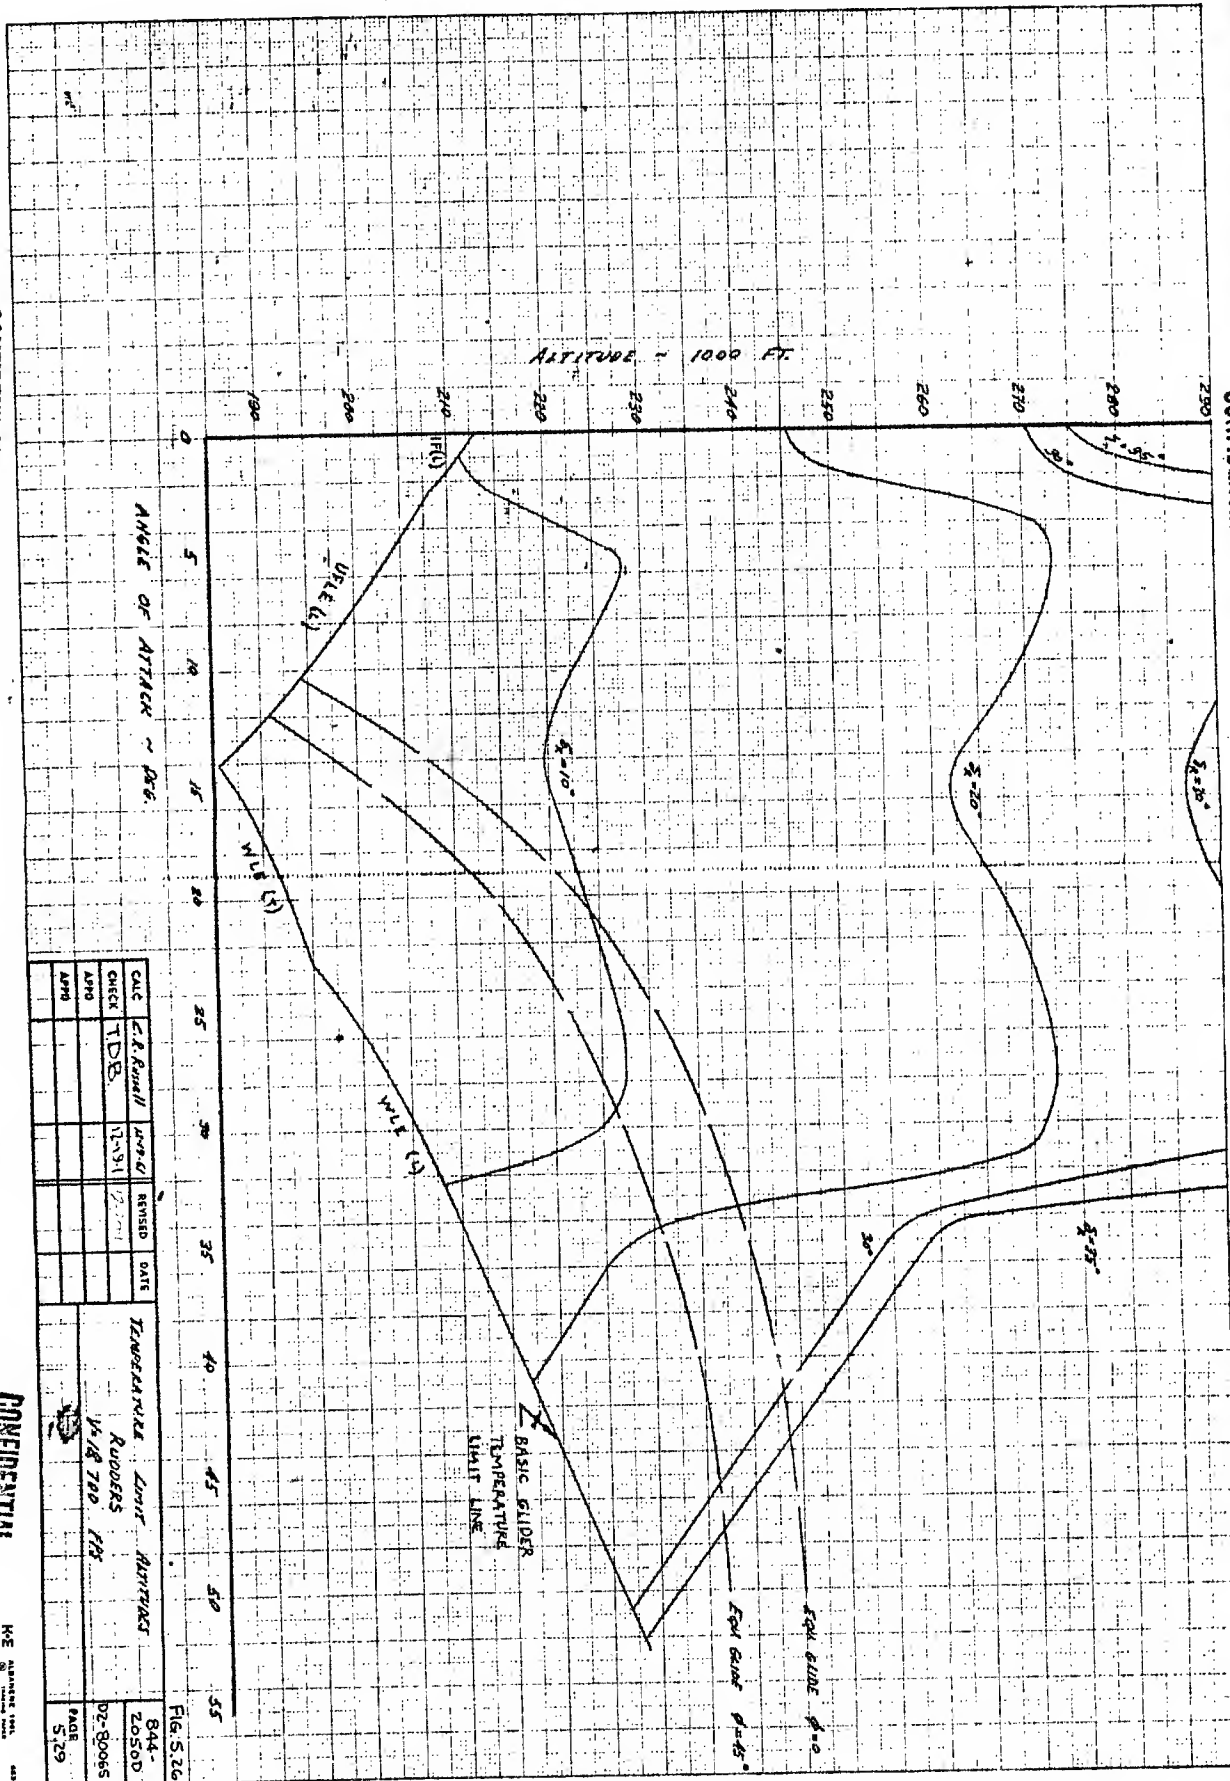

CONFIDENTIAL

U.S. 4041 7000

CONFIDENTIAL

APPROVED FOR RELEASE 2003/10/15 : CIA-RDP70B00584R000200010001-1


CALC	C.R. RUMH	APPROV	REVIEW	DATE	TEMPERATURE LIMIT ALTITUDE	BAU
CHECK	TDB	U-91	U-91		U-91 700 FT	20500
APPRO						DE-90065
APPRO						PAGE 5.29

CONFIDENTIAL

CONFIDENTIAL

ANGLE OF ATTACK - DEG.

ALTITUDE ~ 1000 FT.

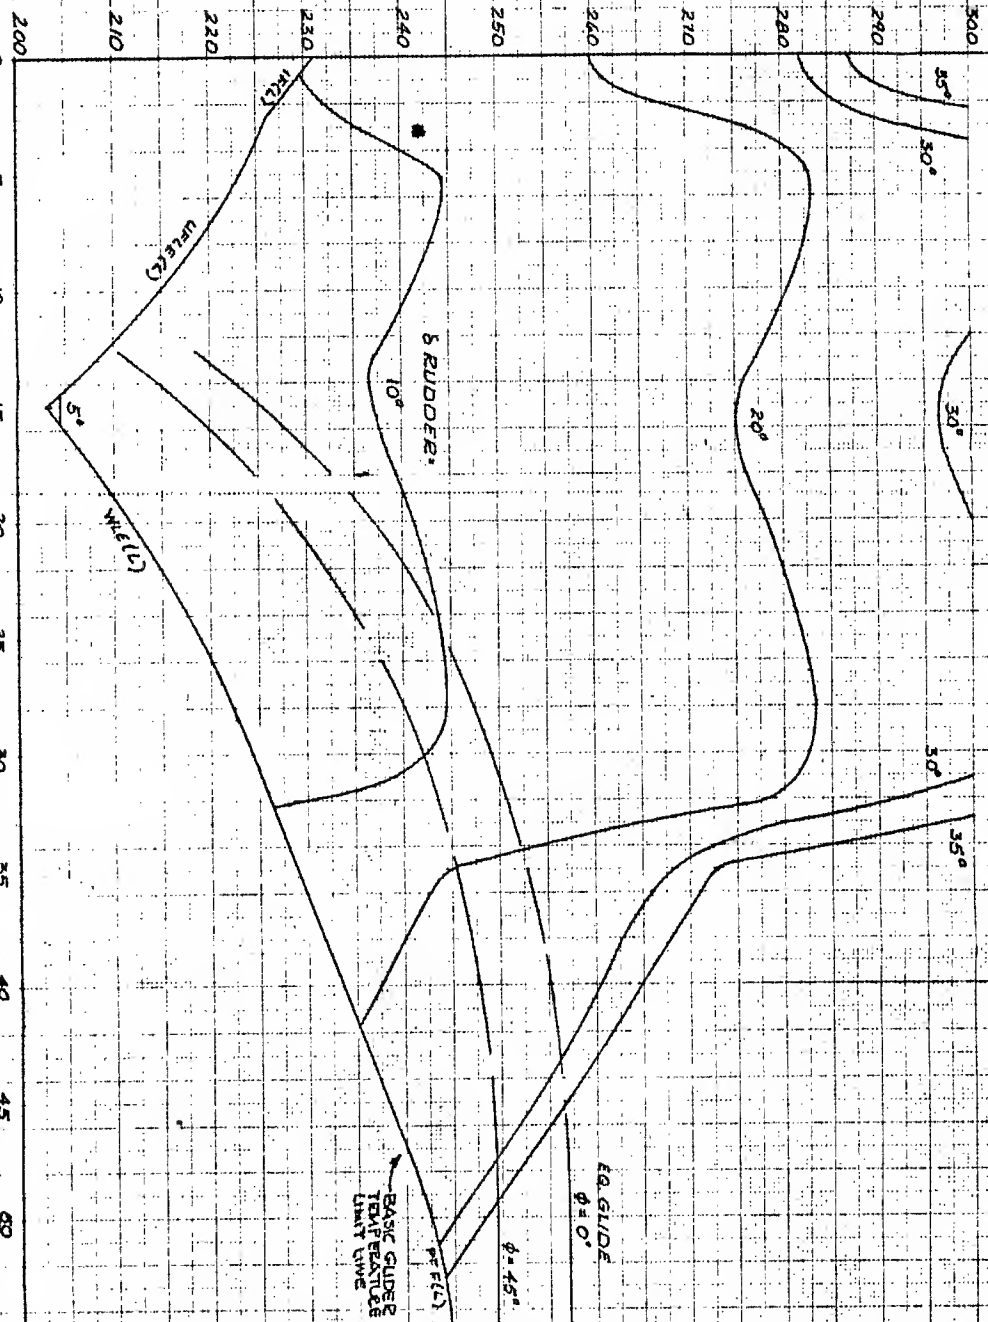

CALC	DE. BENNETT	12-16-61	REMOVED	DATE	TEMPERATURE LIMIT ALTITUDE
CHECK	T. B.	12-11-61			RUDDERS V=20,700 FPS
APPD					
APPD					
PAGE					844-2050D
					02-80065
					PAGE 5.30

FIG. 5.27


CONFIDENTIAL

U.S. AIR FORCE

CONFIDENTIAL

U.S. AIR FORCE

CONFIDENTIAL



CONFIDENTIAL

U3 4041 7000

CONFIDENTIAL

Approved For Release 2003/10/15 : CIA-RDP70B00584R000200010001-1

DATE	DEPARTMENT	2-18-74	REVISED	DATE	TEMPERATURE LIMIT ALTITUDES	
CHECK	ACT	12-1-74			RUDDEFS	V=23,000 FPS
APPRO						02-830655
APPRO						57-31
						PAGE

Fig. 5.28

27-5-28


20500

59008-24

PAGE 1

1000

CONFIDENTIAL

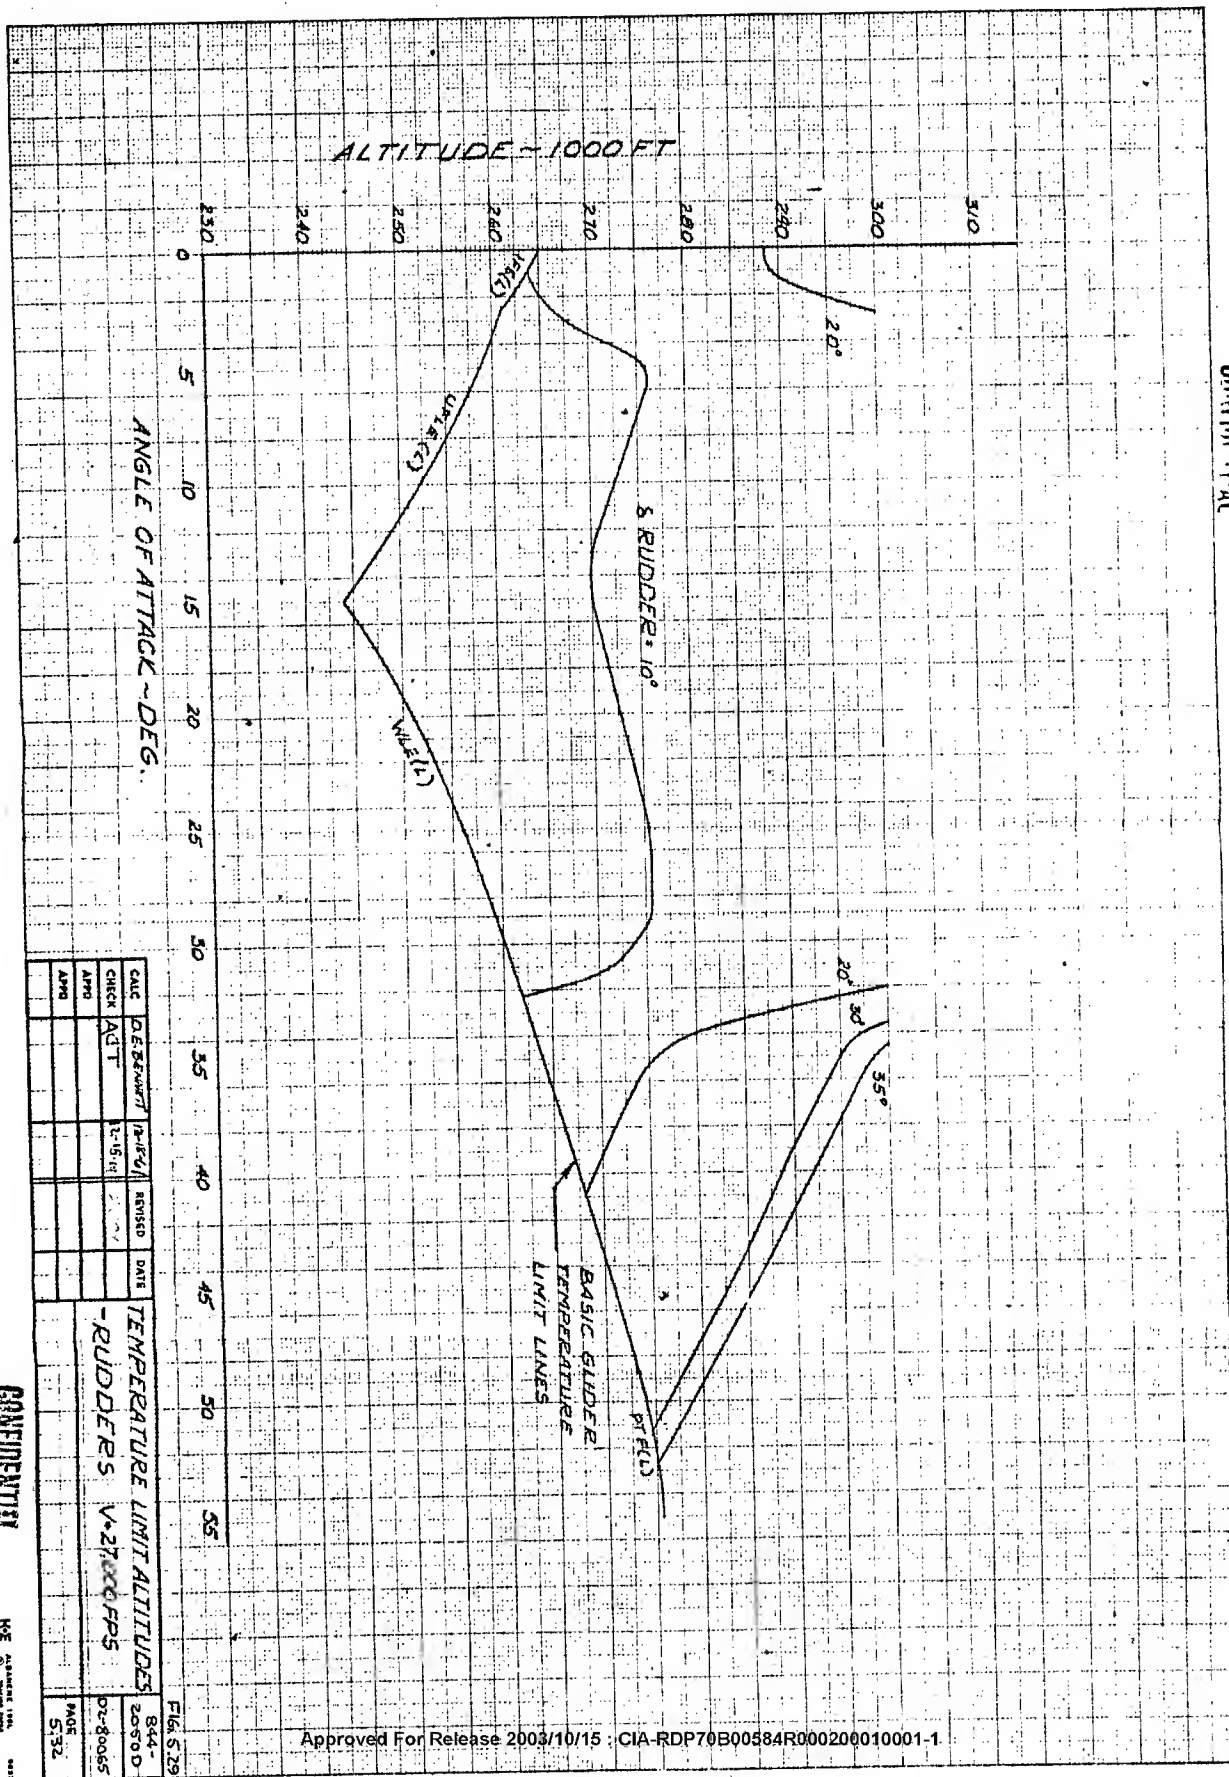

CONFIDENTIAL

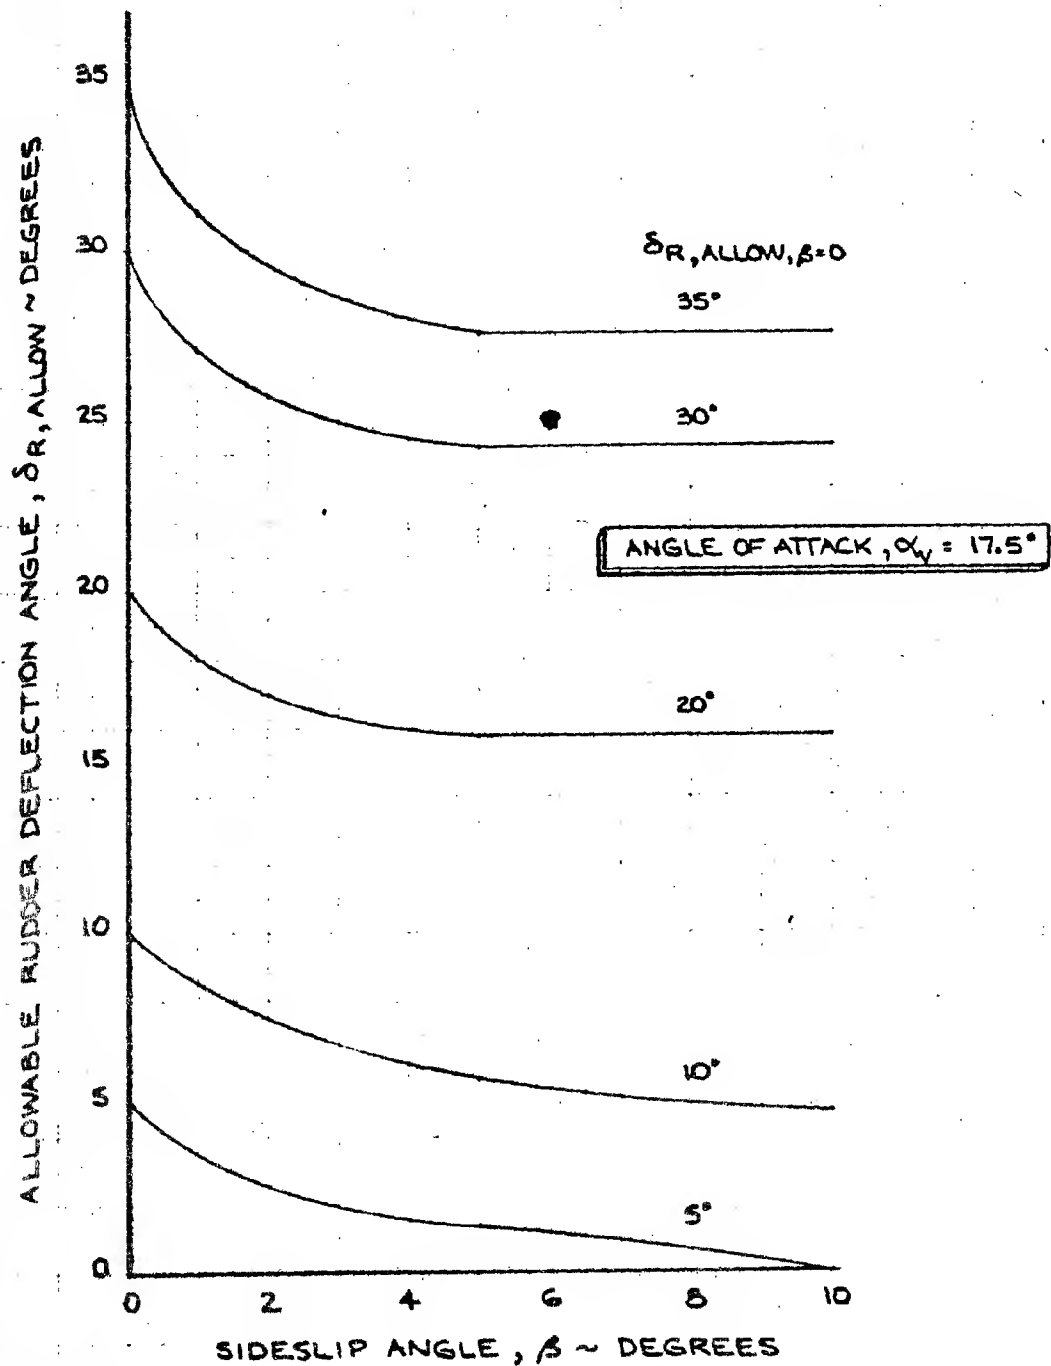


FIG. 5.30

CALC	TDB/BNR	12-13-64	REVISED	DATE	MAXIMUM ALLOWABLE RUDDER DEFLECTION	844- 2050D
CHECK	TDB	12-13-64	12-22-64			DZ-80065
APR						PAGE
APR						533
					THE BOEING COMPANY	

CONFIDENTIAL

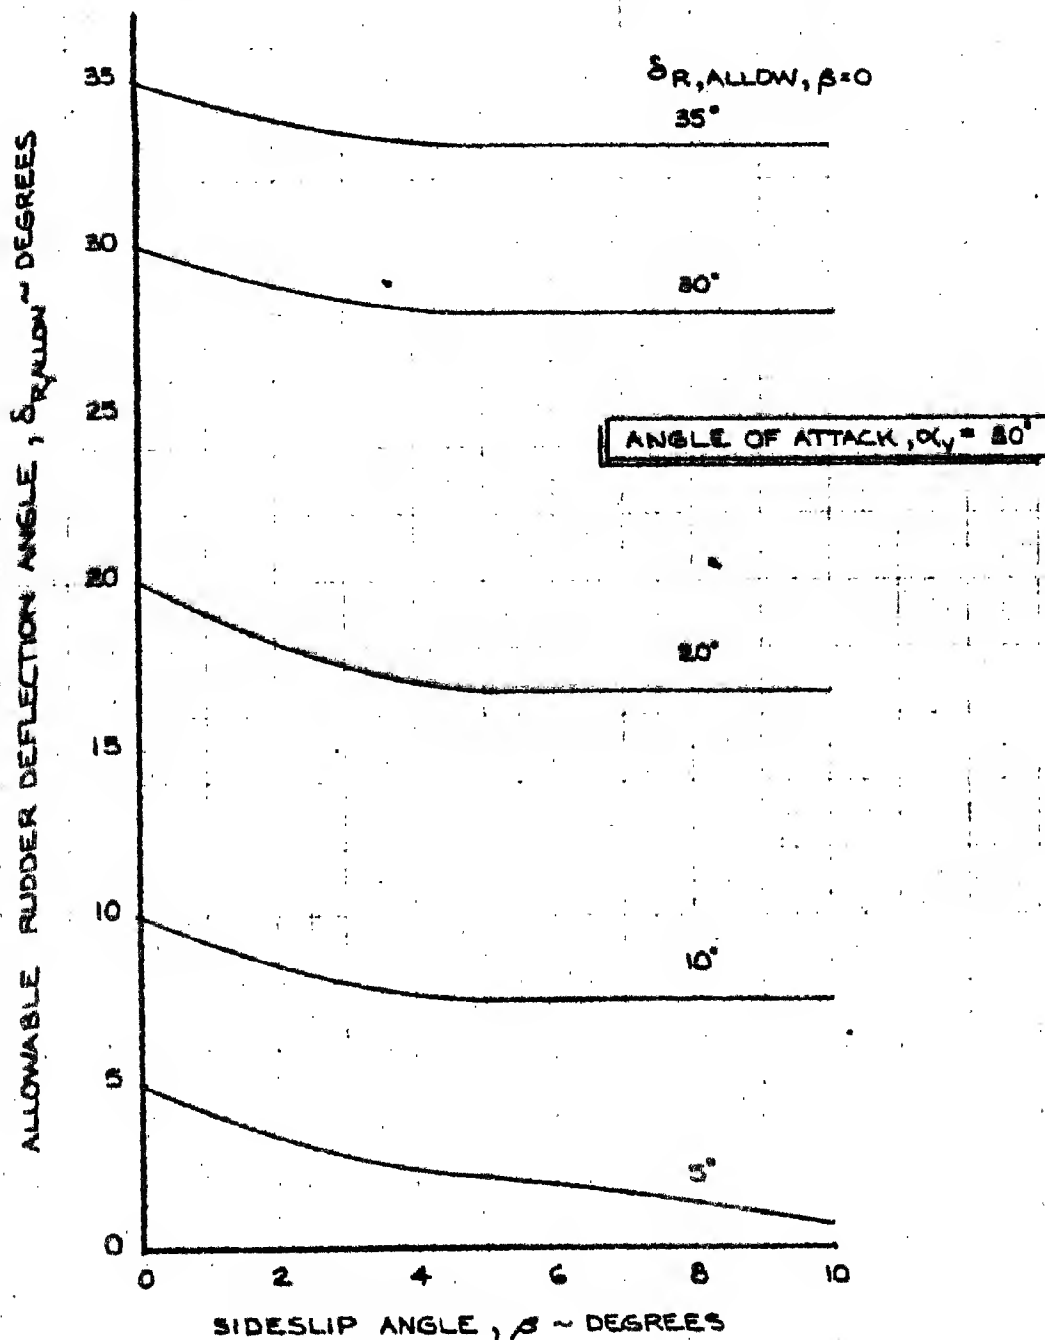


FIG. 5.31

CALC	TDB/SWE	12-15-61	REVISED	DATE	MAXIMUM ALLOWABLE RUDDER DEFLECTION	844- 2050 D
CHECK	T. E.	12-20-61				DZ-80065
APR						PAGE
APR						5.34
THE BOEING COMPANY						

CONFIDENTIAL

K-E ALBANY 1961 6062

CONFIDENTIAL

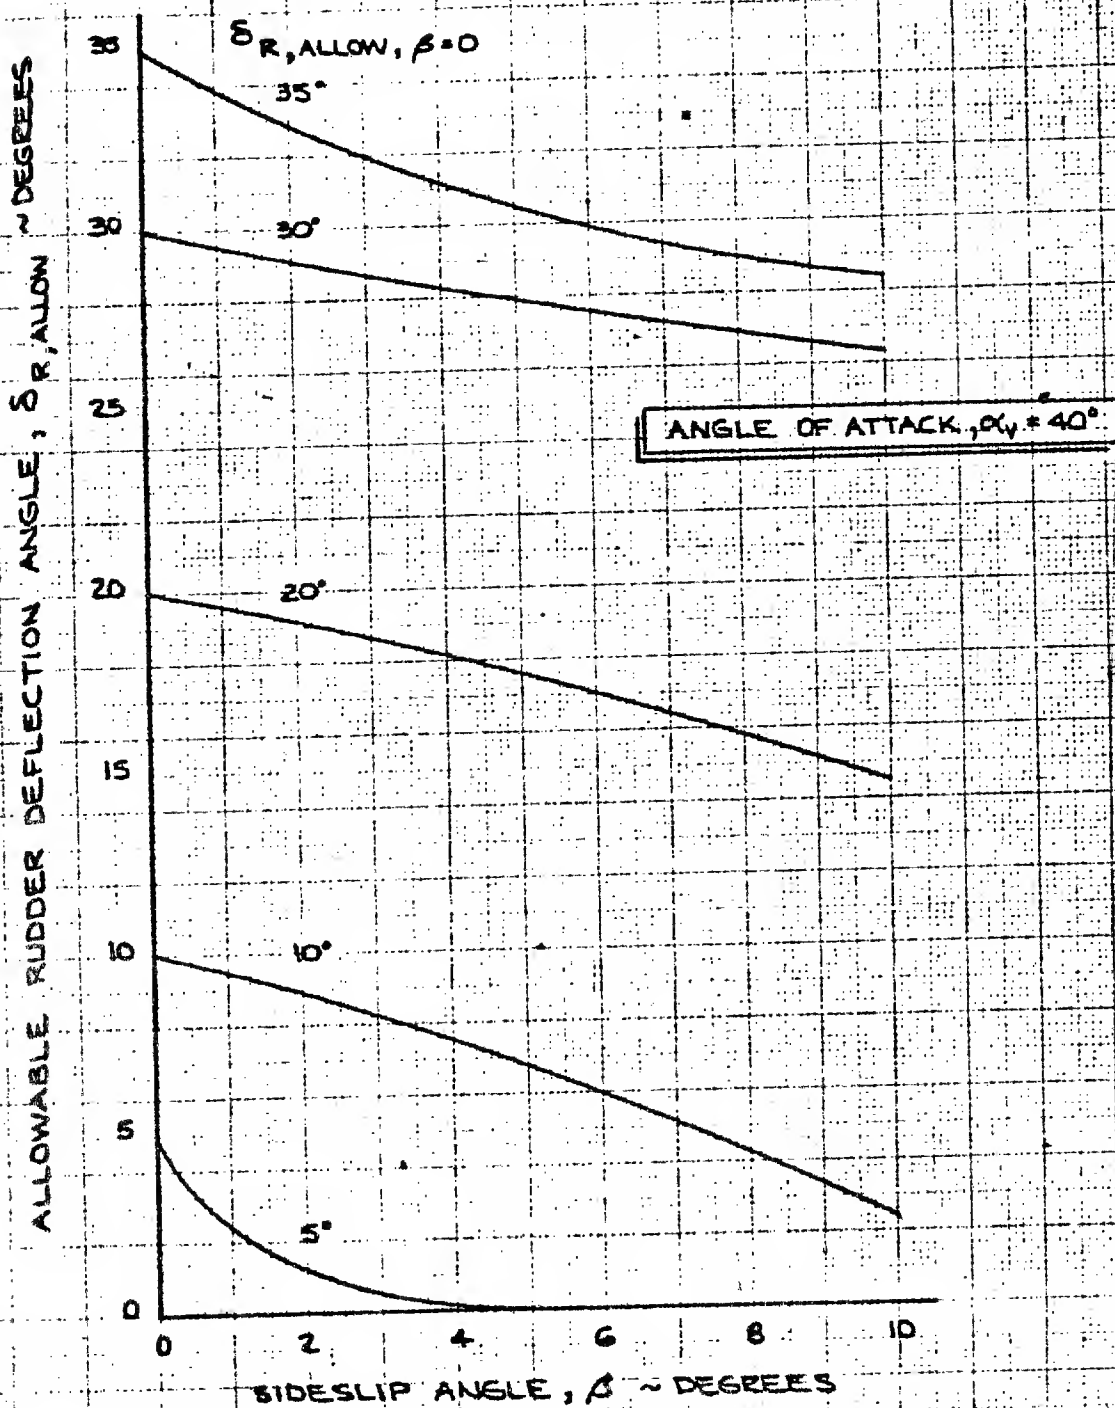


FIG. 5.32

CALC	TDB/BNR	12-19-61	REVISED	DATE
CHECK	T.P.	12-20-61		
APR				
APR				

MAXIMUM ALLOWABLE
RUDDER DEFLECTION

THE BOEING COMPANY

844-2050D
DZ-80065
PAGE 5.35

CONFIDENTIAL

CONFIDENTIAL

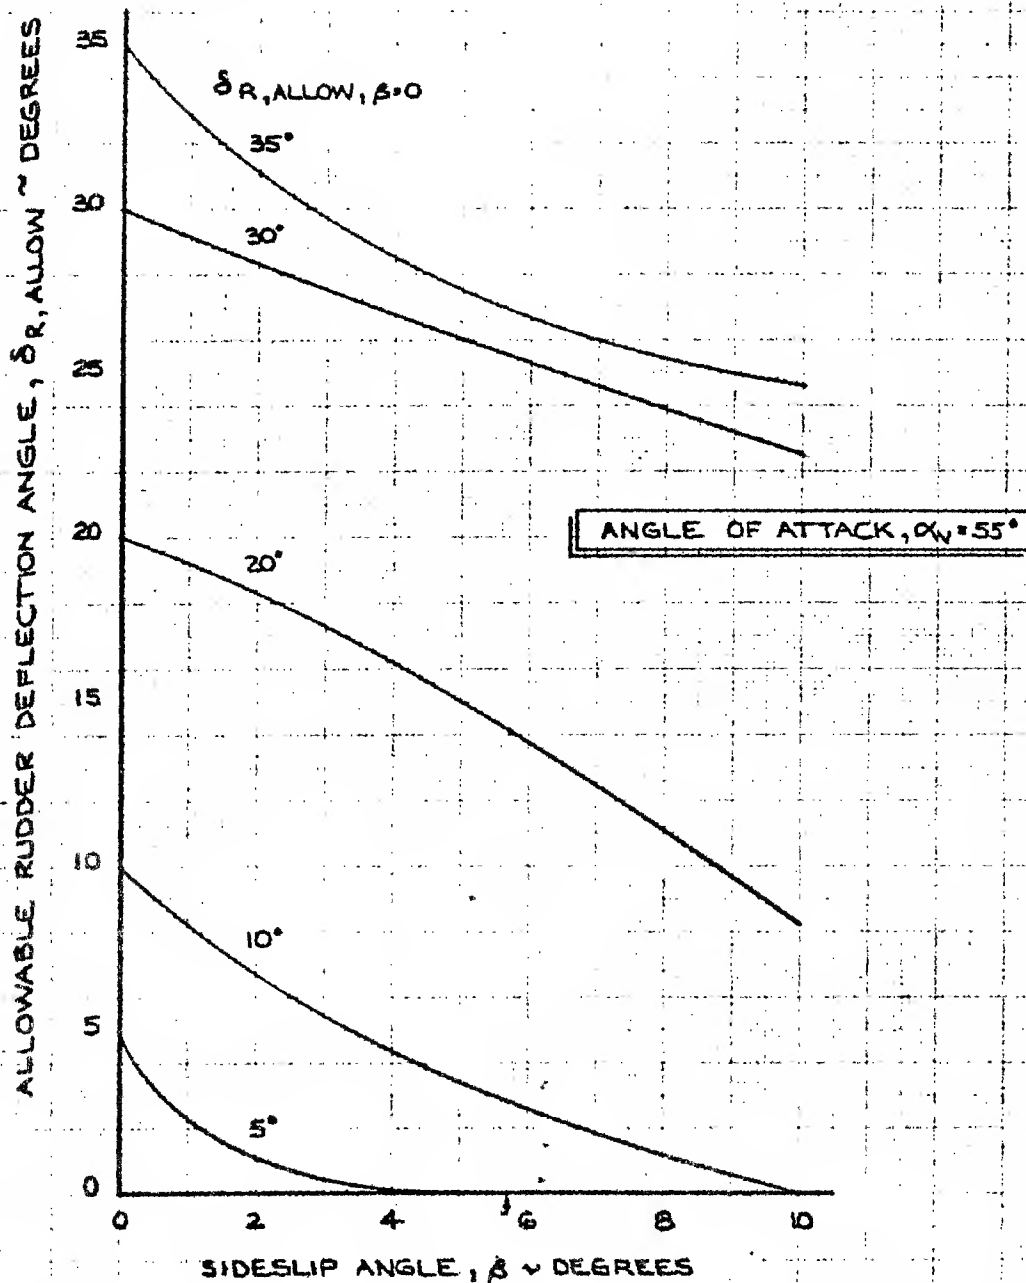


FIG. 5.33

CALC	TDB/SWR	12-18-61	REVISED	DATE	MAXIMUM ALLOWABLE RUDDER DEFLECTION	844- 20500
CHECK	11 E	12-22-61				02-80065
APR						PAGE
APR						5.36
THE BOEING COMPANY						

U3 4013 8000

CONFIDENTIAL

K-E ALBANY 1971 88587

CONFIDENTIAL**6.0** GLIDER STATIC STABILITY AND CONTROL

The static stability and control aerodynamic characteristics and surface hinge moment characteristics for the Dyna Soar glider, model 844-2050 revision D are presented in the following sub sections. The data from Mach number of 22 and 250,000 feet altitude through low speed landing are based on wind tunnel data. Modifications to these data were required to account for configuration changes that occurred on the last revision to the glider configuration.

Most of the data presented are for the rigid glider. Effects of thermal deformation on longitudinal stability and control are presented at hypersonic speeds. Only limited data on the aeroelastic glider are presented. These data are shown in Section 8. In general, the effects of thermal deformation and aeroelasticity are small. Additional work is currently in progress to better define these characteristics. These data will be presented in future revisions to this document.

Some limited data are also presented on longitudinal stability and control at extreme altitudes at near orbital velocity. Data are presented at altitudes to 500,000 feet where free molecular flow was assumed. These data are based on the limited theory available and maybe subject to significant errors, particularly at the intermediate altitudes around 350,000 feet.

12-20-1

US 4070 7000 REV. 3/61

CONFIDENTIAL**BOEING**

NO. D2-80065

CONFIDENTIAL

6.1 LONGITUDINAL STABILITY AND CONTROL

Presented in this section are the static longitudinal stability parameters of the Dyna-Soar glider configuration 844-2050 D over the Mach range from landing speed to high hypersonic. Longitudinal stability and elevon effectiveness are defined by normal force and pitching moment coefficients presented at the nominal center of gravity location of 44% of the mean aerodynamic chord and water line 124.

At hypersonic speeds, the glider is subject to thermal deformation produced by the flight temperature environment. Data are presented for the resulting configuration and are identified as "hot shape".

All data presented in this section are representative of the rigid glider. Aeroelastic effects have been determined and are included in Section 8.0.

Longitudinal stability and elevon effectiveness over the Mach range are summarized in the following Figures; (6.1) trimmed aerodynamic center, (6.2) normal force curve slope, (6.3) pitching moment and angle of attack at zero normal force, (6.4) elevon required to trim, and (6.5) elevon effectiveness.

12-20-1

US 4070 7000 REV. 3/61

CONFIDENTIAL

CONFIDENTIAL

CONFIDENTIAL

DYNIA SOAR

MODEL 844-2050D

RIGID

$M = 345 \text{ FT}$
 $MAC = 246 \text{ IN}$
 $C.G. = 442$

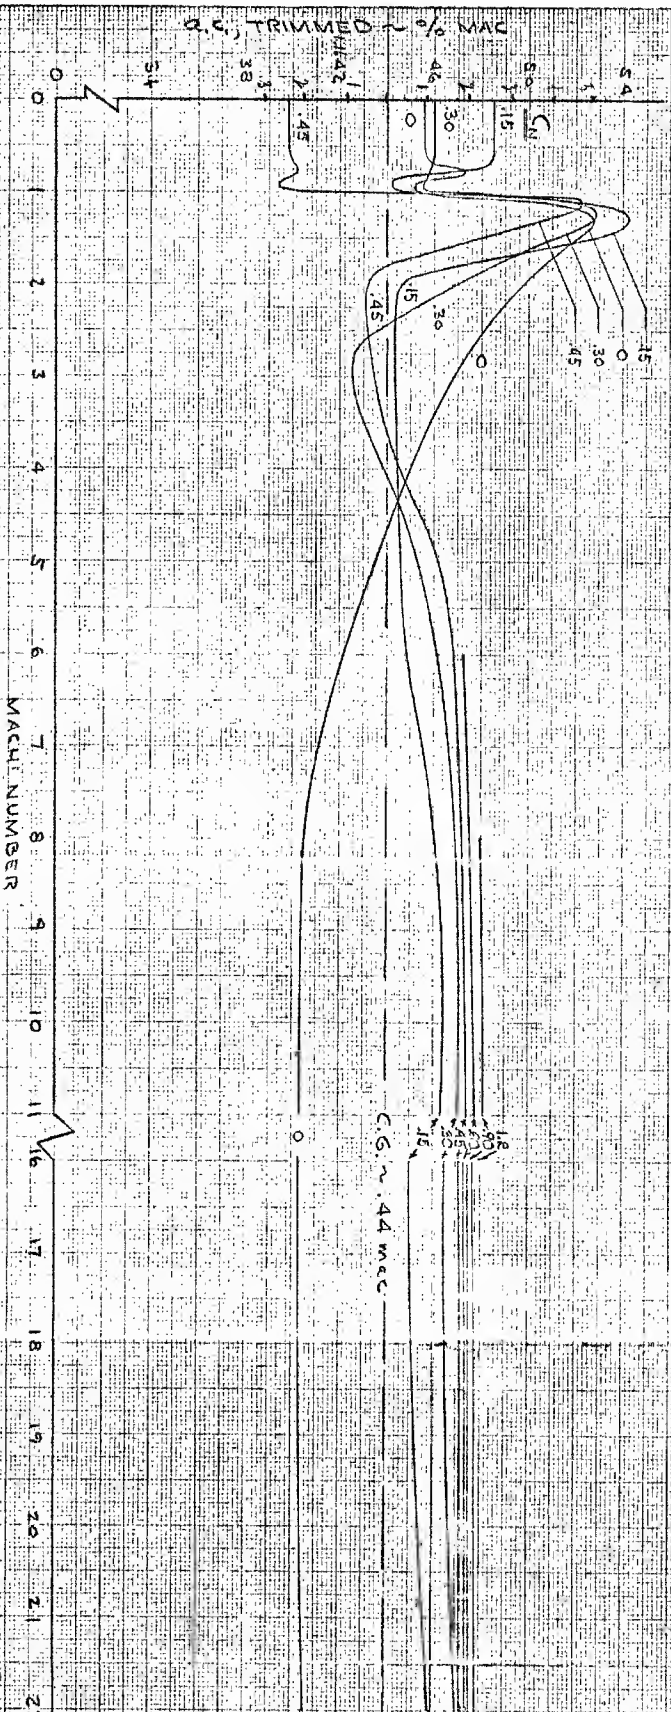


Fig. 6.1

CHECK		REVERSED	DATE	A3 RODYNAMIC CENTER LONGITUDINAL	84- 255D
CHECK		FOLD	REVISED		
APPRO			DATE		
APPRO					PAGE 63

CONFIDENTIAL

US 4041 7000

CONFIDENTIAL

CONFIDENTIAL

CONFIDENTIAL

DYNA SOAR

MODEL 844-2050D

RIGID

REF. SW=34.2 FT²
MAC=22.6 IN

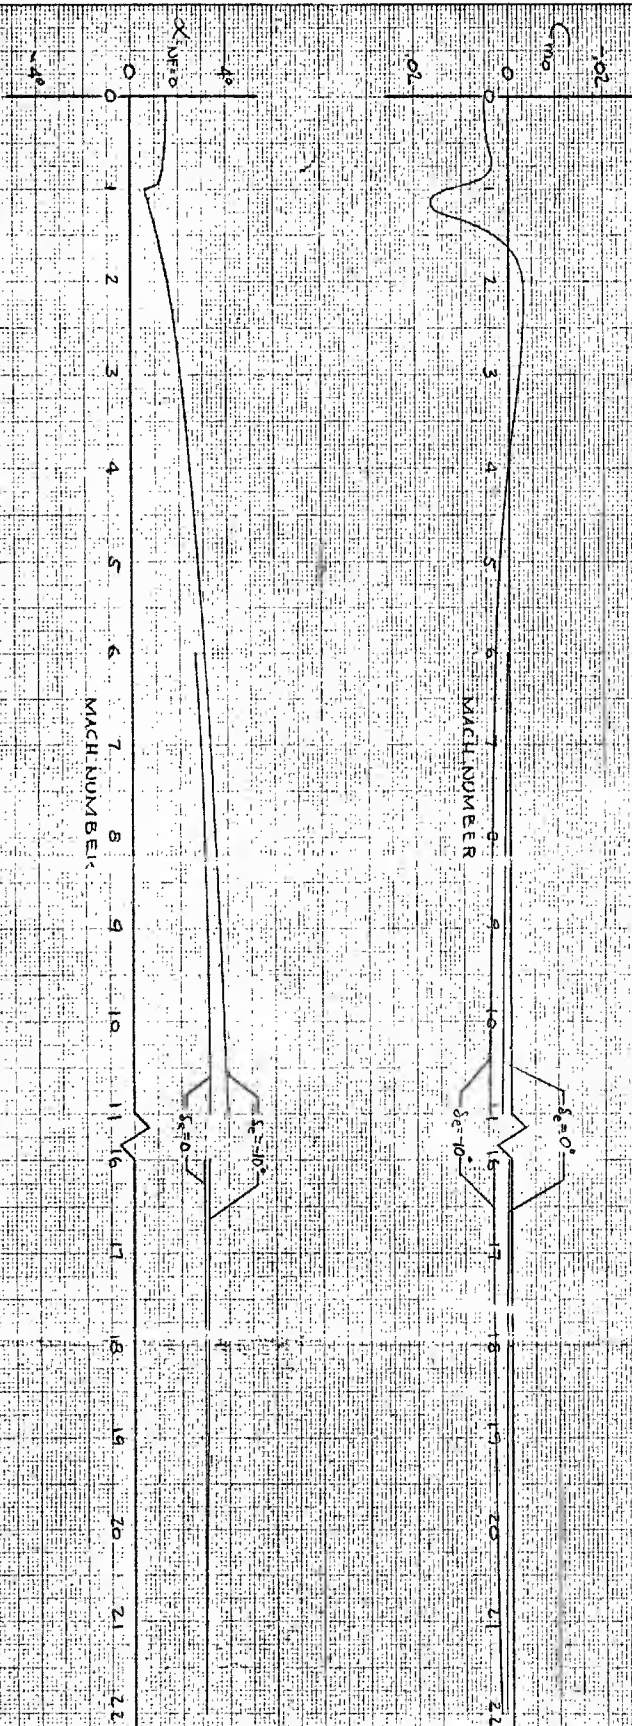


FIG. C3

CALC	CHKD	DATE	REVISION	DATE	APPROVED
1	1	1	1	1	1
2	2	2	2	2	2
3	3	3	3	3	3
4	4	4	4	4	4
5	5	5	5	5	5
6	6	6	6	6	6
7	7	7	7	7	7
8	8	8	8	8	8
9	9	9	9	9	9
10	10	10	10	10	10
11	11	11	11	11	11
12	12	12	12	12	12
13	13	13	13	13	13
14	14	14	14	14	14
15	15	15	15	15	15
16	16	16	16	16	16
17	17	17	17	17	17
18	18	18	18	18	18
19	19	19	19	19	19
20	20	20	20	20	20
21	21	21	21	21	21
22	22	22	22	22	22

ANGLE OF ATTACK AND PITCHING
MOMENT AT ZERO NORMAL FORCE

844-2050D	DT-80065
6.5	

ω, B, V, E_7

ω, B, V, E_7

CONFIDENTIAL

CONFIDENTIAL

80


CONFIDENTIAL

DYNA-SOAR

MODEL 847-2050D

Priglad

REF: SW = 345 L
MAC = 296 IN
C.G. = 44.2

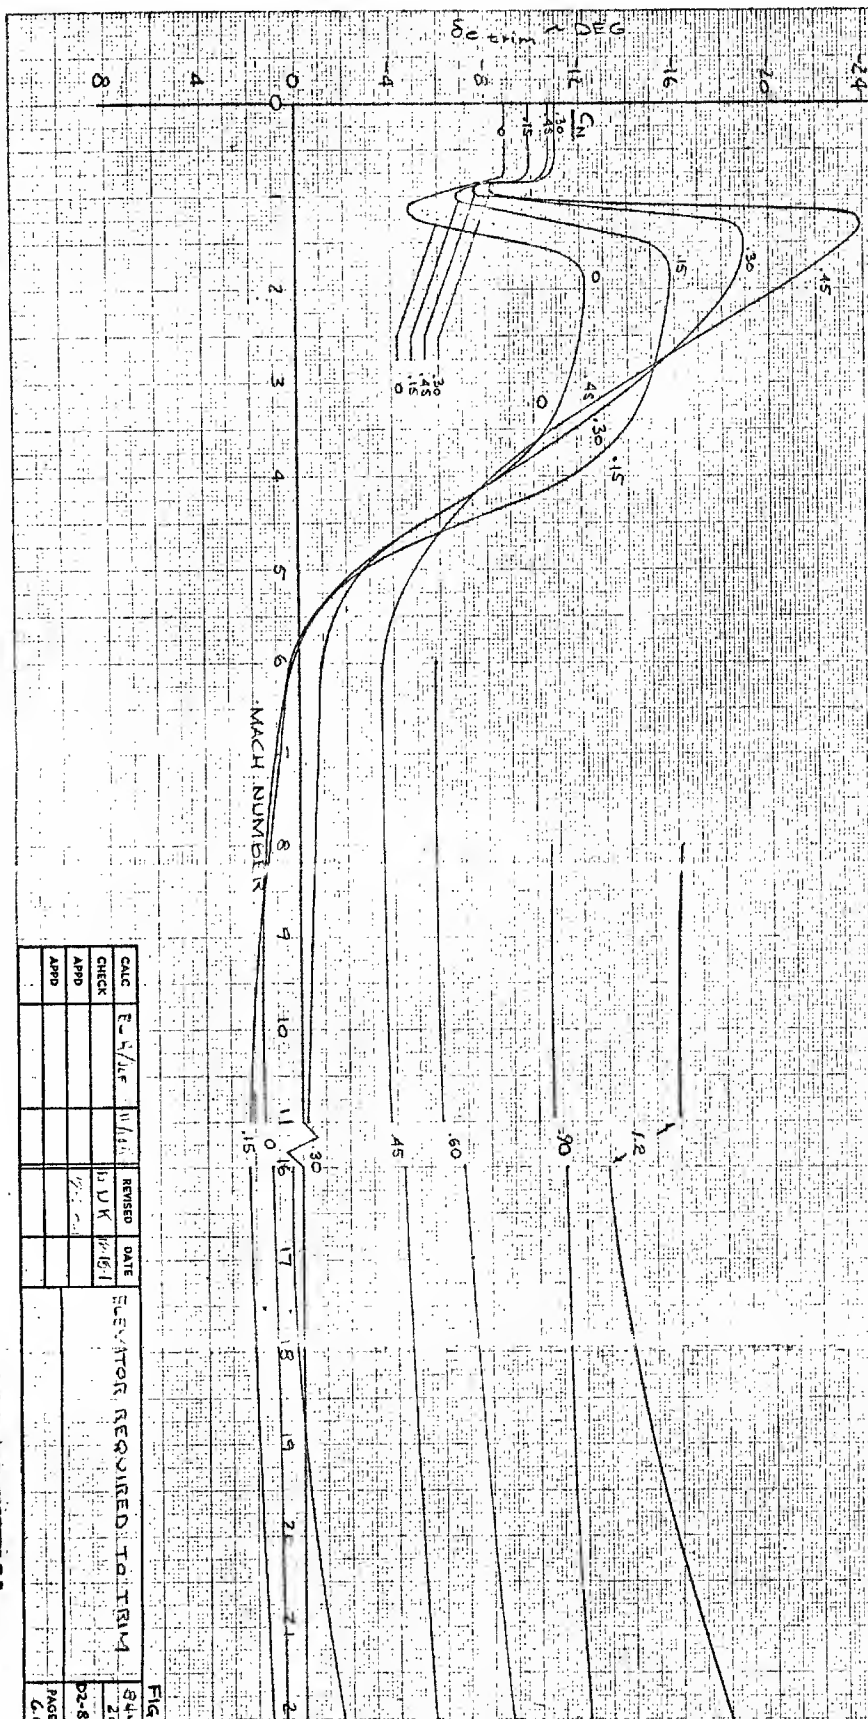

CALC	REVISED	DATE	ELEVATOR REQUIRED TO TRAVEL
CHECK	DUK	11/16/1	
APPD			
APPD			

Fig. 6.4

CONFIDENTIAL

CONFIDENTIAL

US 4041 7000

COMET

ALABAMA 1961. 603
① Trading House

18


CONFIDENTIAL

DYNAMA SCALB

MODEL 899-2050D

Relig.D

REC: SW = 395 FT
MAC = 246 IN
Se = 45.8 FT (TWO ECEVONS)

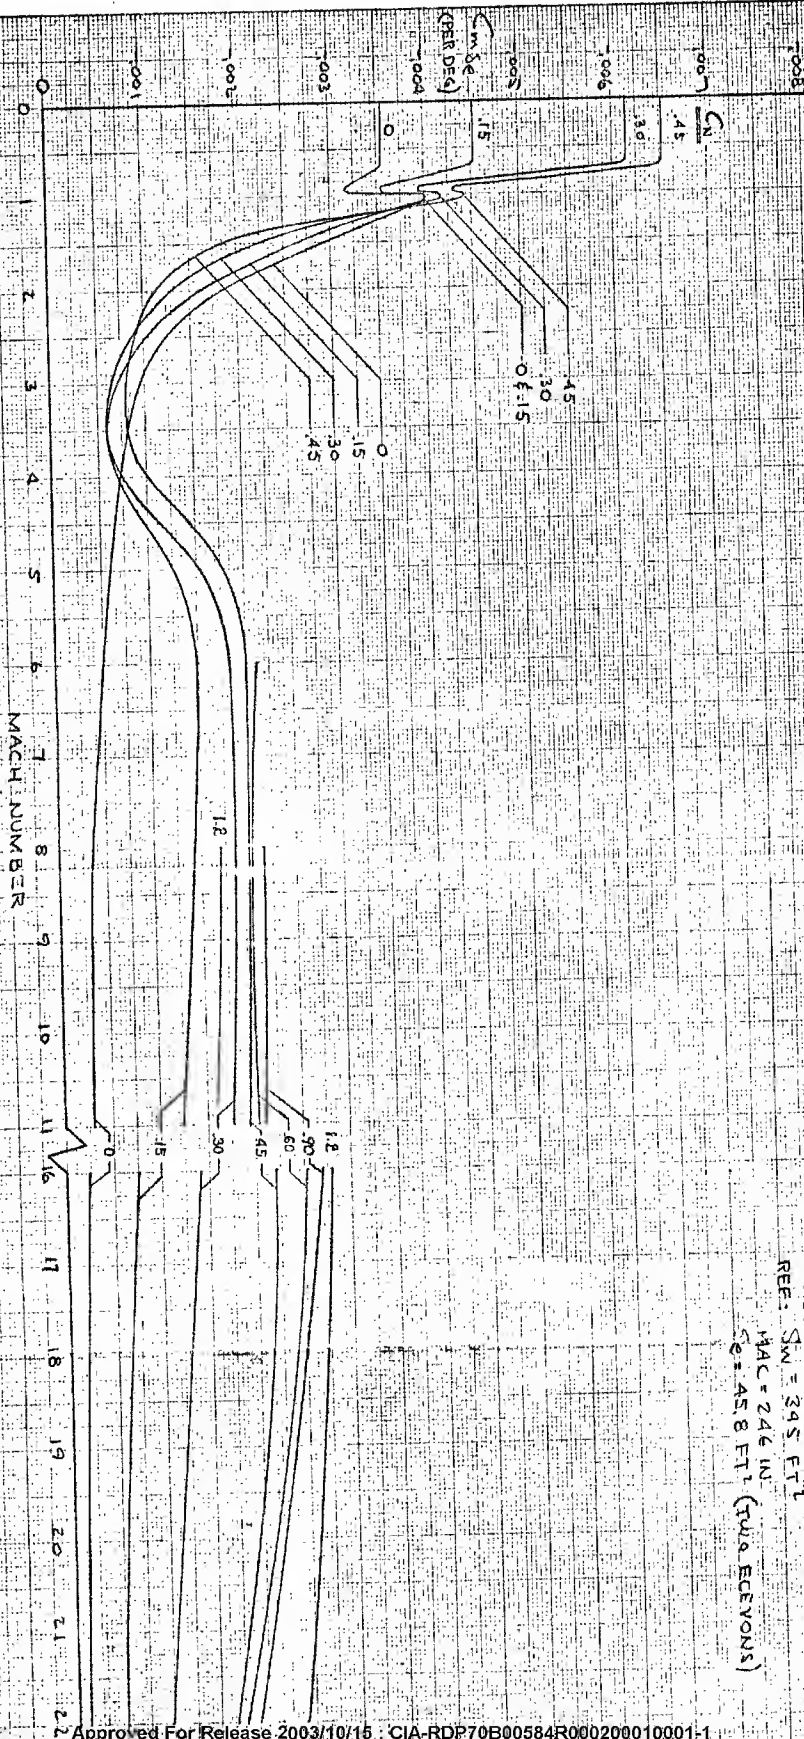

Approved For Release 2003/10/15 : CIA-RDP70B00584R000200010001-1

F16, 6.5

FILE VON EFFECTIVENESS

CALC	E.P./J.E.	"17/1"	REVISED	DATE
CHECK		G.D.A.	10-16-1	
APRD				
APRD				

ELEVON EFFECTIVENESS

844-
-206ED

DZ-80065	PAGE
	67

CONFIDENTIAL

CONFIDENTIAL

117 4041 70000

CONFIDENTIAL

③ **Training needs**

CONFIDENTIAL

6.1.1 LANDING SPEED

Longitudinal stability and elevon effectiveness plots are presented in Figures 6.6 for the glider at a Mach number typical of landing speed. The trimmed normal force coefficients available at any angle of attack at landing speed are shown in Figure 6.7. These data were determined from test 685 in the Boeing Transonic Wind Tunnel and modified to the revision D configuration through the application of data from Boeing Transonic test 682.

The change in stability and control effectiveness with landing gear extended in the presence of a ground plane is shown in Figure 6.6. This effect was determined from wind tunnel tests in the Boeing Transonic Wind Tunnel on a similar configuration and this data was used to estimate the effect for the present configuration.

12-20-1

US 4070 7000 REV. 3/61

CONFIDENTIAL

BOEING

NO. DZ-80065

PAGE 6.8

2-1100

DYNA SOAR

CONFIDENTIAL

MODEL 844-2050D

$M=0.26$

RIGID

$\delta_r = -6/46$

LANDING GEAR DOWN
IN PRESENCE OF
GROUND PLANE

REF: $S_W = 345 \text{ FT}^2$
 $MAC = 246 \text{ IN}$

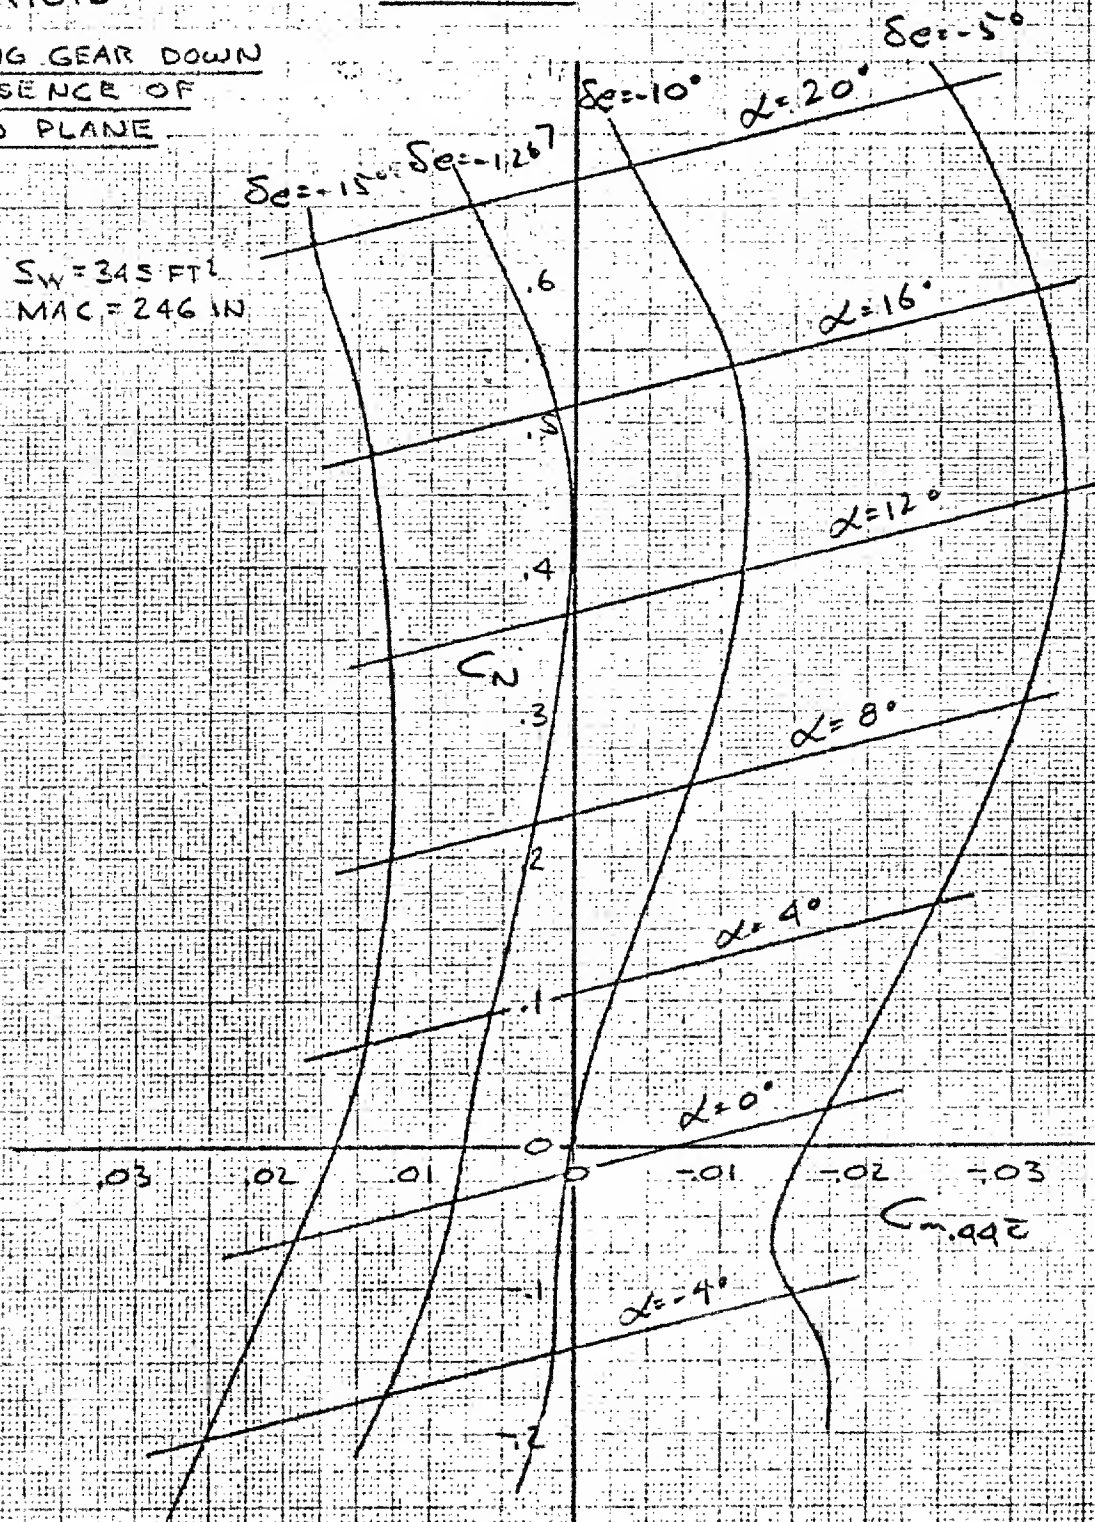


FIG. C.6

CALC	EJH	11/7/11	REVISED	DATE	LONGITUDINAL STABILITY	844-2050D
CHECK			12-20-1		M=0.26	
APR					LANDING GEAR DOWN IN PRESENCE OF GROUND PLANE	D2-80065
APR					BOEING AIRPLANE COMPANY	PAGE 69


CONFIDENTIAL

ALUMINUM 100L
TRADE PAPER

40629

DYNA SOAR
MODEL 844-20500

RIGID
LANDING SPEED
SR = -6/46

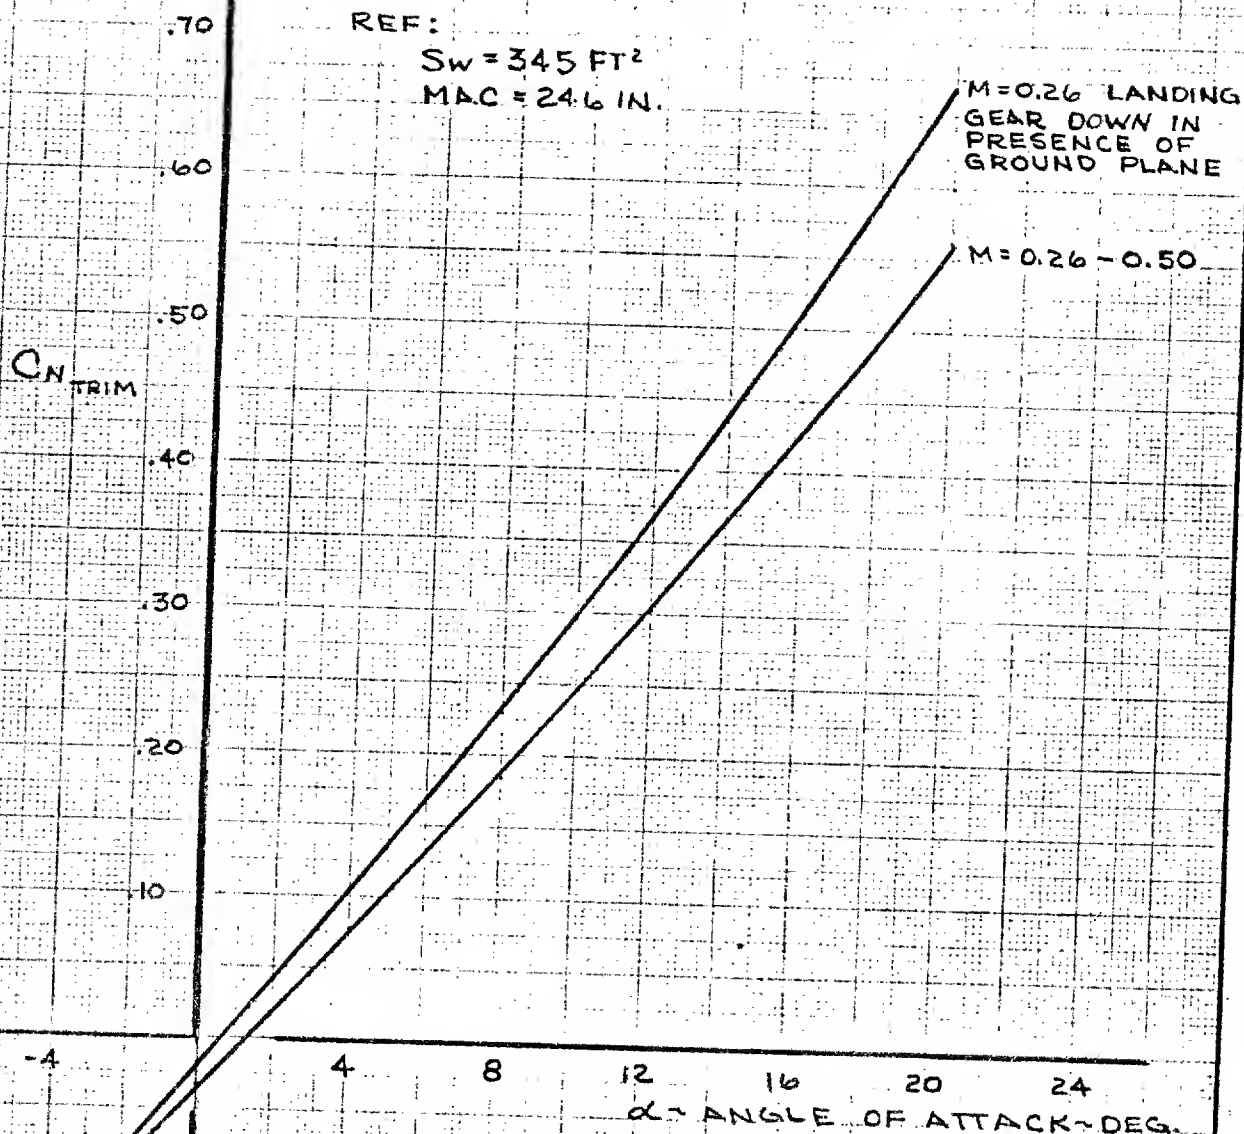

CALC	CLAAR	12-18-1	REVISED	DATE	<p>TRIMMED NORMAL FORCE LANDING SPEED</p> <p>THE BOEING COMPANY</p>	FIG. 6.7
CHECK						844-20500
APR						DZ-80065
APR						PAGE 6.10

CONFIDENTIAL

6.1.2 SUBSONIC - TRANSONIC SPEED

The longitudinal static stability and control effectiveness characteristics for the model 844-2050 revision D glider are shown in Figures 6.8 through 6.12, for the subsonic - transonic speed range. The corresponding trimmed normal force coefficients available at any angle of attack are shown in Figure 6.17. The data are based on Boeing Transonic Wind Tunnel tests 672 and 685 and modified by data from Boeing Transonic test 682.

CONFIDENTIAL

BOEING

NO. D2-80065

$M=0.26-0.50$

$S_{11}=6/16$

DYNA SOAR

MODEL 844-2050D

RIGID

REF. SW. 245 FT.
WAVE 226 IN

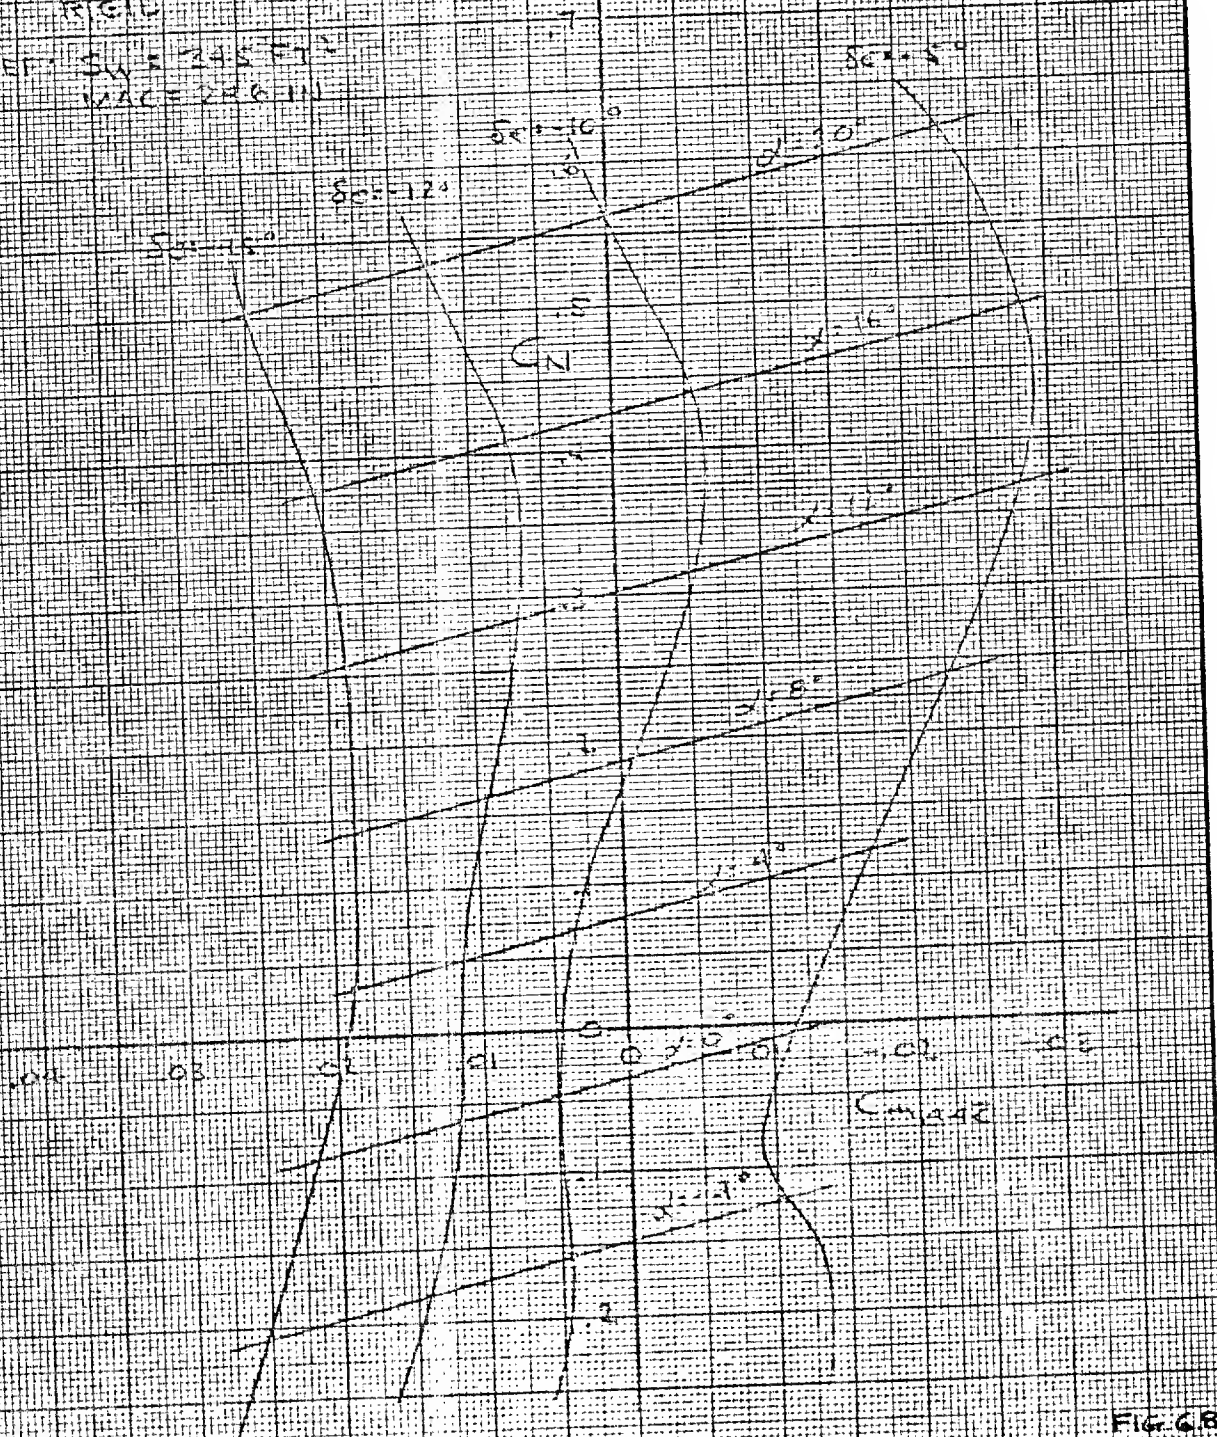


FIG. 6B

CALC	EJH	11/1/61	REVISED	DATE
CHECK			12/20/61	
APR				
APR				

LONGITUDINAL STABILITY
 $M=0.26-0.50$

THE BOEING COMPANY

844-
2050D

PAGE
6.12

86

~~CONFIDENTIAL~~

M=0.80

DYNA SOAR

81-6/16

MODEL 844-2050D

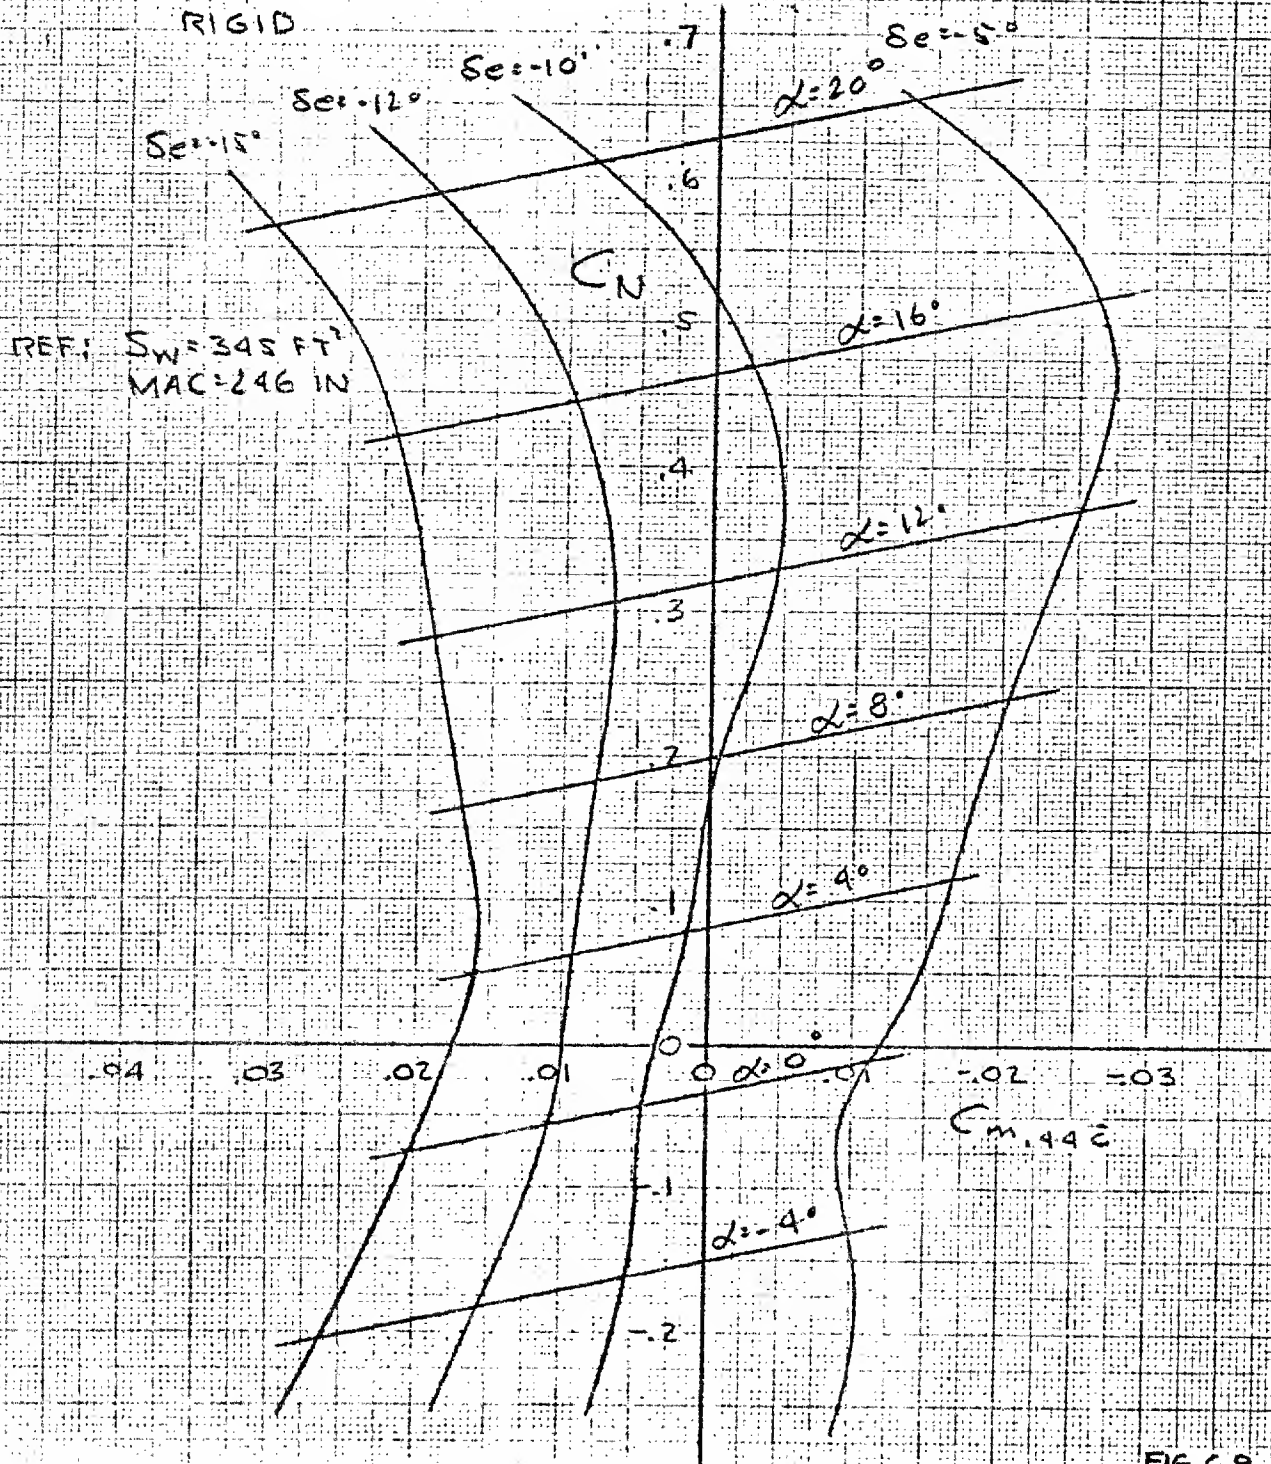


FIG. C.9

CALC	EJH	11/3/1	REVISED	DATE	LONGITUDINAL STABILITY	844-
CHECK					M=0.80	2050D
APR						02-80065
APR					BOEING AIRPLANE COMPANY	PAGE
						6.13

~~CONFIDENTIAL~~

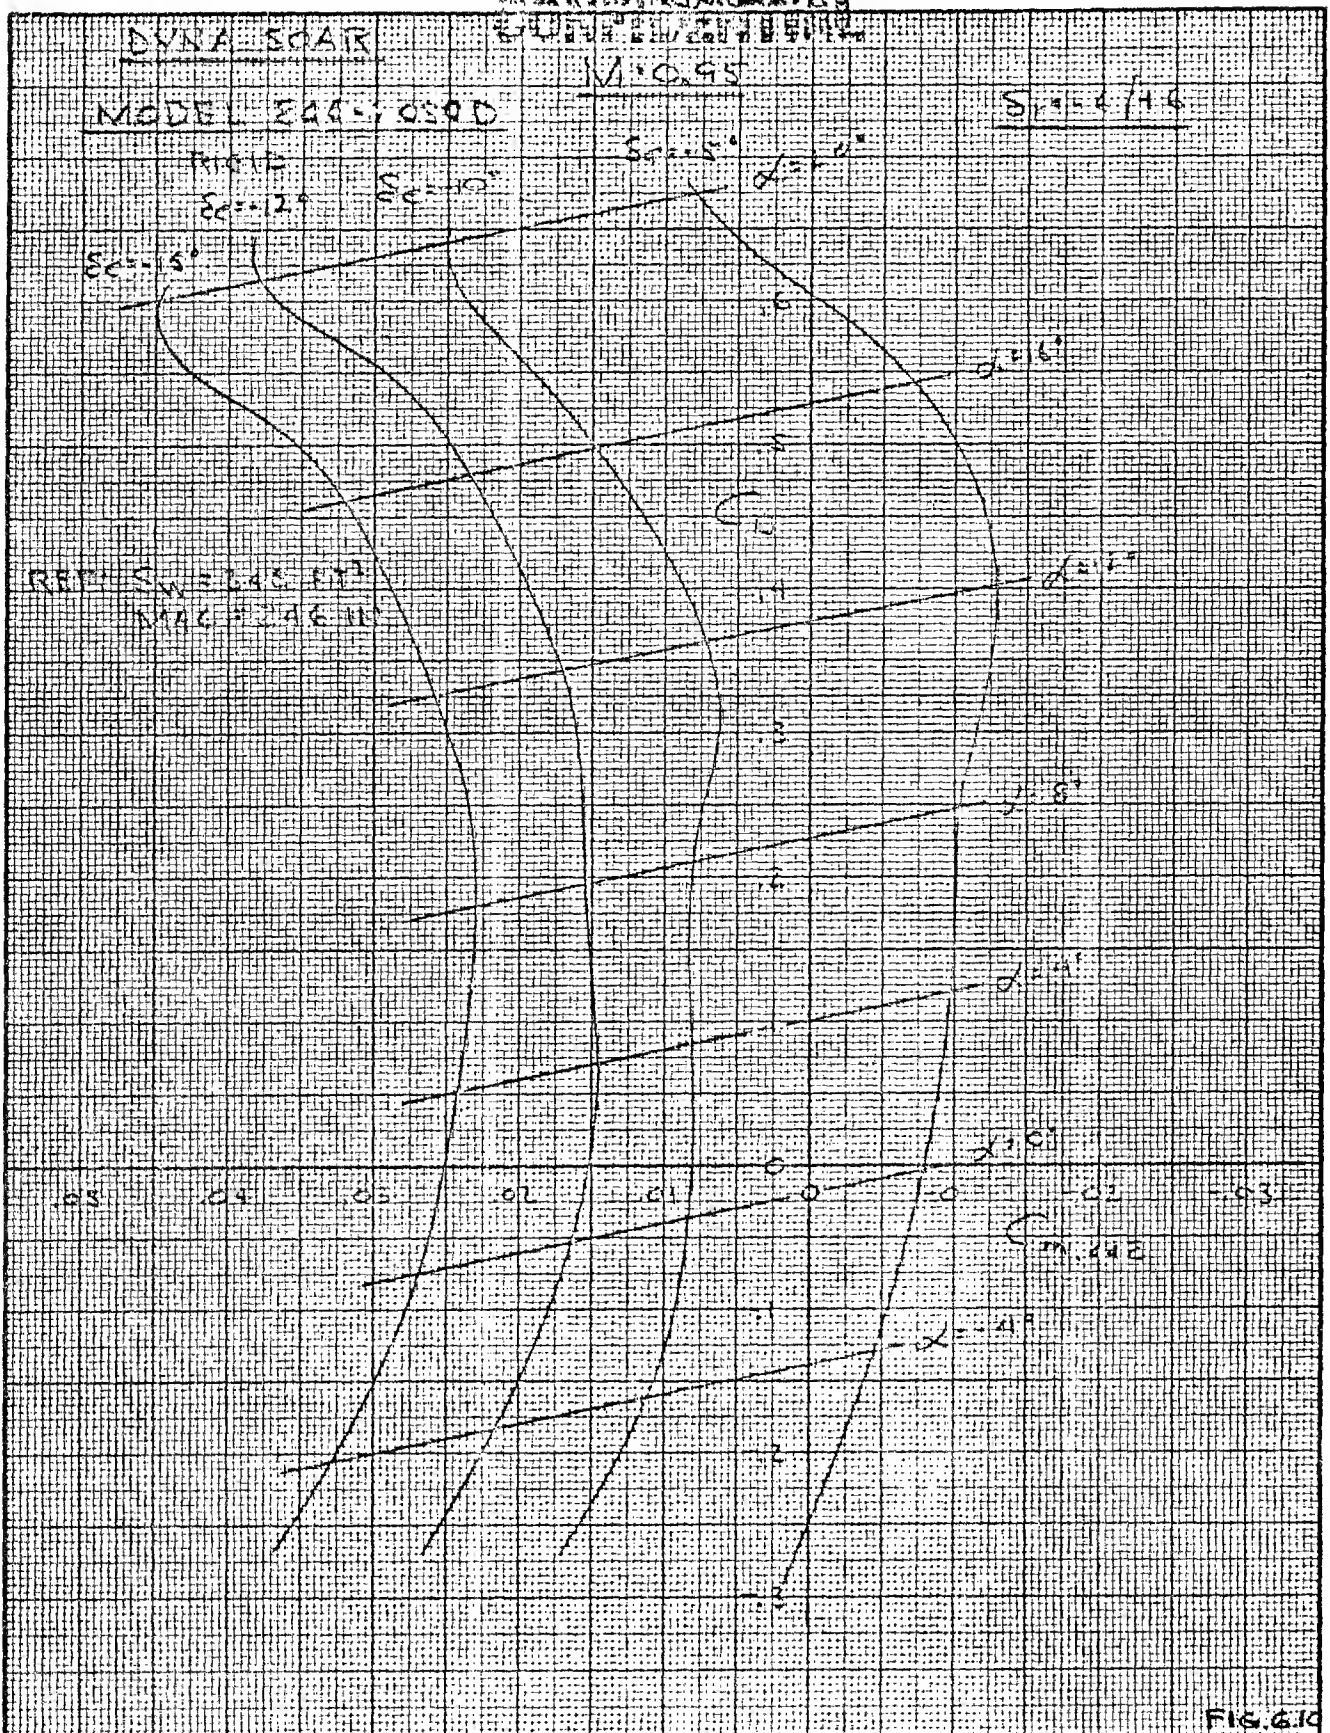


FIG. 6.10

CALC	EJM	11/3/1	REVISED	DATE	LONGITUDINAL STABILITY	844-
CHECK					M=0.95	2050D
APR						
APR					THE BOEING COMPANY	PAGE
						6.14

W.B. V. 6.1

88

CONFIDENTIAL

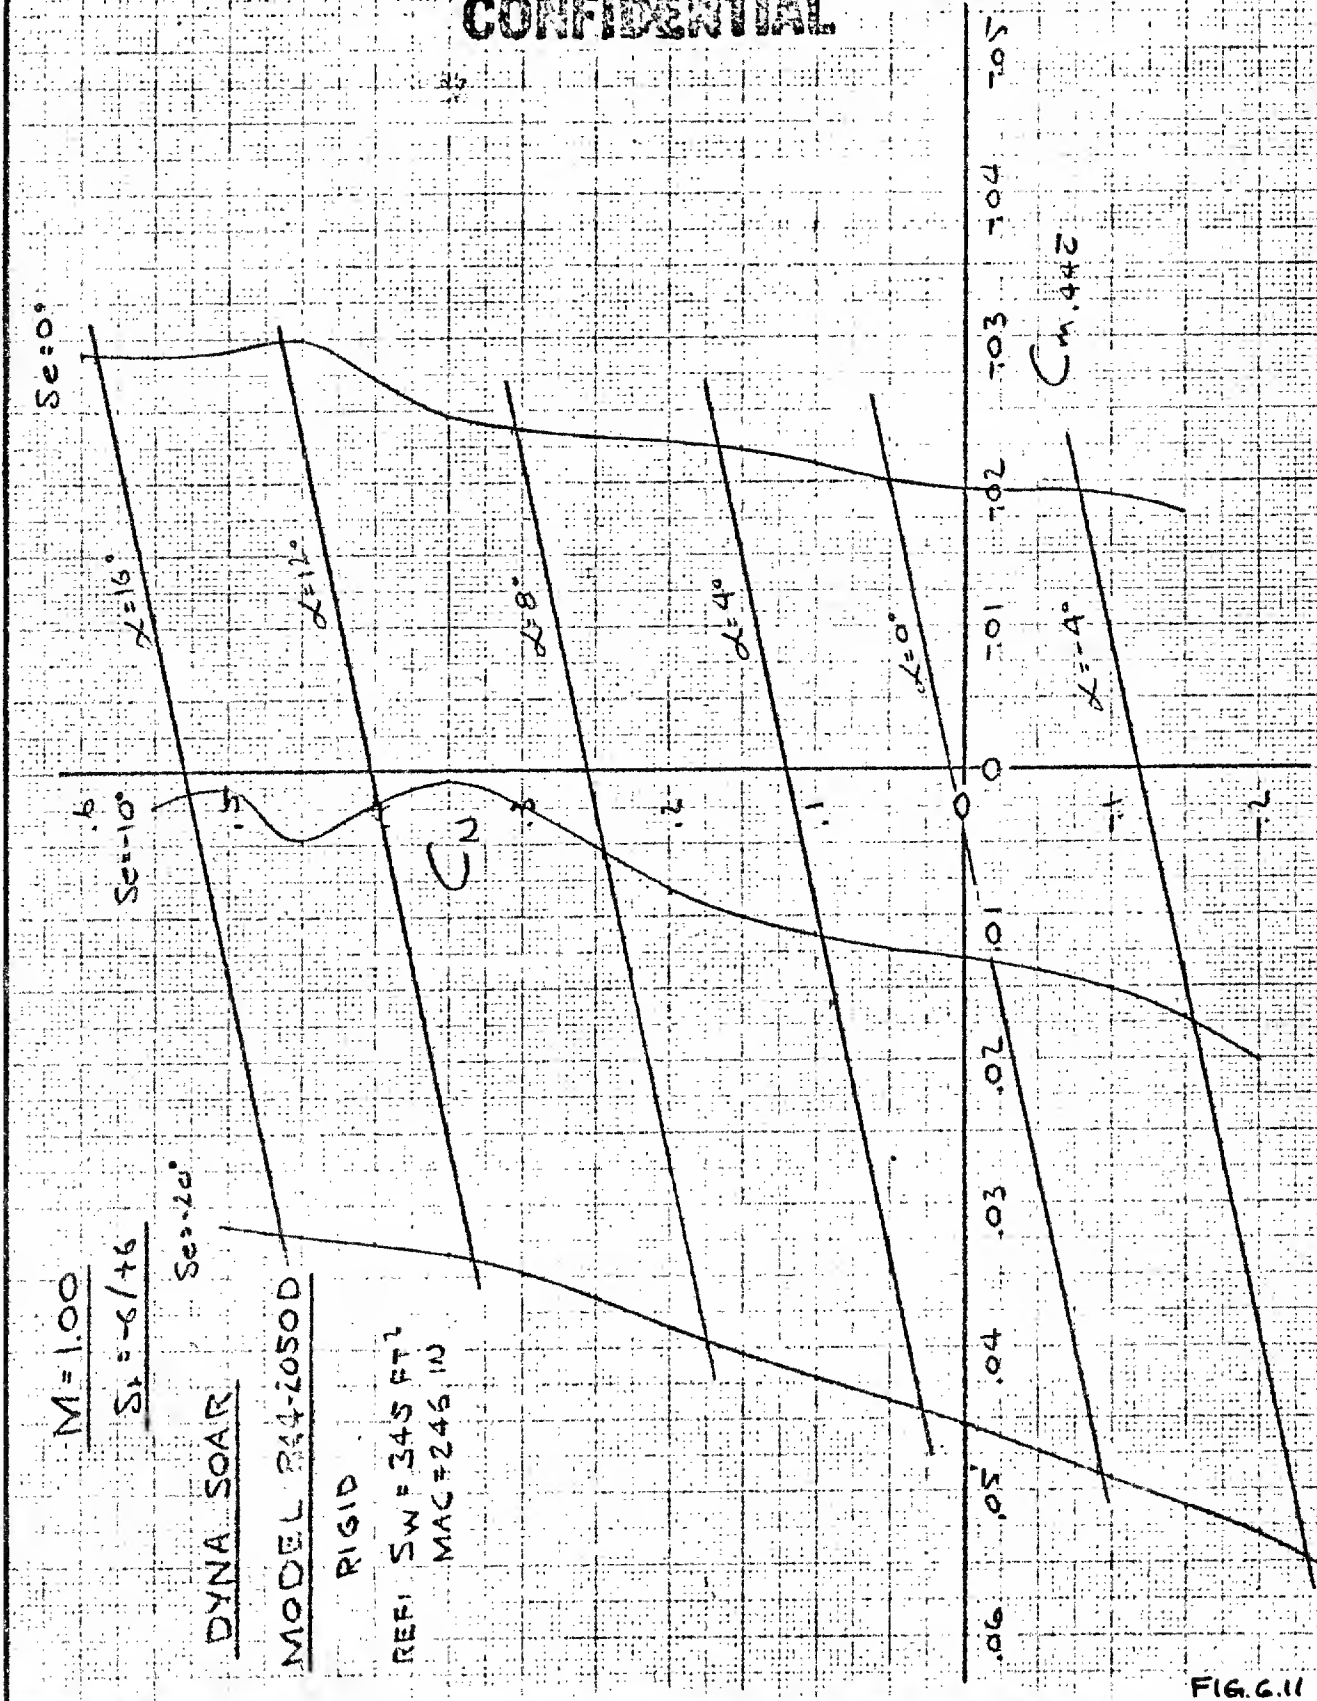


FIG. 6.11

CALC	EJ-M	11/8/1	REVISED	DATE	LONGITUDINAL STABILITY	844-2050D
CHECK					M=1.00	
APR						02-80065
APR						PAGE 6.15

THE BOEING COMPANY

CONFIDENTIAL

CONFIDENTIAL

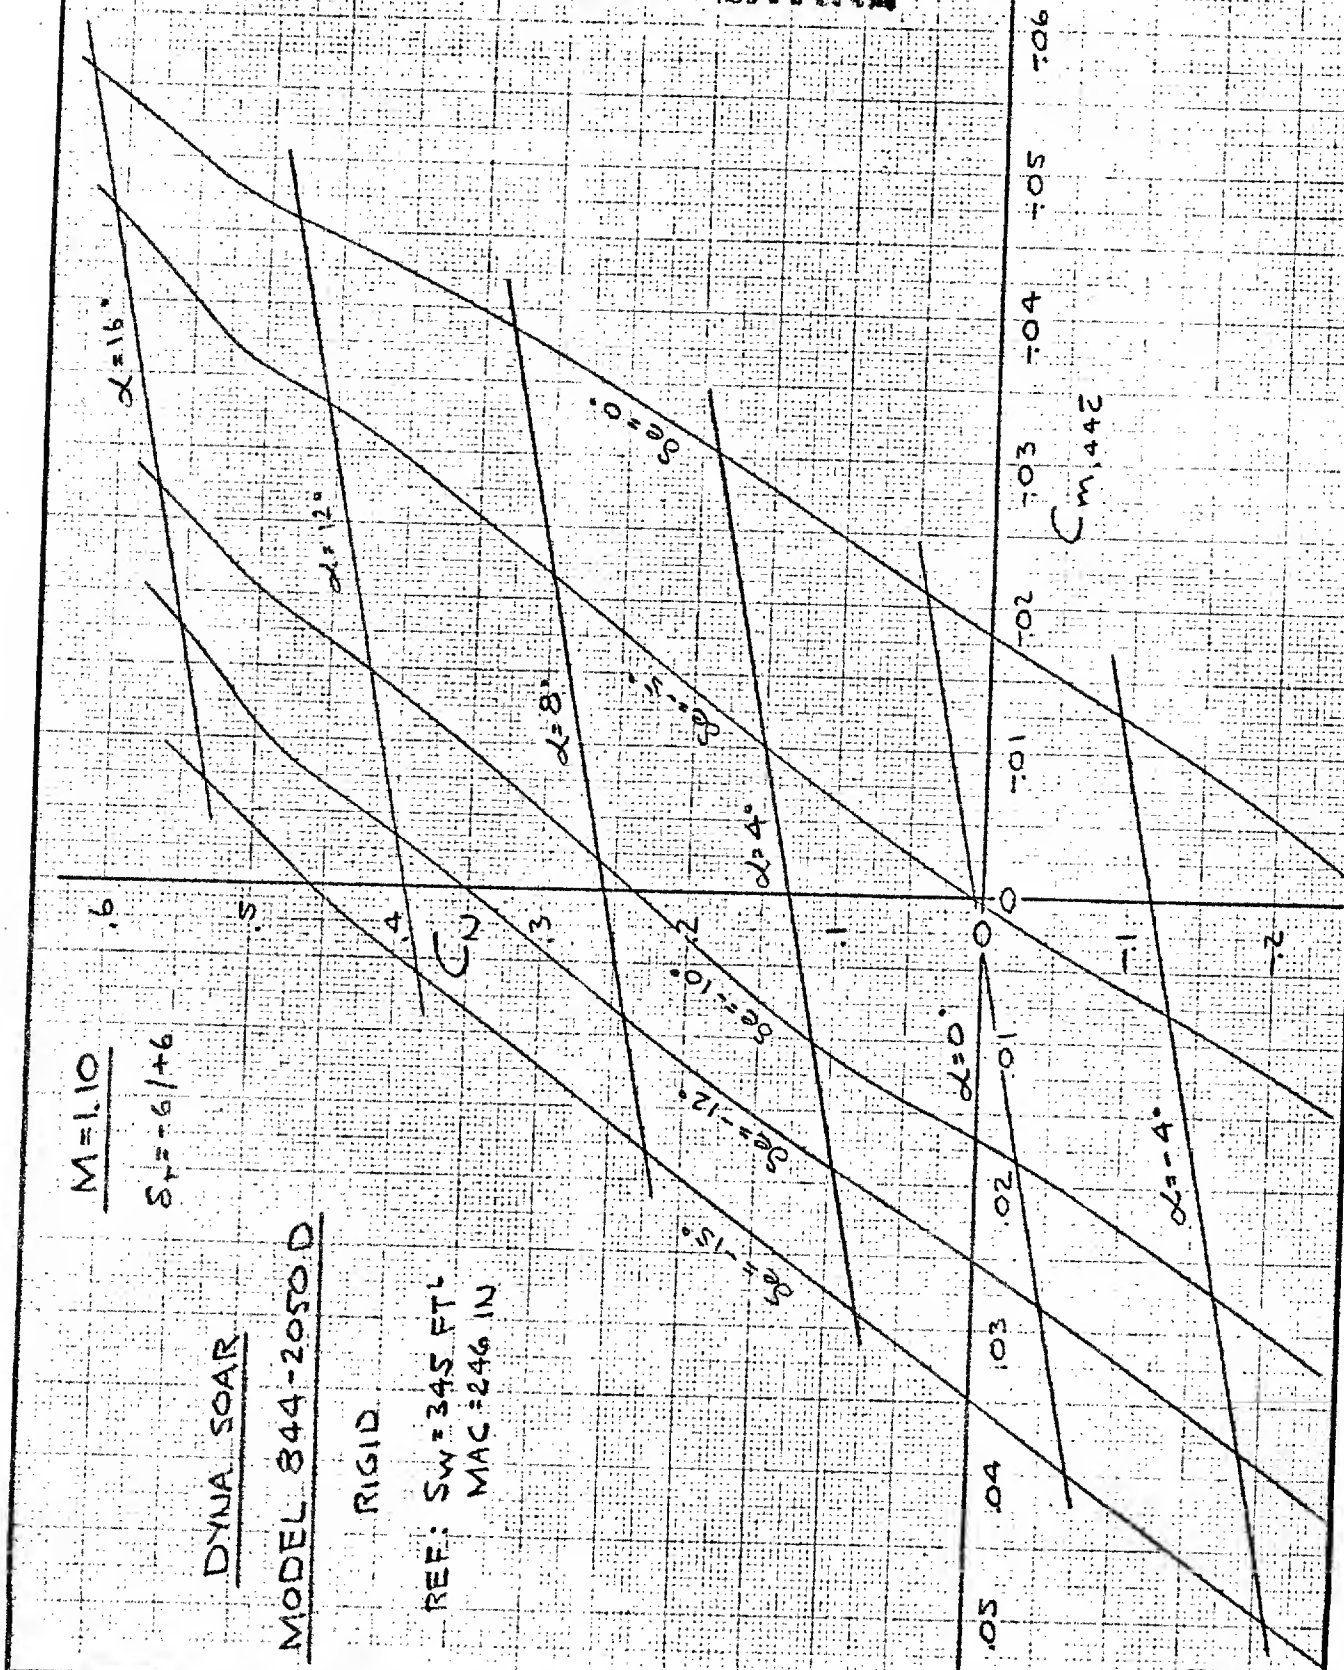


FIG. C.12

CALC	EJH	11/2/1	REVISED	DATE
CHECK				
APR				
APR				

LONGITUDINAL STABILITY
 $M=1.10$

844-2050D

02-80065

PAGE

THE BOEING COMPANY

CONFIDENTIAL

CONFIDENTIAL
DYNA SOAR

MODEL 844-2050D

RIGID

REF: $S_w = 345 \text{ FT}^2$
 $MAC = 246 \text{ IN}$

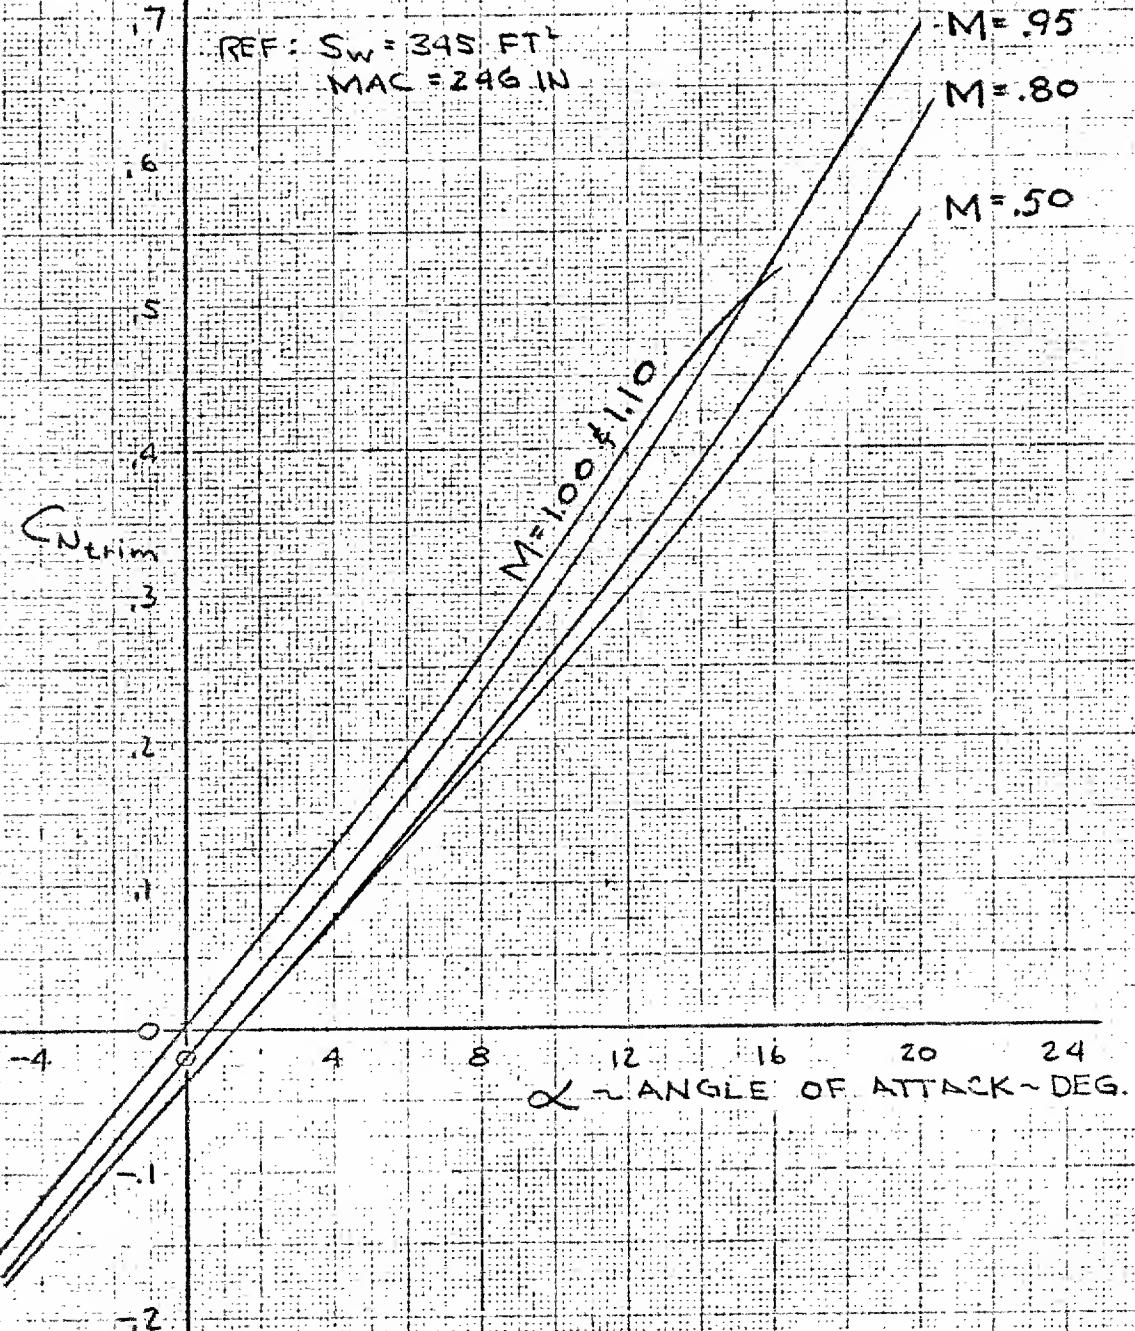


FIG. G.13

CALC	EJH	11/9/61	REVISED	DATE	TRIMMED NORMAL FORCE	844-2050D
CHECK			2-5-61		SUBSONIC - TRANSONIC	02-80065
APR						PAGE
APR					THE BOEING COMPANY	6.17
Approved For Release 2003/10/15 : CIA-RDP70B00584R000200010001-1						

W.B.V.B.E.

CONFIDENTIAL

6.1.3 SUPERSONIC SPEED

The longitudinal static stability and control characteristics for the model 844-2050 revision D glider configuration are shown in Figures 6.14 through 6.16 for supersonic speeds. The corresponding normal force coefficients available at any angle of attack are shown in Figure 6.17. These data are based on Boeing Supersonic Wind Tunnel tests 105 and 113.

CONFIDENTIAL

CONFIDENTIAL

$M=1.4$


$\delta P = -6/16$

DATA SOAR

MODEL B44-2050D

RIGID

REF: SW = 345 F1
MAC = 246 IU

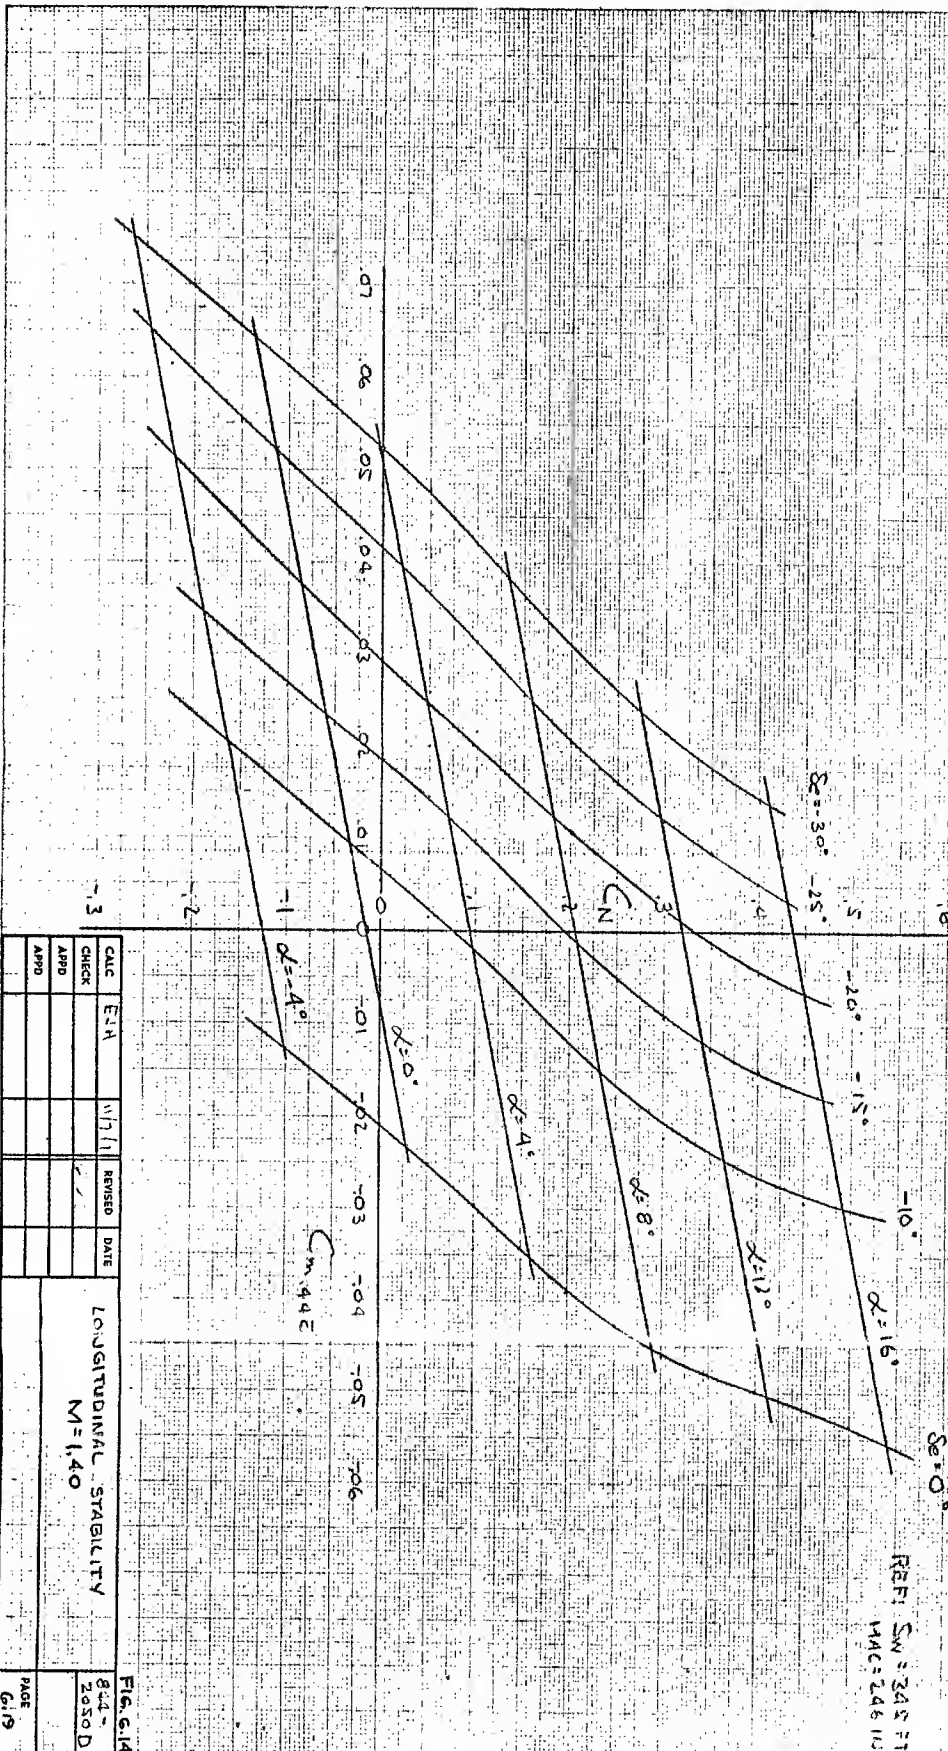

CONFIDENTIAL


US 4041 7000

CONFIDENTIAL

REMARKS 100

54370

CONFIDENTIAL

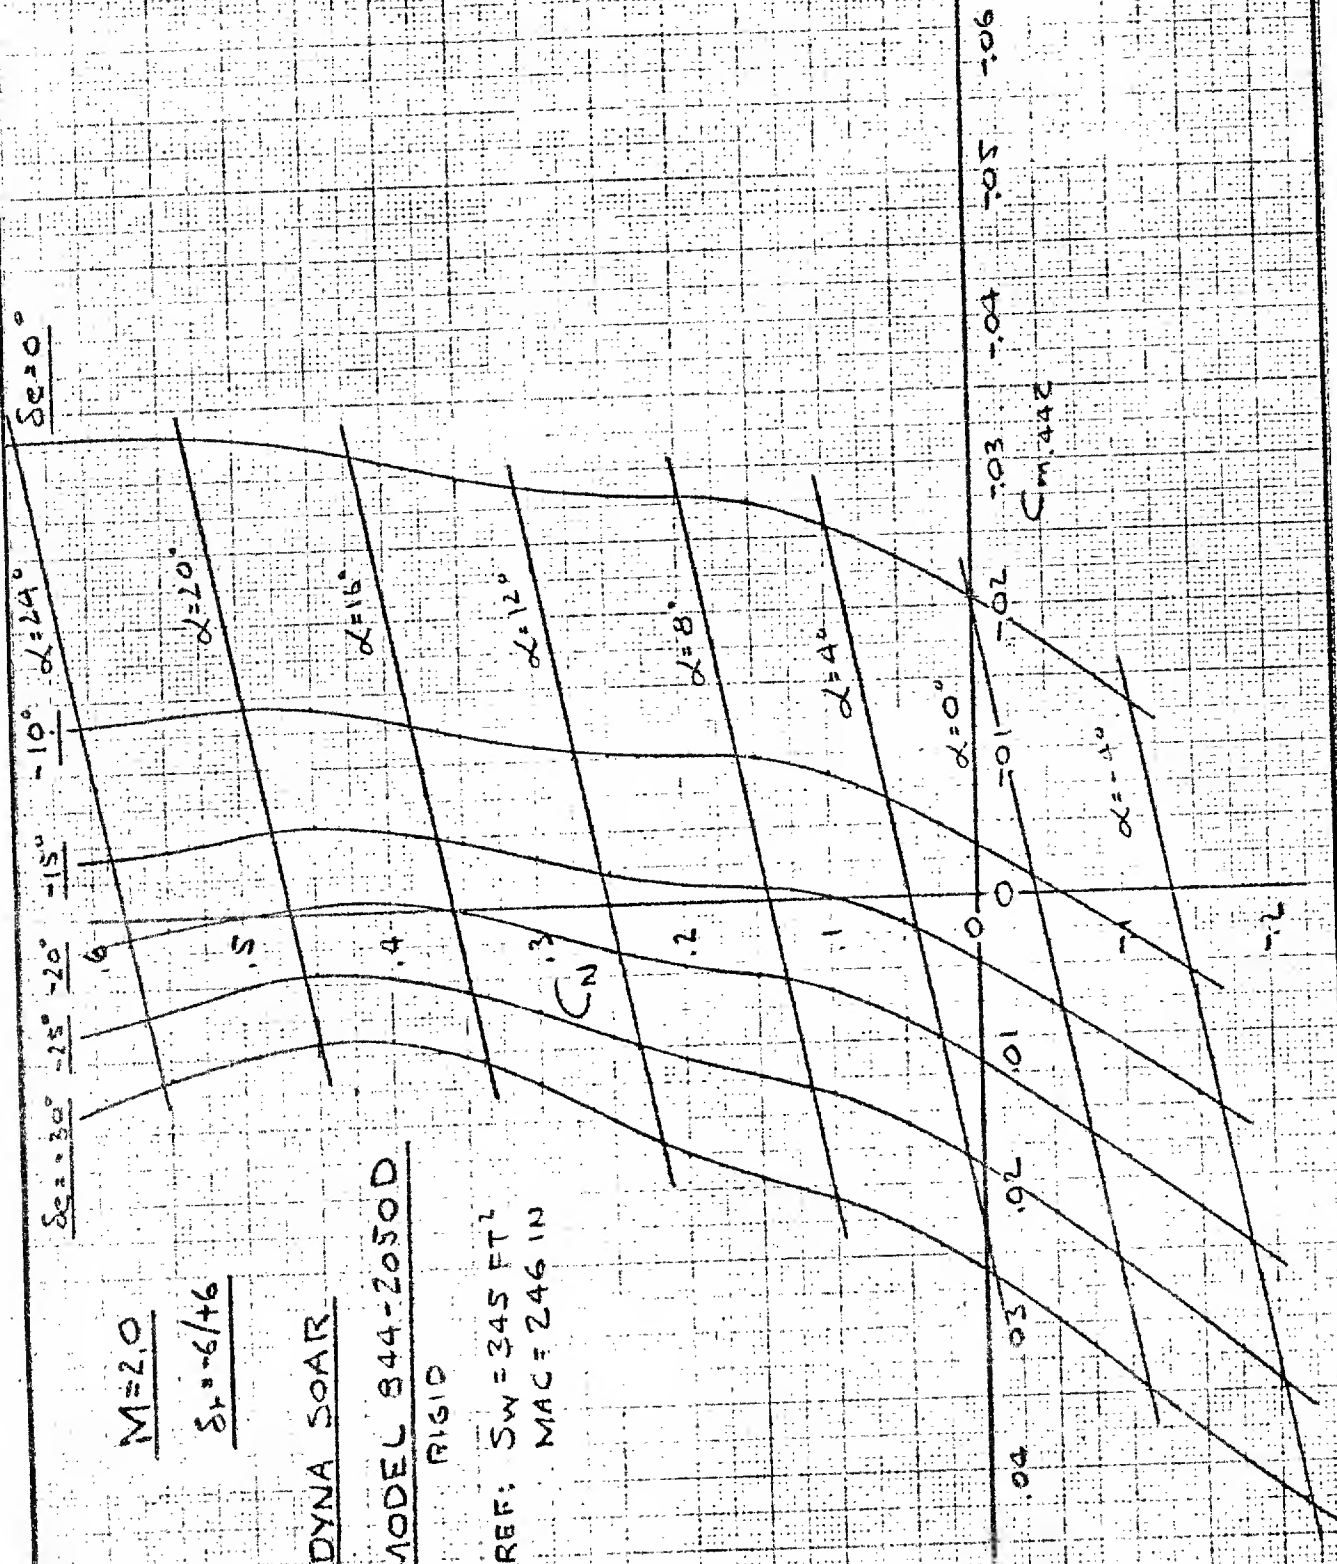

$M=2.0$

$S_{ref}=616$

DYNA SOAR

MODEL 844-2050D

RIGID

REF: SW = 345 FT²

MAC = 246 IN

FIG. 6.15

CALC	EJH	11/7/1	REVISED	DATE	LONGITUDINAL STABILITY $M=2.0$	844-2050D
CHECK			12/2/1			02-80065
APR					THE BOEING COMPANY	PAGE
APR						6.20

CONFIDENTIAL

W1544807

94

CONFIDENTIAL

$M=3.50$

$\delta_t = 0/0$

DYNA SOAR

MODEL 844-2050D

RIGID

REF: $SW = 345 \text{ FT}^2$
 $MAC = 246 \text{ IN}$

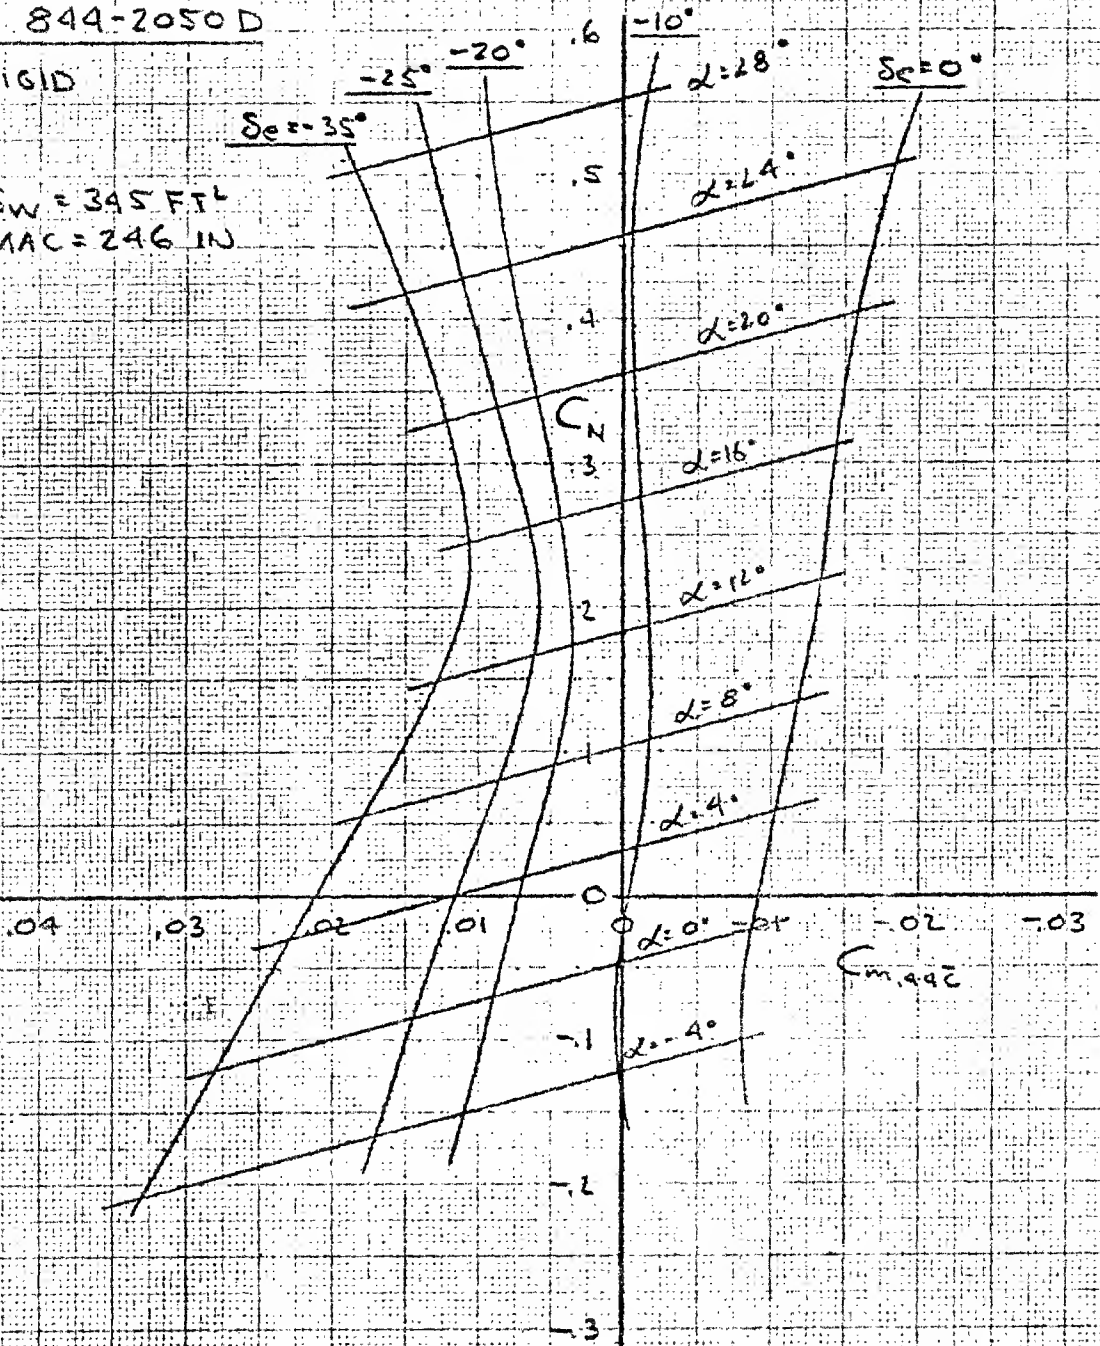


FIG. C.16

CALC	EJH	11/24/61	REVISED	DATE	LONGITUDINAL STABILITY $M=3.50$	844-2050D
CHECK						D2-80065
APR					THE BOEING COMPANY	PAGE
APR						G, 21

CONFIDENTIAL

CONFIDENTIAL

DYNA SOAR

MODEL 844-2050D

RIGID

REF: $S_W = 345 \text{ FT}^2$
 $MAC = 246 \text{ IN}$

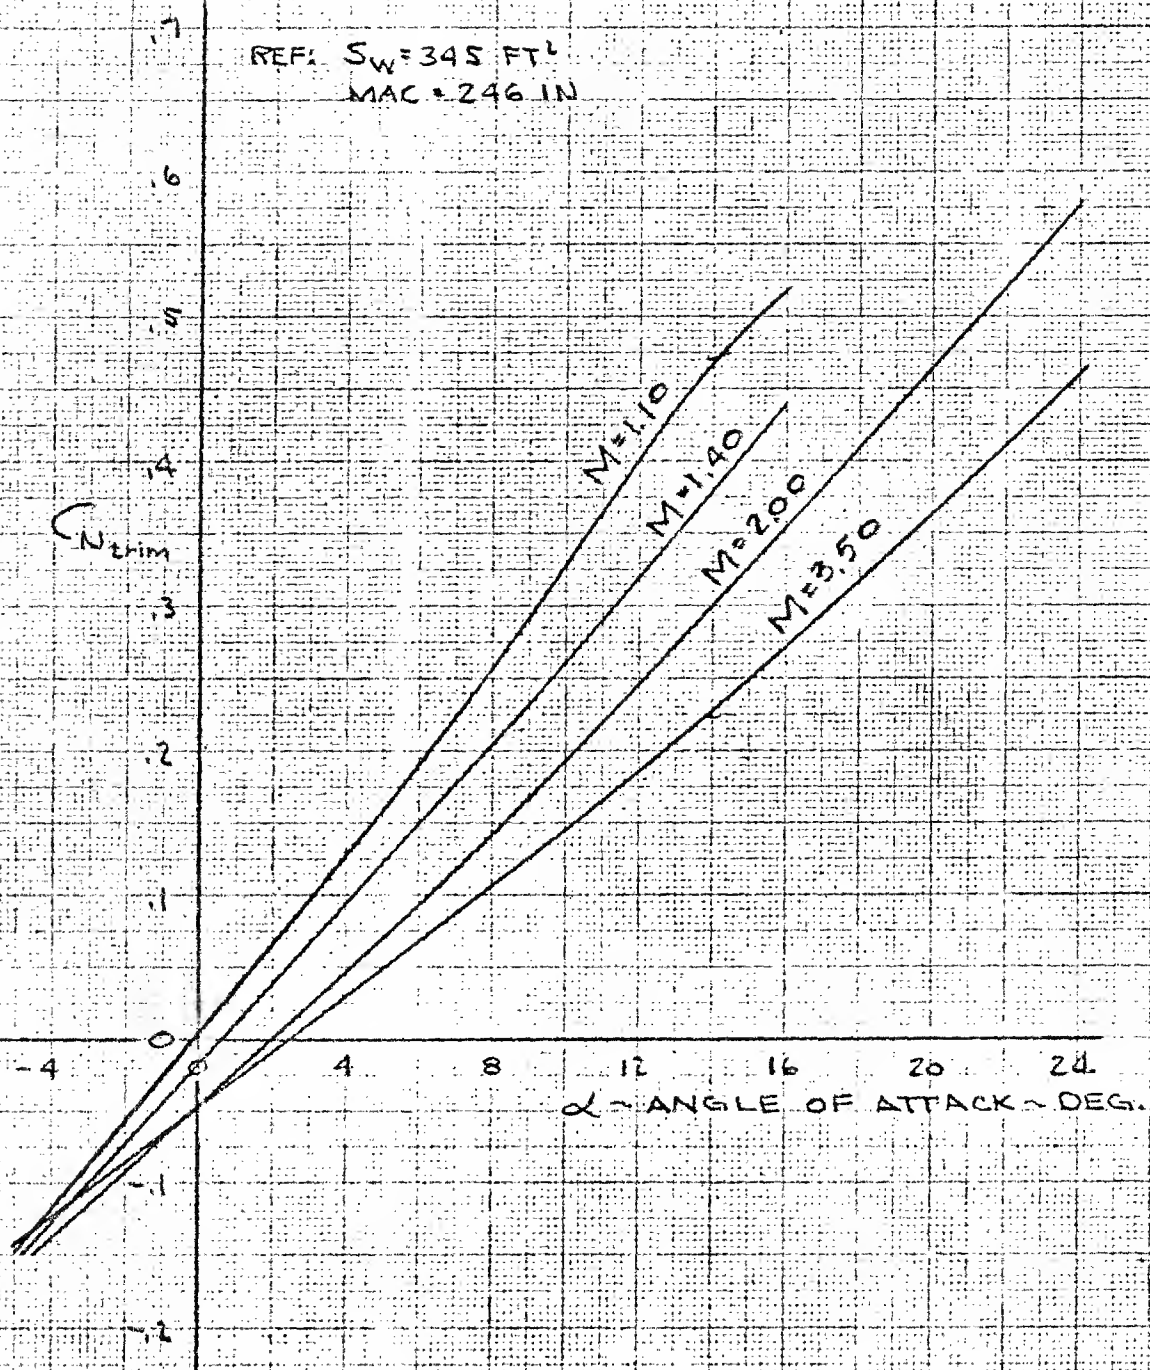


FIG. 6.17

CALC	EJH	4/7/61	REVISED	DATE	TRIMMED NORMAL FORCE SUPERSONIC	844- 2050D
CHECK			1/20/61			
APR						02-80065
APR					THE BOEING COMPANY	PAGE 6.22

W.B. V6E7

96

CONFIDENTIAL

CONFIDENTIAL**6.1.4 HYPERSONIC SPEED**

Longitudinal static stability and control characteristics for model 844-2050 D glider configuration are shown in Figures 6.18 through 6.62 for hypersonic speeds. Curves of longitudinal stability, longitudinal aerodynamic center, trim requirements, trimmed normal force and control effectiveness are shown at individual Mach numbers of 6, 8, 9, 11, 16 and 22 with two Reynolds numbers considered at a Mach number of 9. Figures are based on modified test data obtained at Jet Propulsion Laboratory 21" Hypersonic Wind Tunnel (M = 6, 9, 11), Arnold Center Tunnel B (M = 8) and Boeing Hot Shot Wind Tunnel (M = 16, 22). Theoretical corrections to test data have been made at low angles of attack to account for configuration modifications consisting of an upper aft body flare and a thicker vertical tail.

Low angle of attack data ($\alpha \leq 20^\circ$) at M = 6, 9, 11 and high angle of attack data ($\alpha > 20^\circ$) at M = 16, 22 have been extrapolated on the basis of M = 8 data, previous wind tunnel tests of similar configurations and theoretical estimates.

Basic hypersonic test models were thermally deformed configurations ("hot shape") which had a 4 degree nose inclination as opposed to the cold 3 degree shape. Figures for both "hot" and "cold" configurations are shown for Mach numbers of 6, 8, and 9 with only "hot shape" shown for higher Mach numbers.

The continuous flow facilities at Mach numbers of 11 and below are capable of matching flight conditions and yield consistent data. At high Mach numbers "hot shot" data show a much higher degree of scatter. While the "hot shot" test conditions cannot duplicate flight enthalpy and slight conical nozzle effects are present, these deviations are negligible on stability and control characteristics in comparison to data scatter.

In the rarefied gas regime, curves are presented at intermediate altitudes between the "cold shape" continuum flow values at 250,000 feet and the free molecule values at 500,000 feet. These data are assumed to apply in the speed regime above 20,000 feet per second. The data shown at 250,000 feet altitude are from test data in the Boeing Hot Shot tunnel at a Mach number of 22. Free molecular flow was assumed to exist at 500,000 feet altitude. Full momentum transfer of the particles was assumed. The effect of re-emission was considered to be negligible. At intermediate altitudes the Knudsen number, which may be considered a similarity number for rarefied flows, was used to establish a rational interpolation. The free molecule values of pitching moment and normal force were approached as the Knudsen number became large. The incremental modification to the "cold shape" continuum data was obtained in the following manner;

17-20-1

U3 4070 7000 REV. 5/61

CONFIDENTIAL**BOEING**

NO. D2-80065

CONFIDENTIAL

6.1.4 HYPERSONIC SPEED (Cont'd)

$$\frac{K}{K+1} (\Delta C_M)_{\text{CONT-FM}} = \Delta C_M$$

$$\frac{K}{K+1} (\Delta C_N)_{\text{CONT-FM}} = \Delta C_N$$

$$\text{WHERE } K = \frac{\lambda}{d}$$

 $\lambda = \text{MEAN FREE PATH}$

$$d = \bar{c} \sin \alpha \quad \alpha \geq 15^\circ$$

$$d = \bar{c}_w \quad \alpha < 15^\circ$$

 $\bar{c} = \text{MEAN AERODYNAMIC CHORD}$
 $\bar{c}_w = \text{WING THICKNESS}$

At altitudes up to 350,000 ft where significant continuum effects may still exist, a decrease in elevon effectiveness was considered. A thickening of the large hypersonic boundary layer as it expands around the upward deflected elevon will decrease the effective angle of expansion. By use of a computer program which numerically integrates the boundary layer equations, References 1 & 2, momentum thicknesses were obtained before and after the expansion. Loss in effectiveness was then obtained from the effective angle of expansion along the chord of the elevon in the form of $\frac{d\delta^*}{dx}$. Additional analytical and experimental work is continuing in this region of rarefied gas dynamics.

12-20-1

U3 4070 7000 REV. 3/61

CONFIDENTIAL**BOEING**

NO. D2-80065

Approved For Release 2003/10/15 : CIA-RDP70B00584R000200010001-1

PAGE 8124

2-5100

CONFIDENTIAL

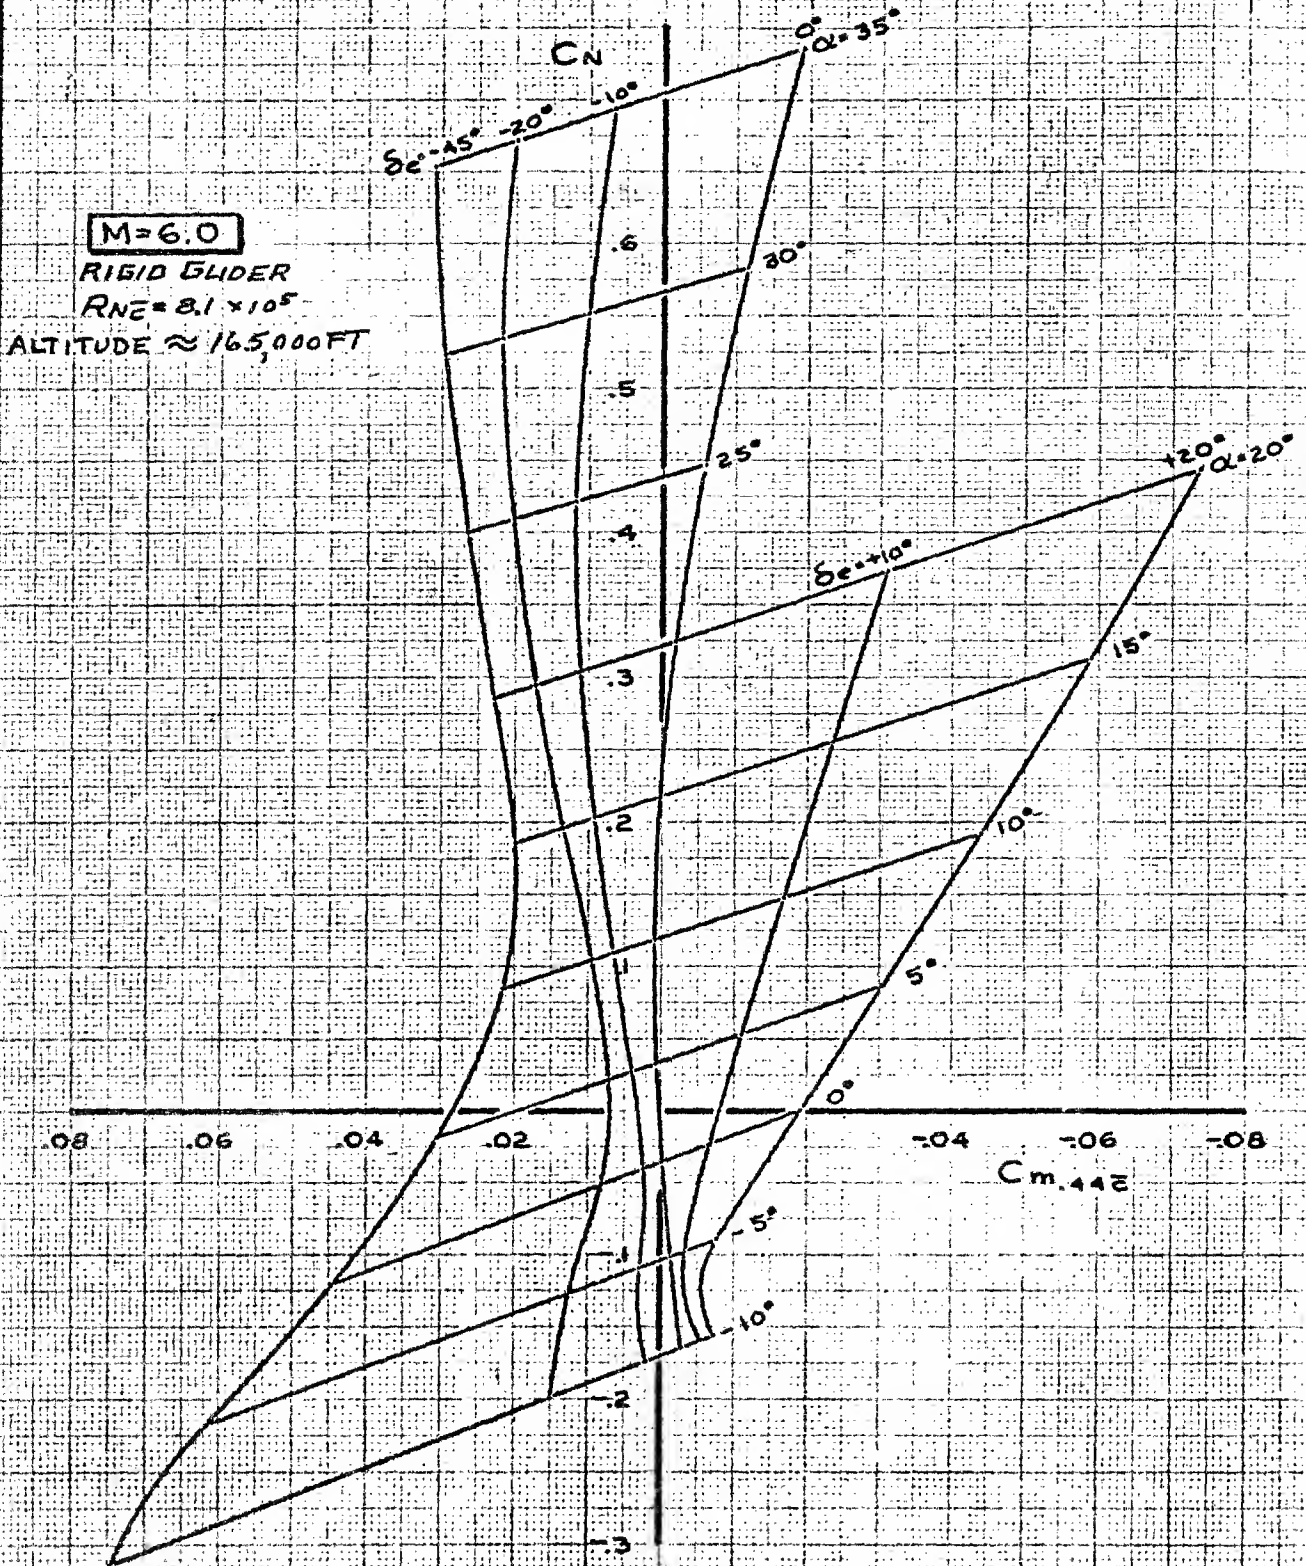


FIG. 6.18

CALC	D. KATZ	11-17-61	REVISED	DATE	HOT SHAPE LONGITUDINAL STABILITY M = 6.0 THE BOEING COMPANY	844- 20500
CHECK			12-5-61			D2-80065
APR						PAGE 6.25
APR						
TRACE	N. M.	11-17-61				

CONFIDENTIAL

$M = 8.08$

RIGID GLIDER

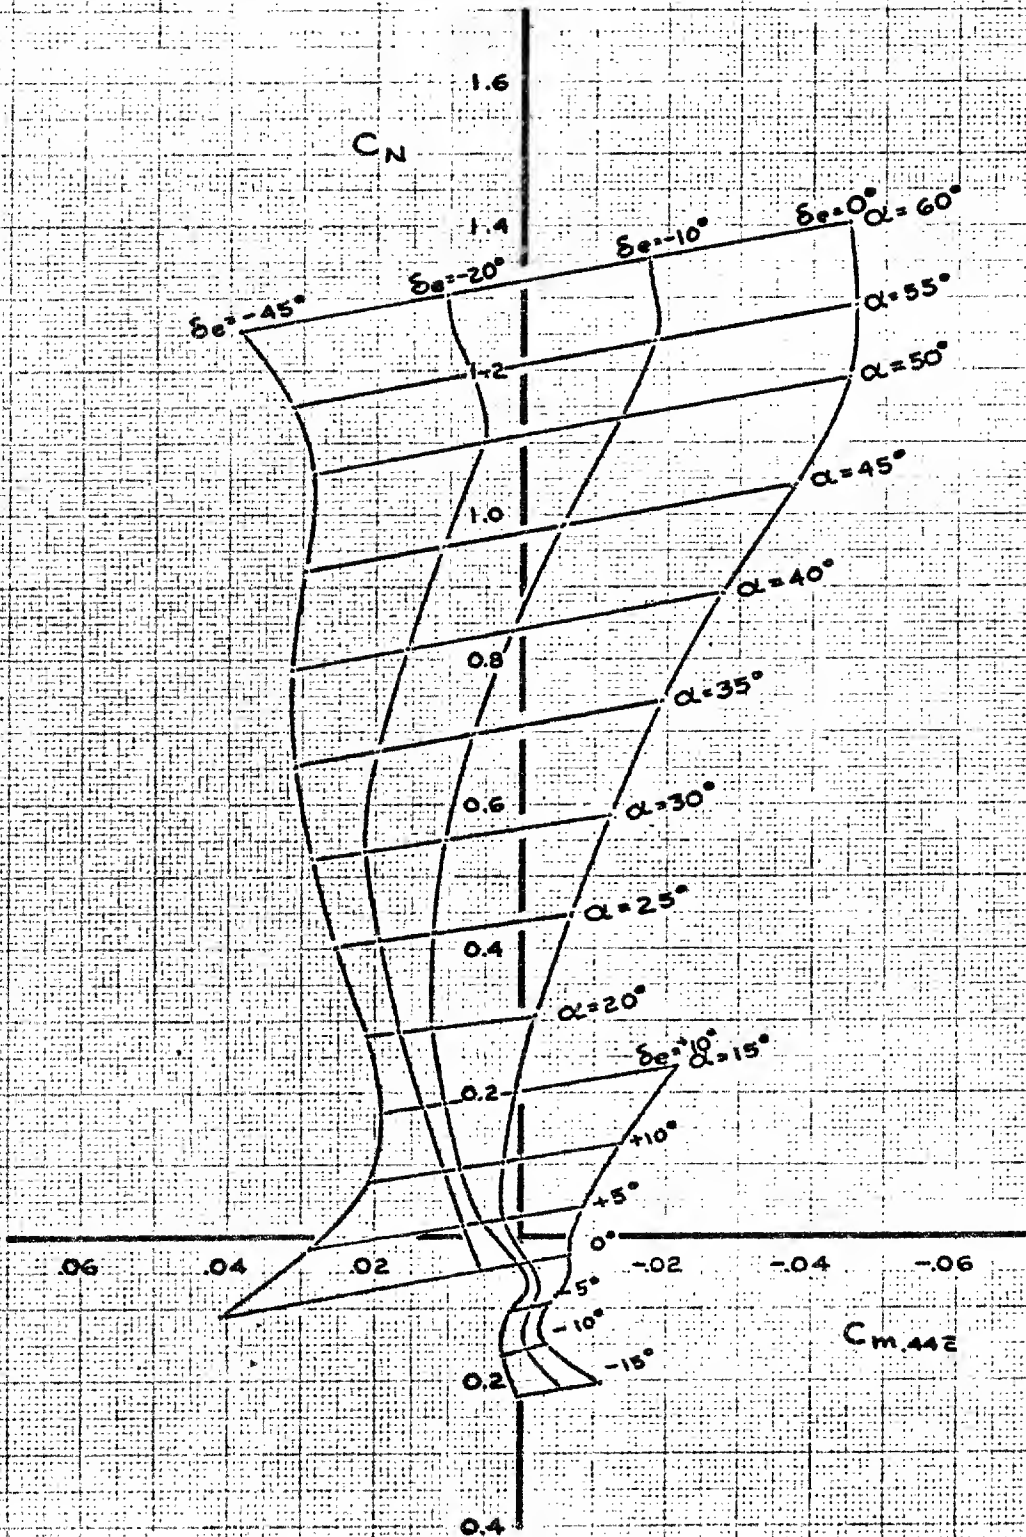


FIG. 6.19

CALC	J.L. FRANCIS	11-2-61	REVISED	DATE
CHECK			2201	
APR				
APR				
DRN	711	11-2-61		

HOT SHAPE
LONGITUDINAL STABILITY
 $M = 8.08$

844-
2050 D
D2-80065

THE BOEING COMPANY

PAGE
626

CONFIDENTIAL

CONFIDENTIAL

M = 9.0

RIGID GLIDER

$RN_z = 4.5 \times 10^5$

ALTITUDE $\approx 195,000$ FT

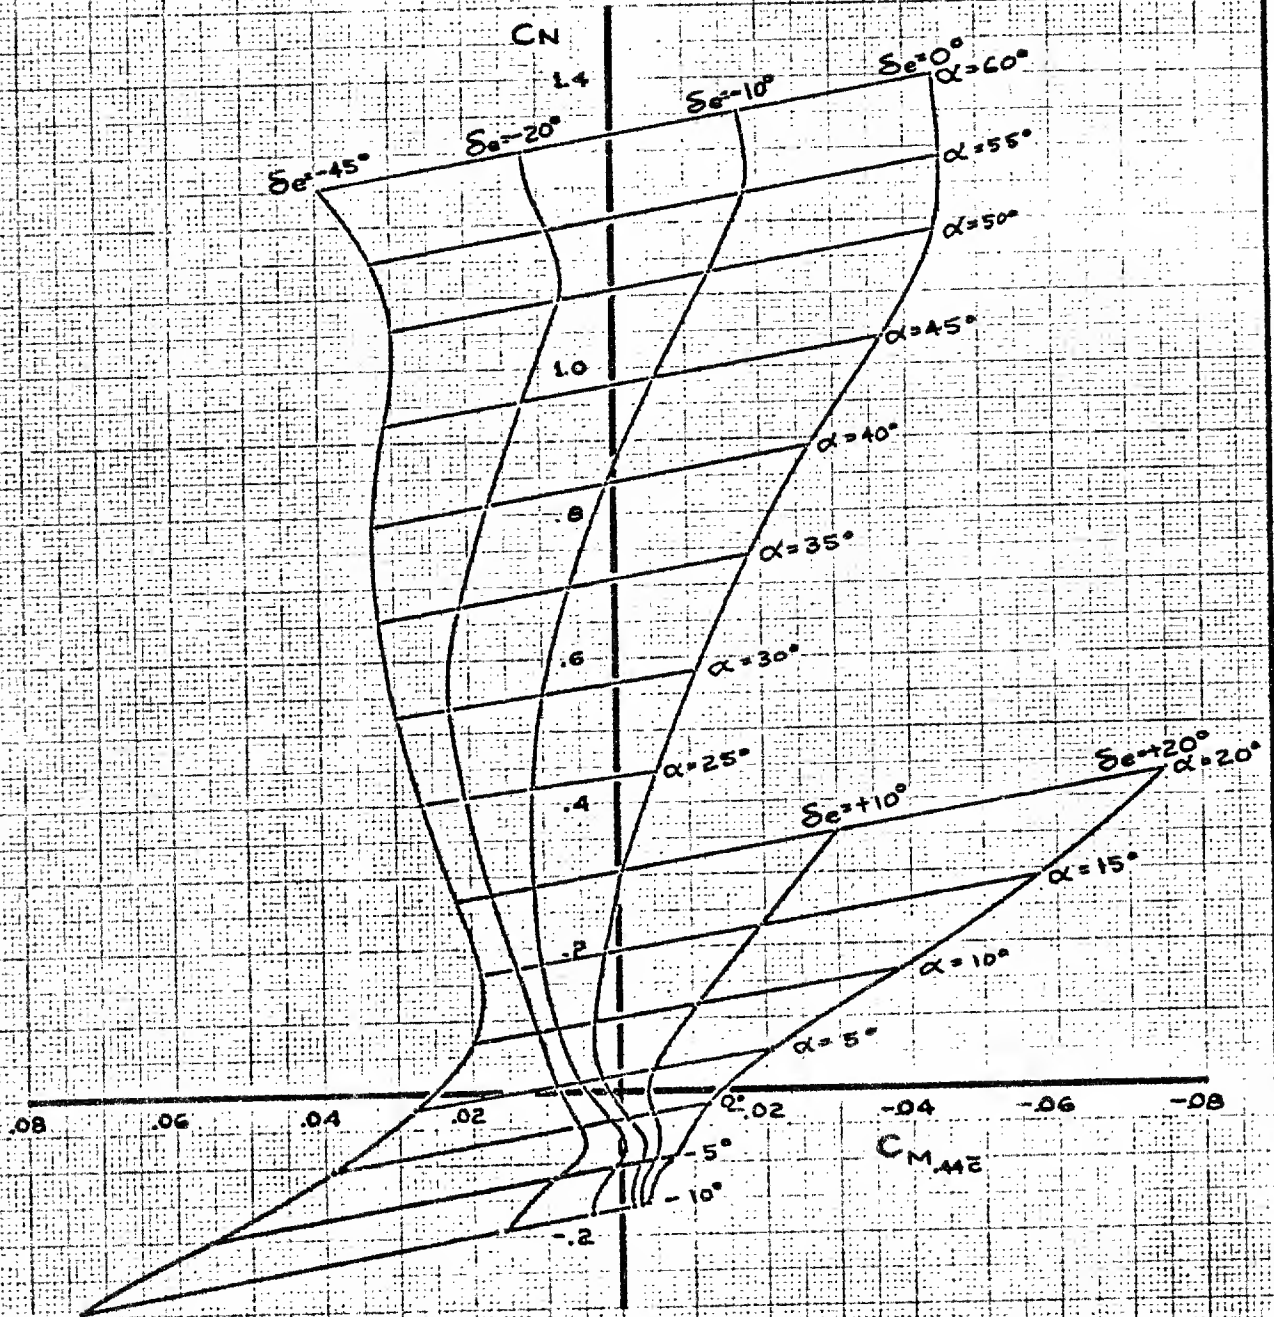


FIG. 6.20

CALC	J.L. FRANCIS	11/22/61	REVISED	DATE
CHECK				
APR				
APR				

HOT SHAPE
LONGITUDINAL STABILITY
M = 9.0 LOW RN_z

844-2050 D
 02-80065
 PAGE 6.27

THE BOEING COMPANY

CONFIDENTIAL

CONFIDENTIAL **M = 9.0**

RIGID GLIDER
 $RNE = 8.1 \times 10^5$
 ALTITUDE $\approx 180,000$ FT

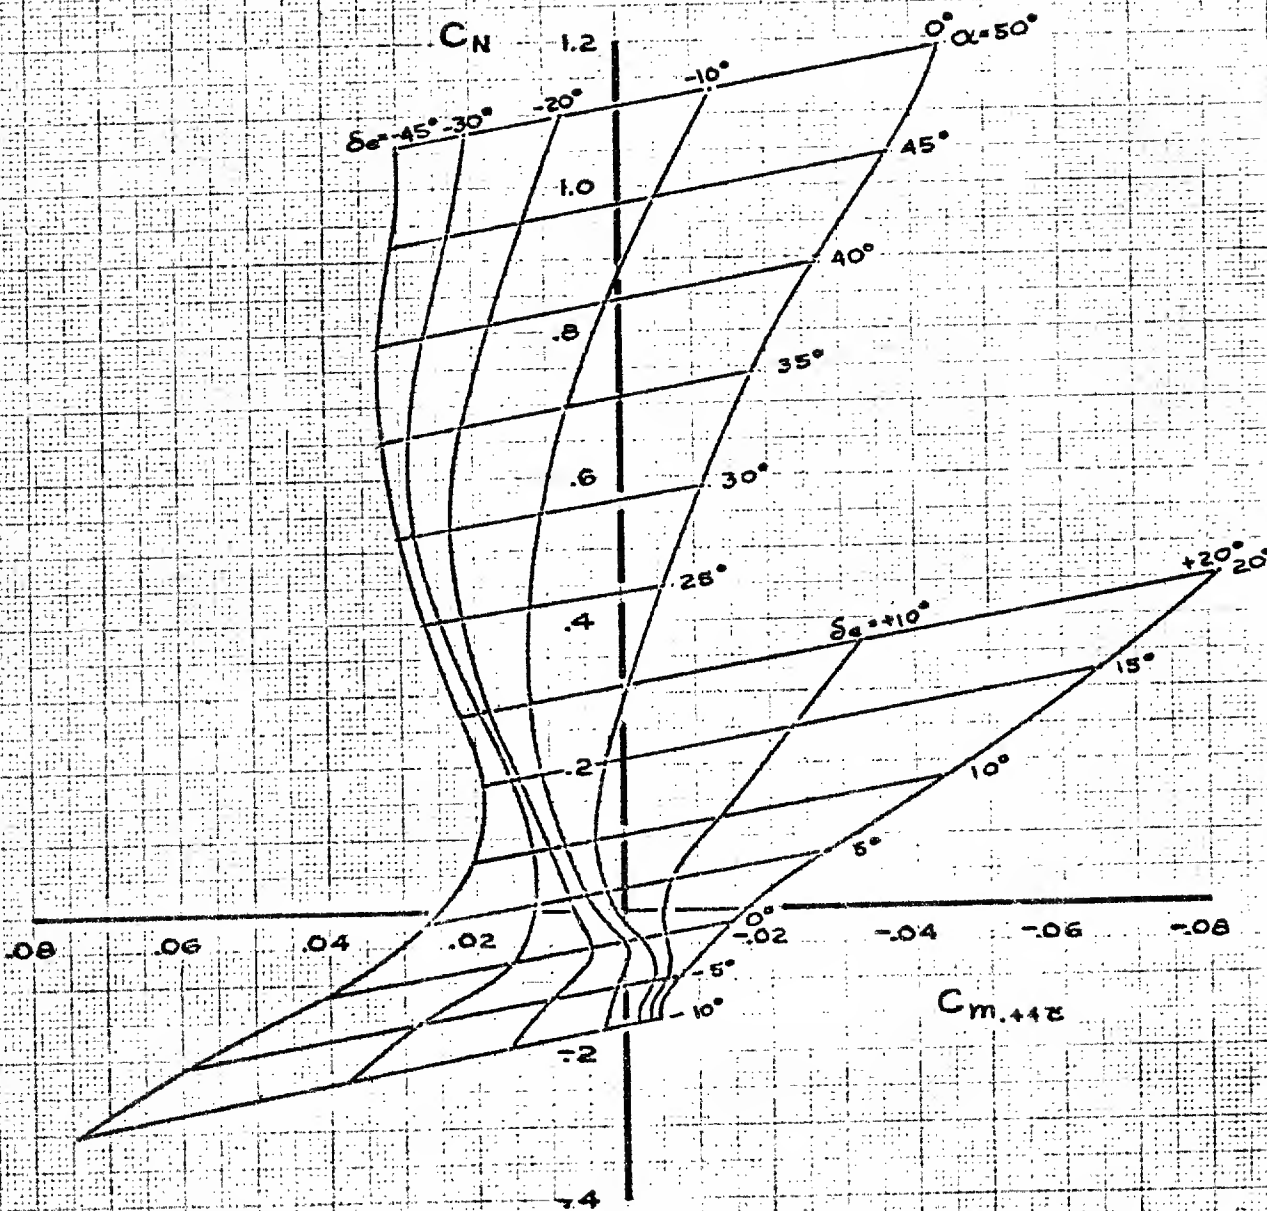


Fig. 6.21

CALC	J.L. FRANCIS	11/10/61	REVISED	DATE
CHECK				
APR				
APR				
TRACE	N.U.			

HOT SHAPE
 LONGITUDINAL STABILITY
 M = 9.0

844 -
 20500
 02-80065
 PAGE
 6.23

THE BOEING COMPANY

CONFIDENTIAL

M=11.0

CONFIDENTIAL

RIGID GLIDER

$RN_z = 4.5 \times 10^5$

ALTITUDE $\approx 195,000$ FT

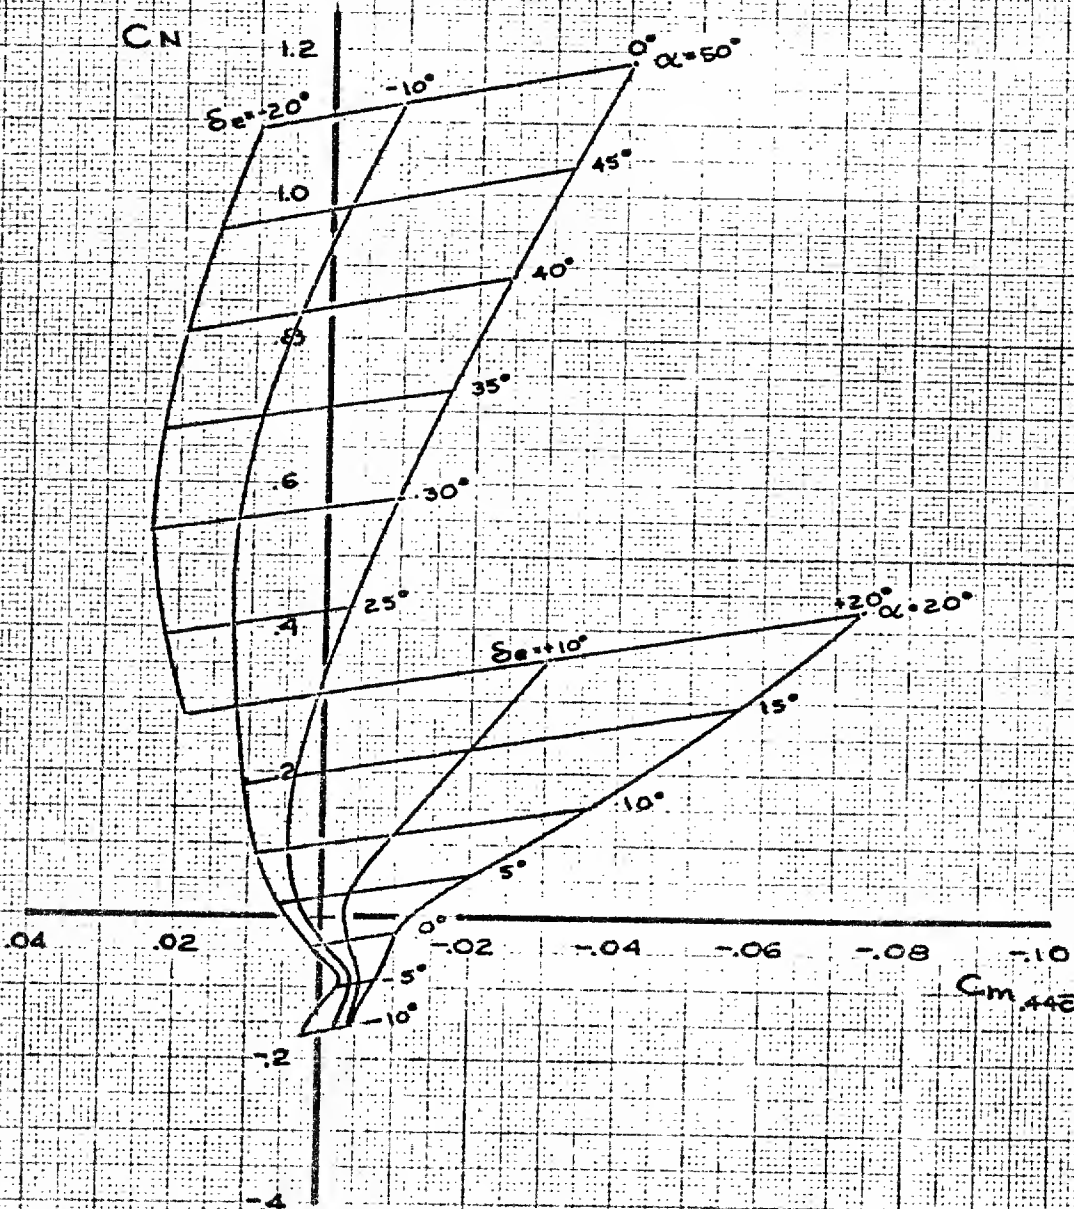


FIG. 6.22

CALC	D. KATZ	11-18-61	REVISED	DATE
CHECK			12-27-61	
APR				
APR				

HOT SHAPE
LONGITUDINAL STABILITY
M = 11.0

844-
2050D
02-80065

TRACE N.W.
U3 4013 8000

CONFIDENTIAL

103

M = 16.0

CONFIDENTIAL

RIGID GLIDER

$R_{NE} = .164 \times 10^6$

ALTITUDE $\approx 236,000$ FT.

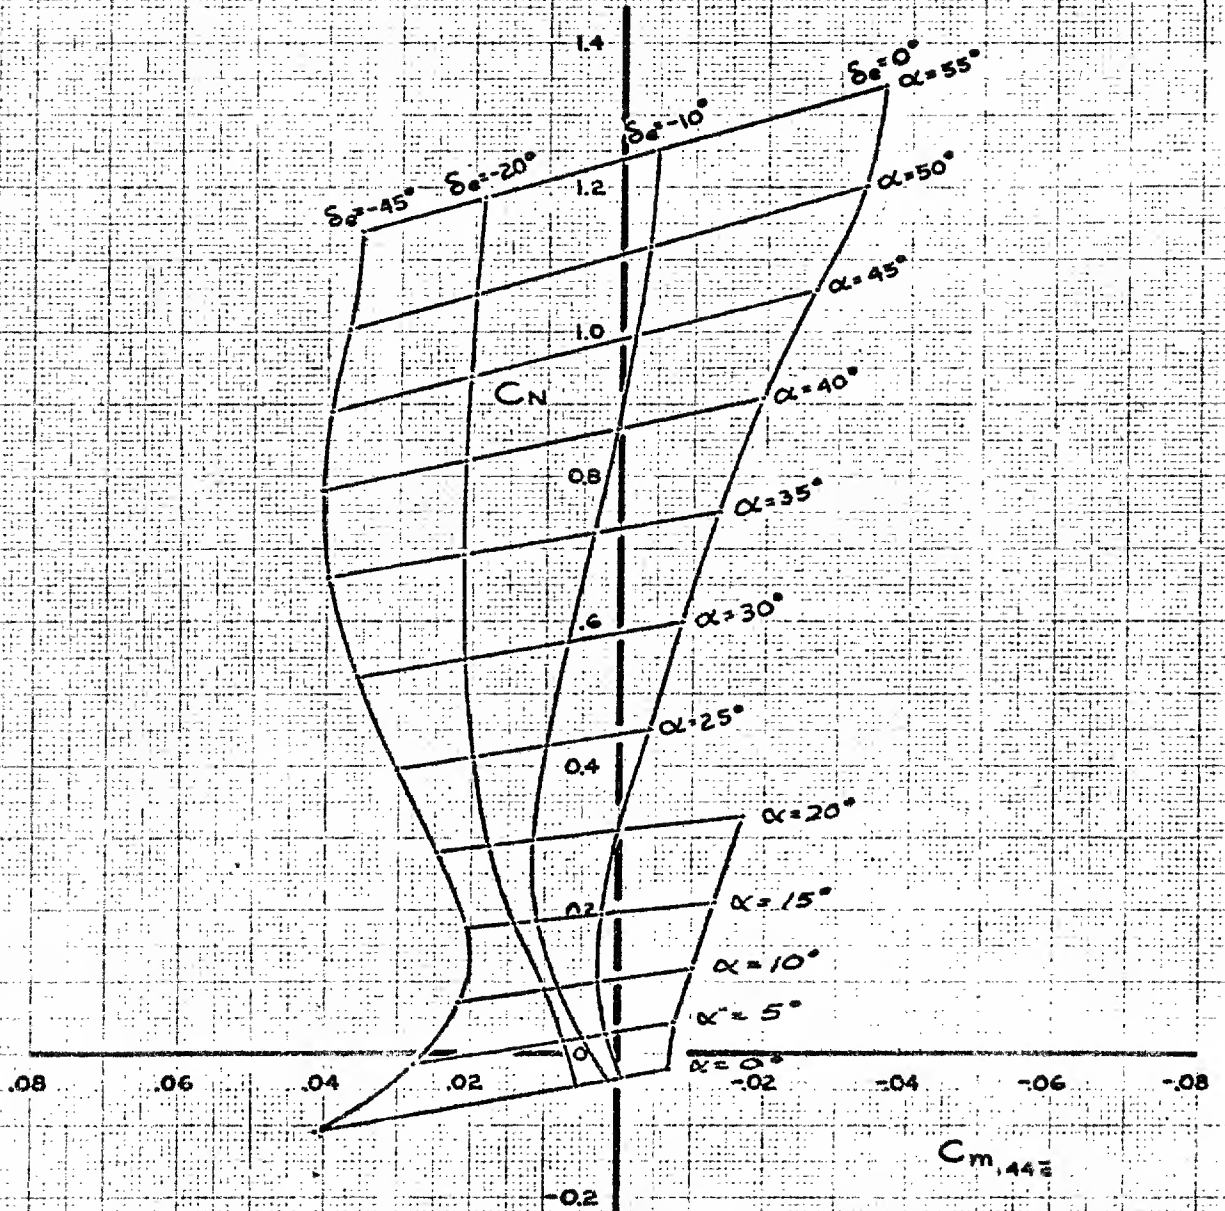


FIG. G.23

CALC	E. PIPER	11-9-61	REVISED	DATE
CHECK				
APR				
APR				
TRACE				

**HOT SHAPE
LONGITUDINAL STABILITY
M = 16.0**

**844-
20500
D2-80065
PAGE
6.30**

CONFIDENTIAL


M=22.0

CONFIDENTIAL

RIGID GLIDER

$R_{N2} = .066 \times 10^6$

ALTITUDE $\approx 263,000$ FT.

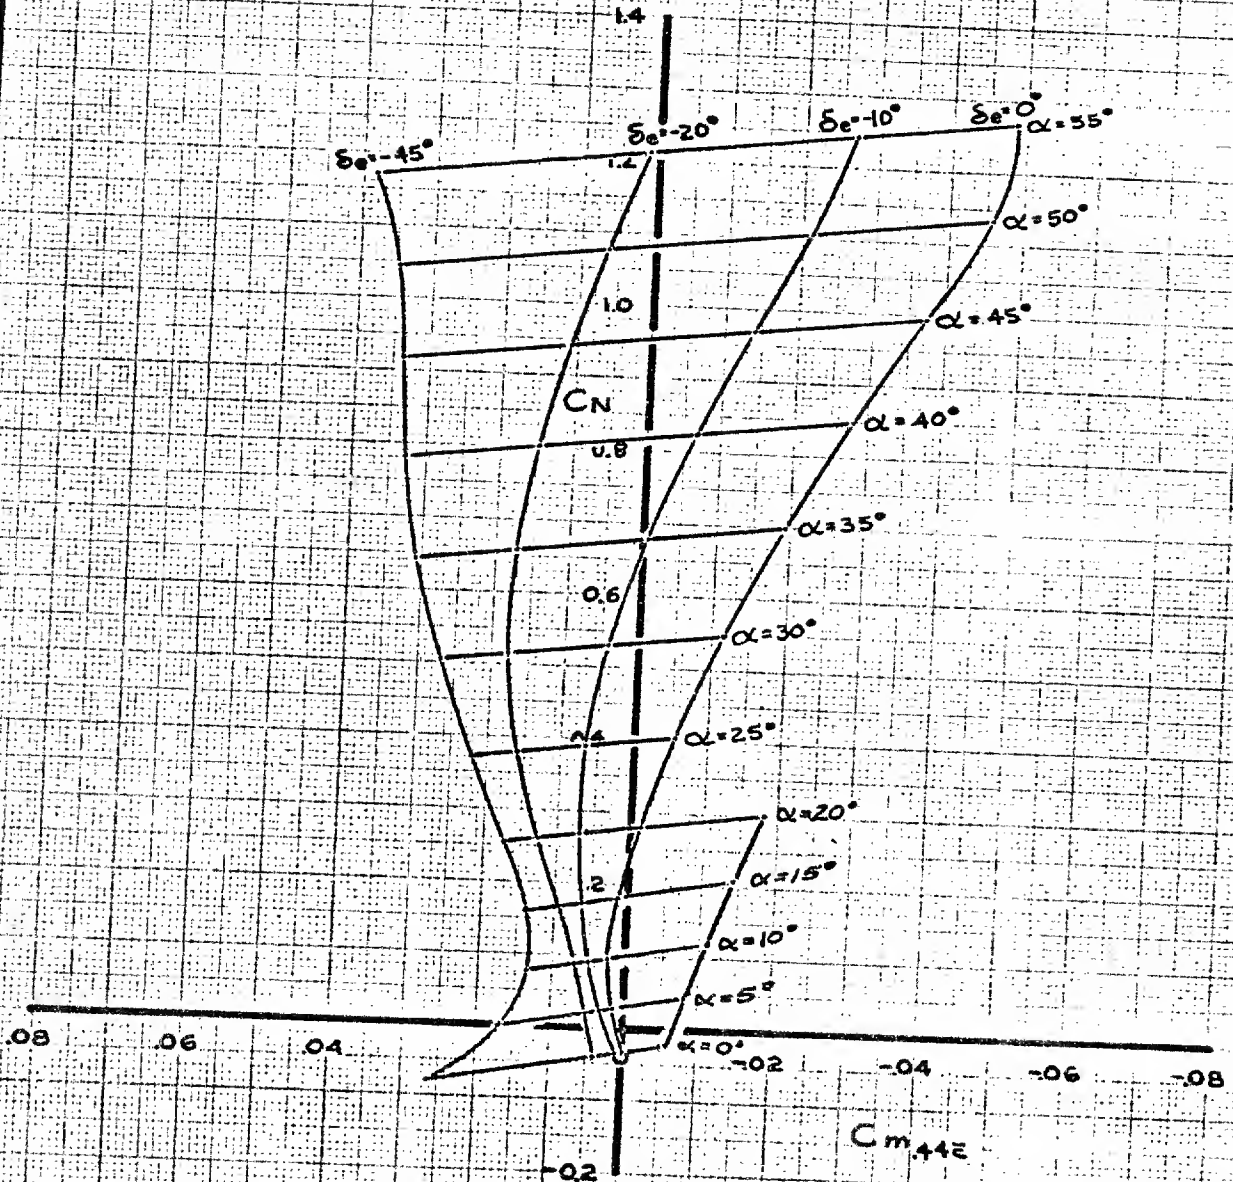

CALC	E. PIPER	11-9-1	REVISED	DATE
CHECK				
APR				
APR				

HOT SHAPE
LONGITUDINAL STABILITY
M=22.0

FIG. 6.24

844-
20500

D2-80065

THE BOEING COMPANY

PAGE

6.31

CONFIDENTIAL

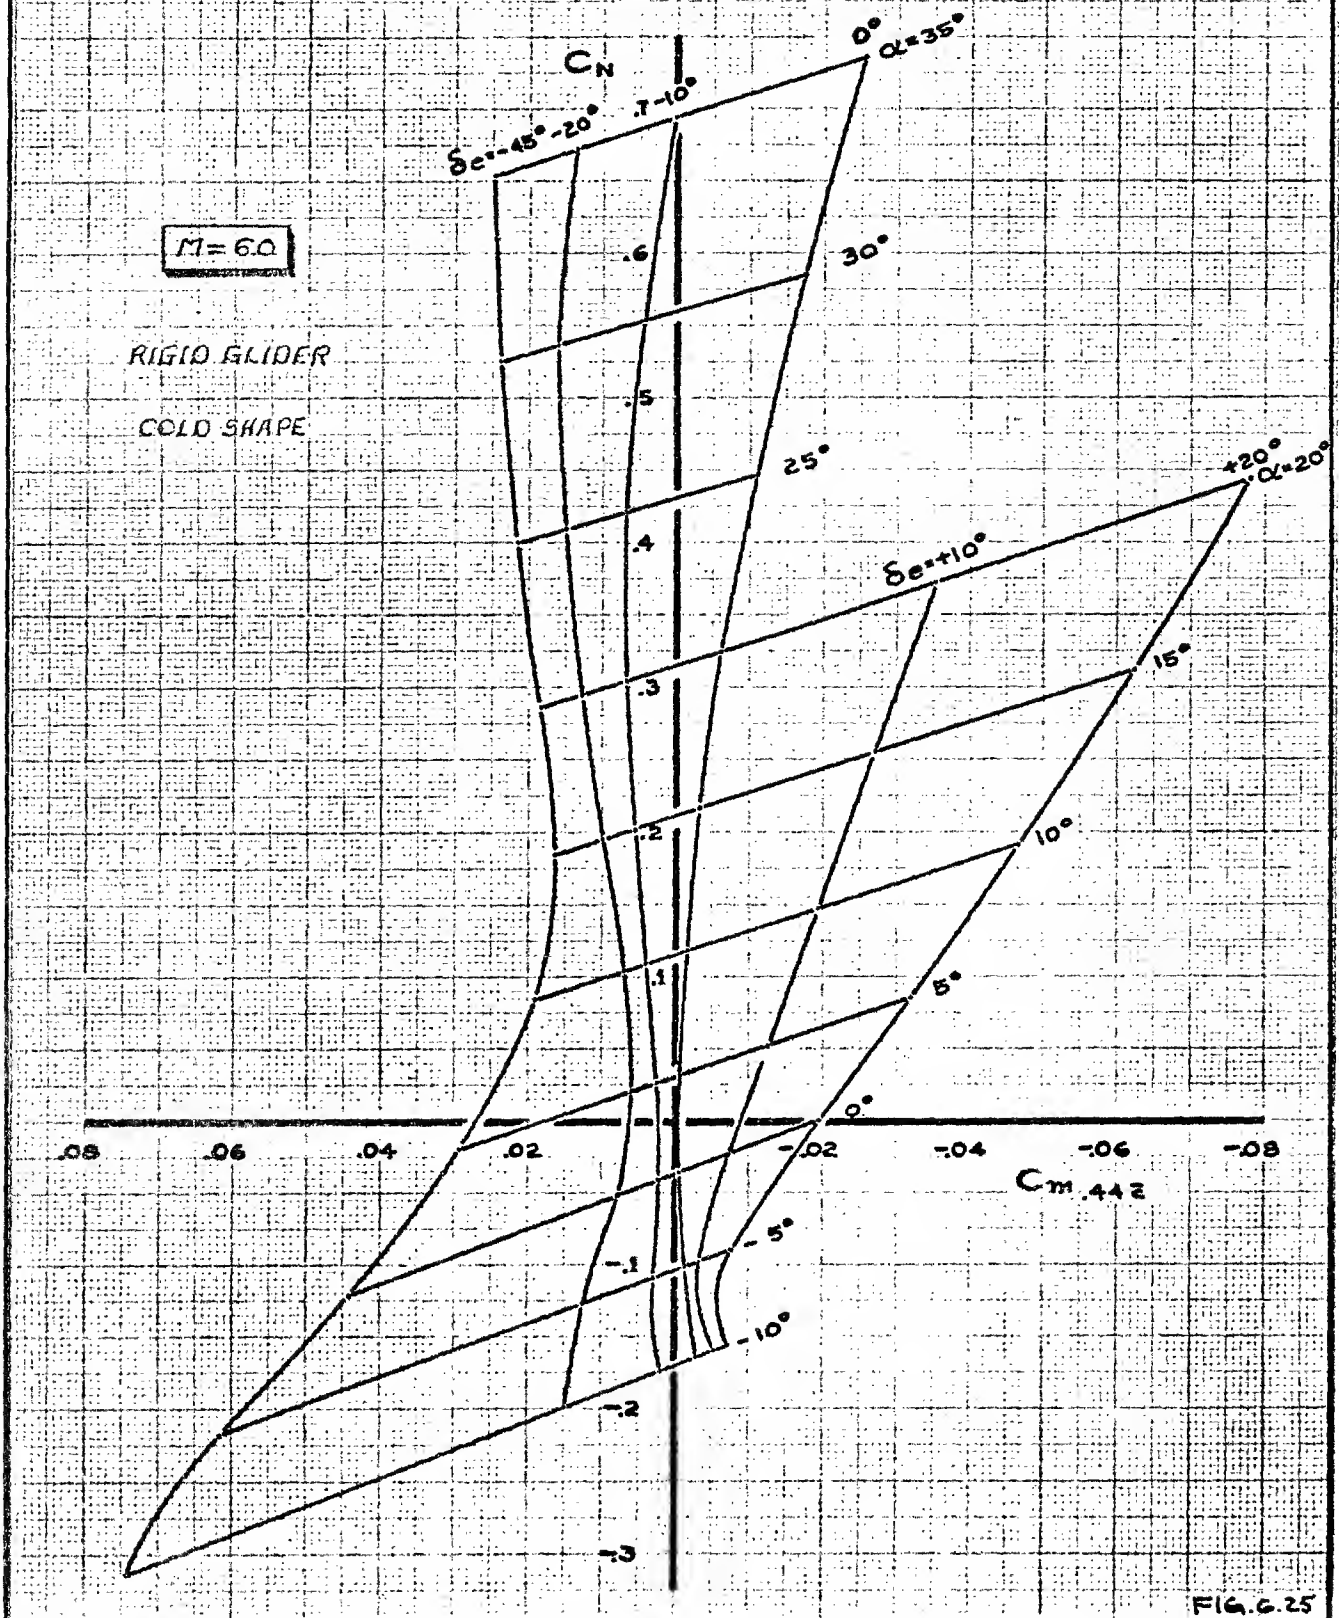


FIG. 6.25

CALC	G D K	11-13-61	REVISED	DATE	COLD SHAPE LONGITUDINAL STABILITY M=6.0 THE BOEING COMPANY	844- 2050D
CHECK						DE-80065
APR						PAGE
APR						6.32
DRN	JH	12-13-61				

CONFIDENTIAL

$M = 8.08$

RIGID GLIDER

COLD SHAPE

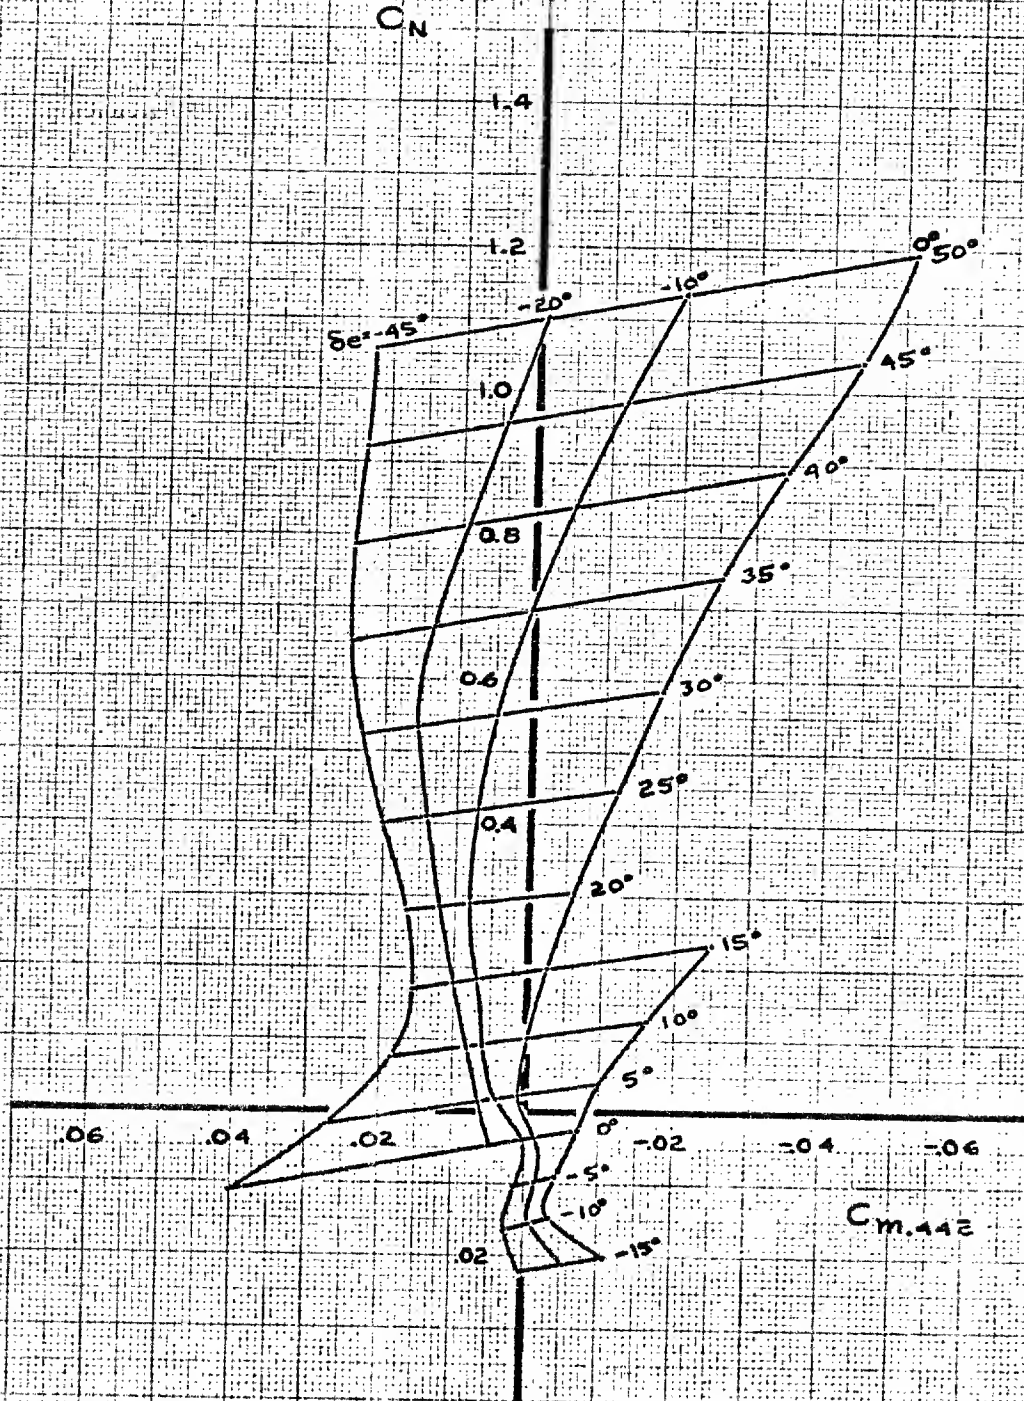


FIG. 6.26

CALC	LDK	RECI	REVISED	DATE
CHECK				
APR				
APR				

COLD SHAPE
LONGITUDINAL STABILITY
 $M = 8.08$

THE BOEING COMPANY

844-
2060.0
02-80065
PAGE
6.33

CONFIDENTIAL

CONFIDENTIAL

$M=9.0$

RIGID GLIDER

COLD SHAPE

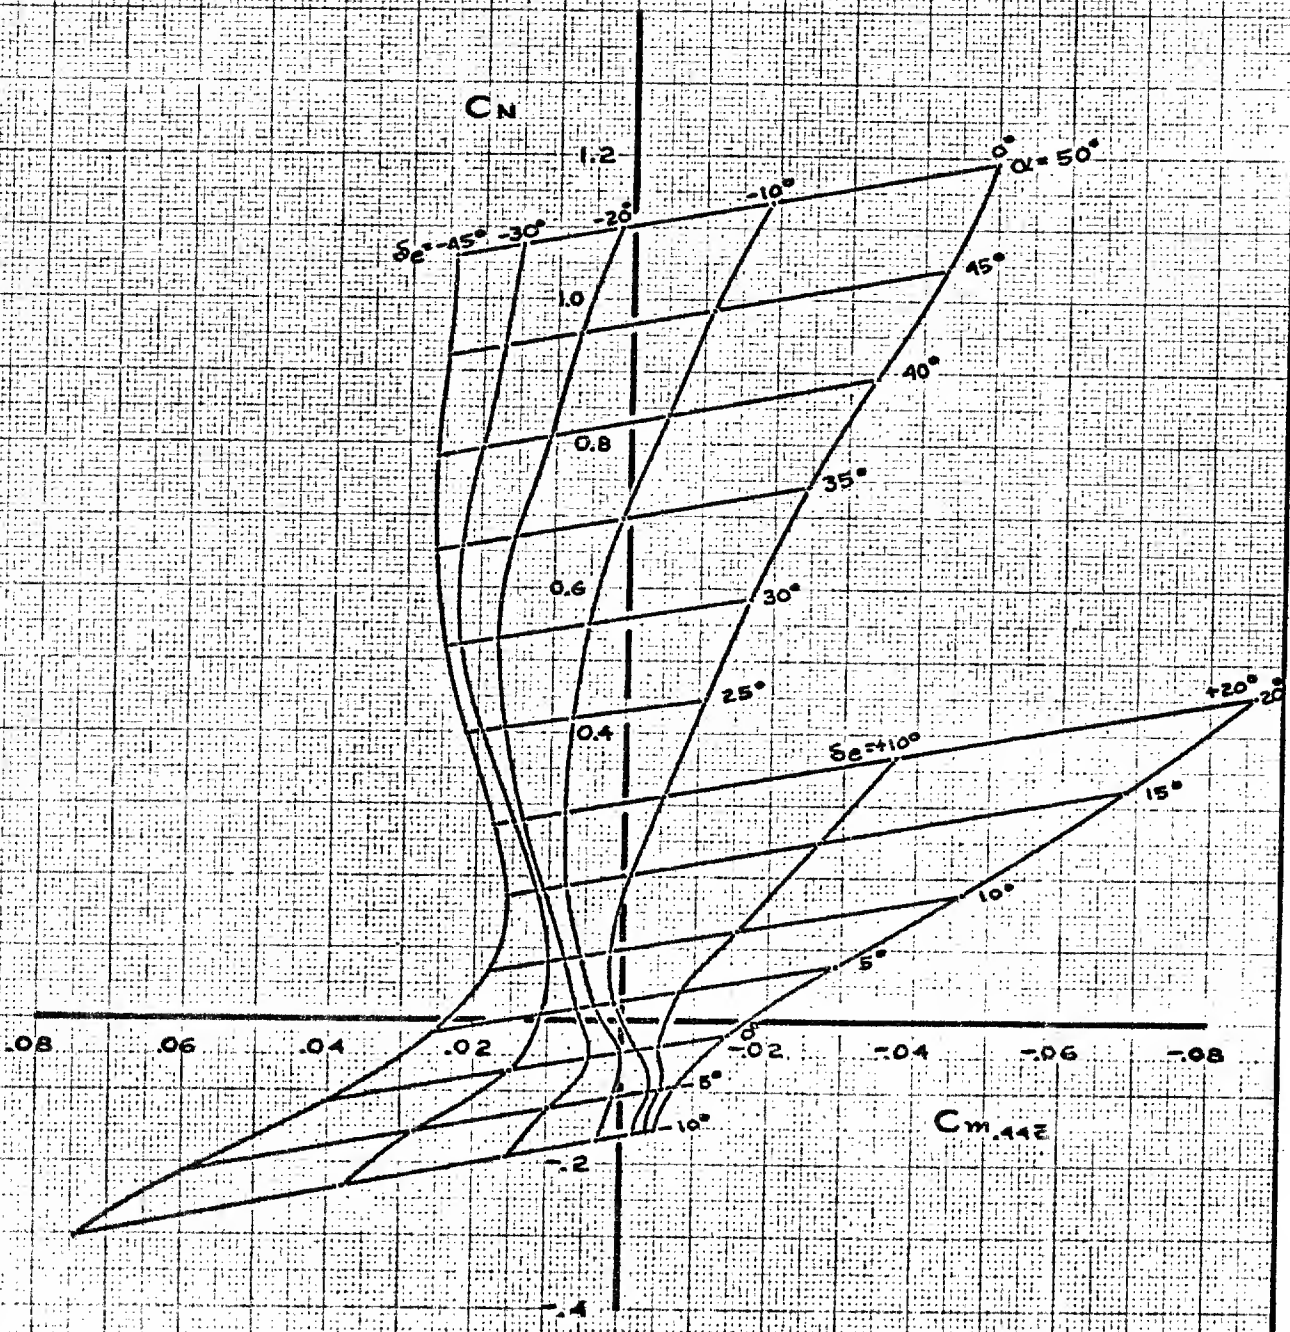


FIG. 6.27

CALC	EDK	12-11-01	REVISED	DATE
CHECK				
APR				
APR				

COLD SHAPE
LONGITUDINAL STABILITY
 $M=9.0$

THE BOEING COMPANY

844-
20500
D2-80065
PAGE
6.34

CONFIDENTIAL

108

CONFIDENTIAL

250 000 FT-ALT

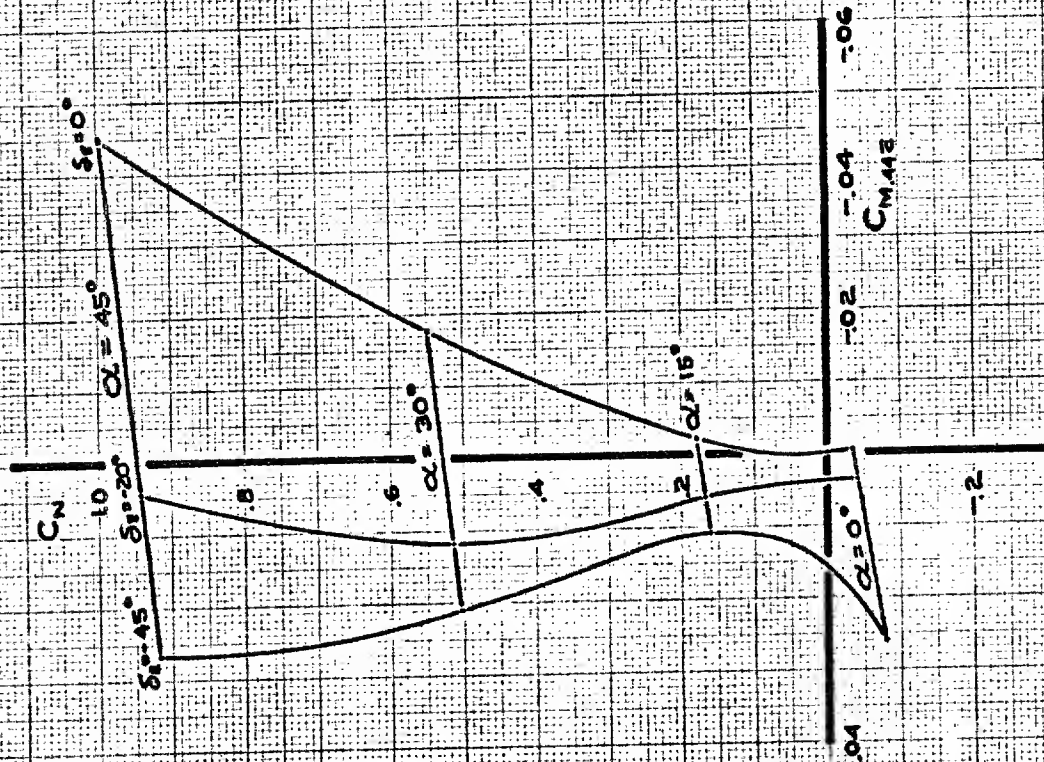


FIG. C. 28

CALC	J.L. FRANCIS	12/14/61	REVISED	DATE
CHECK			12-2-61	
APR				
APR				

COLD SHAPE
LONGITUDINAL STABILITY
250 000 FT ALT

THE BOEING COMPANY

844-
2050 D
DR-80065
PAGE
6.35

CONFIDENTIAL

109

CONFIDENTIAL

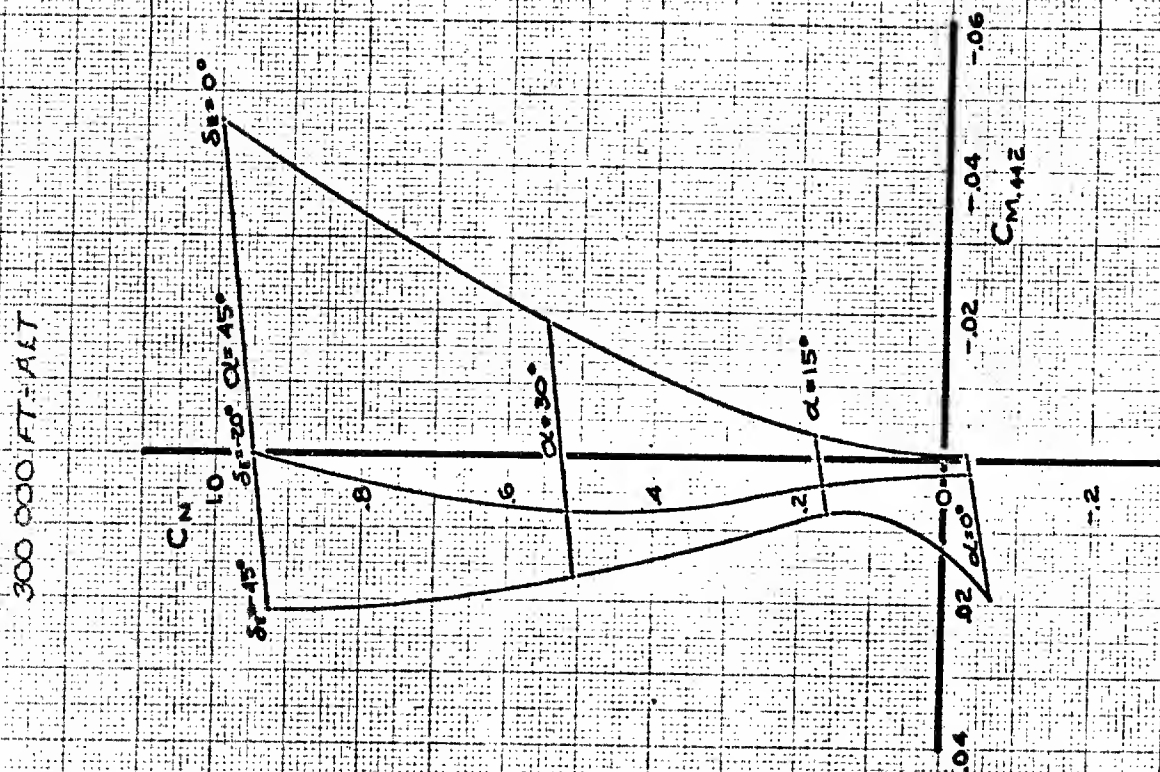


FIG. 6.29

COLD SHAPE
LONGITUDINAL STABILITY
300 000 FT-ALT

THE BOEING COMPANY

844-
2050 D

DR-80065

PAGE
636

CALC	J.L.F./G.D.K.	12/14/61	REVISED	DATE
CHECK			2/2/61	
APR				
APR				

CONFIDENTIAL

CONFIDENTIAL

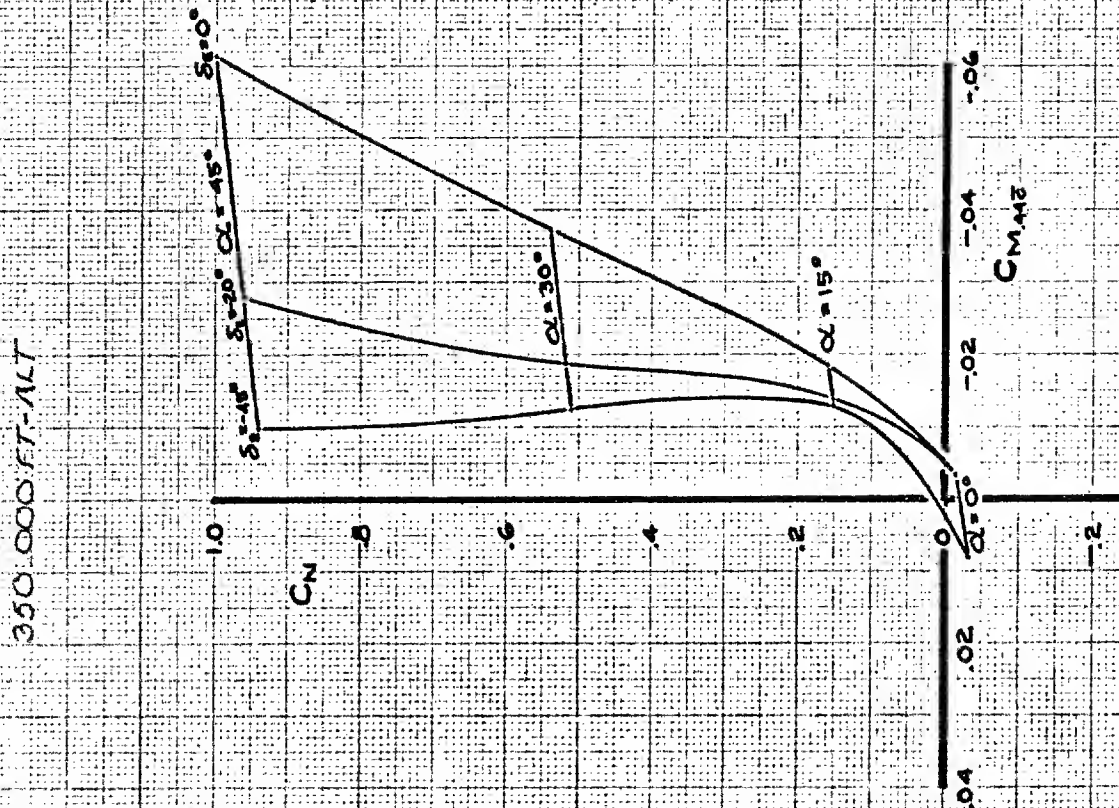


FIG. 6.30

CALC	J.L.F./G.D.K.	12/14/61	REVISED	DATE
CHECK			12-20-61	
APR				
APR				

COLD SHAPE
LONGITUDINAL STABILITY
350 000 FT-ALT

THE BOEING COMPANY

844-
2050 P
02-80065
PAGE
6.37

CONFIDENTIAL

CONFIDENTIAL

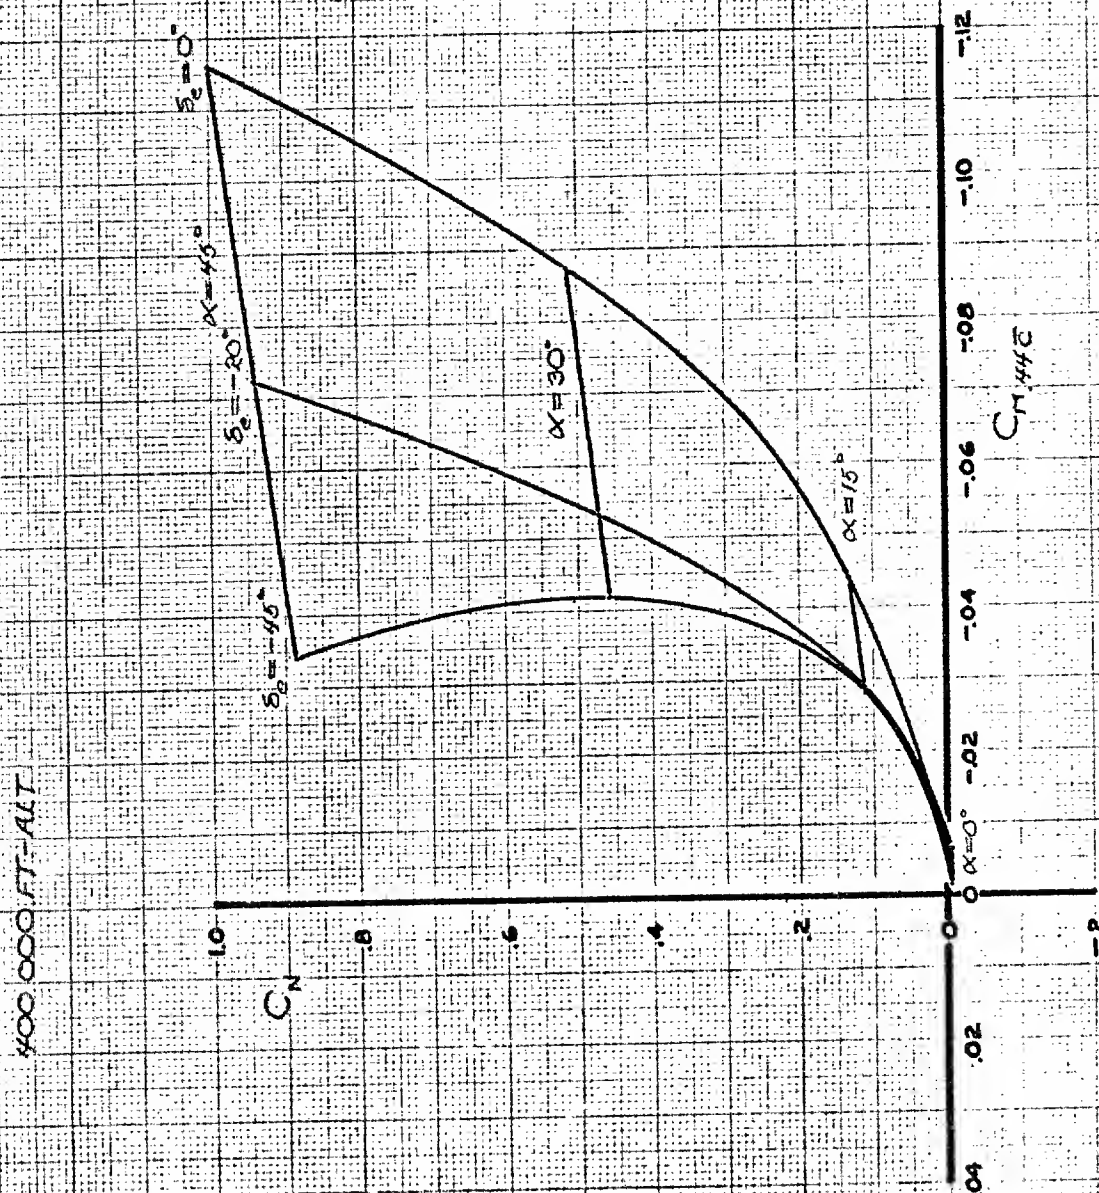


FIG. G.31

CALC	JL. FRANCIS	12/14/61	REVISED	DATE
CHECK				
APR				
APR				

COLD SHAPE
LONGITUDINAL STABILITY
400 000-FT-ALT

THE BOEING COMPANY

844-
2050 D.
02-80065
PAGE
6.32

CONFIDENTIAL

CONFIDENTIAL

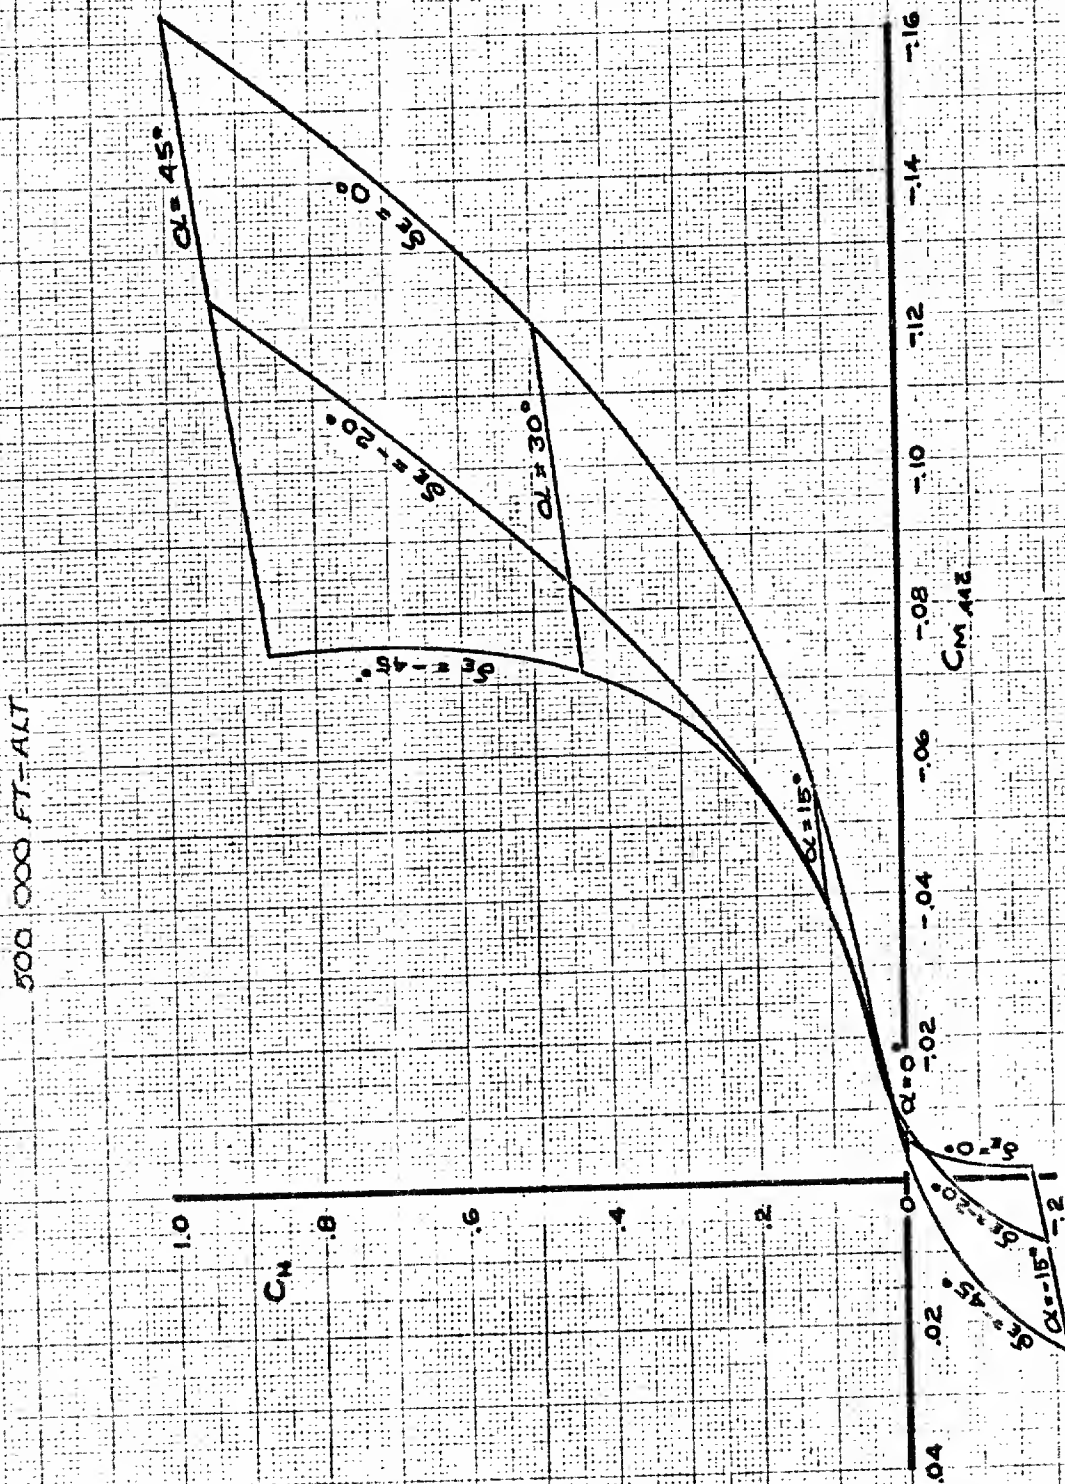


FIG. 6.32

CALC	J.L. Francis	10/3/61	REVISED	DATE
CHECK				
APR				
APR				

COLD SHAPE
LONGITUDINAL STABILITY
500 000 FT-ALT

THE BOEING COMPANY

244-
2050 D
02-80065
PAGE
6.39

CONFIDENTIAL

Approved For Release 2003/10/15 : CIA-RDP70B00584R000200010001-1

M=6.0

RIGID GLIDER
HOT SHAPE

$R_{N2} = 2.11 \times 10^6$
ALTITUDE $\approx 165,000$ FT

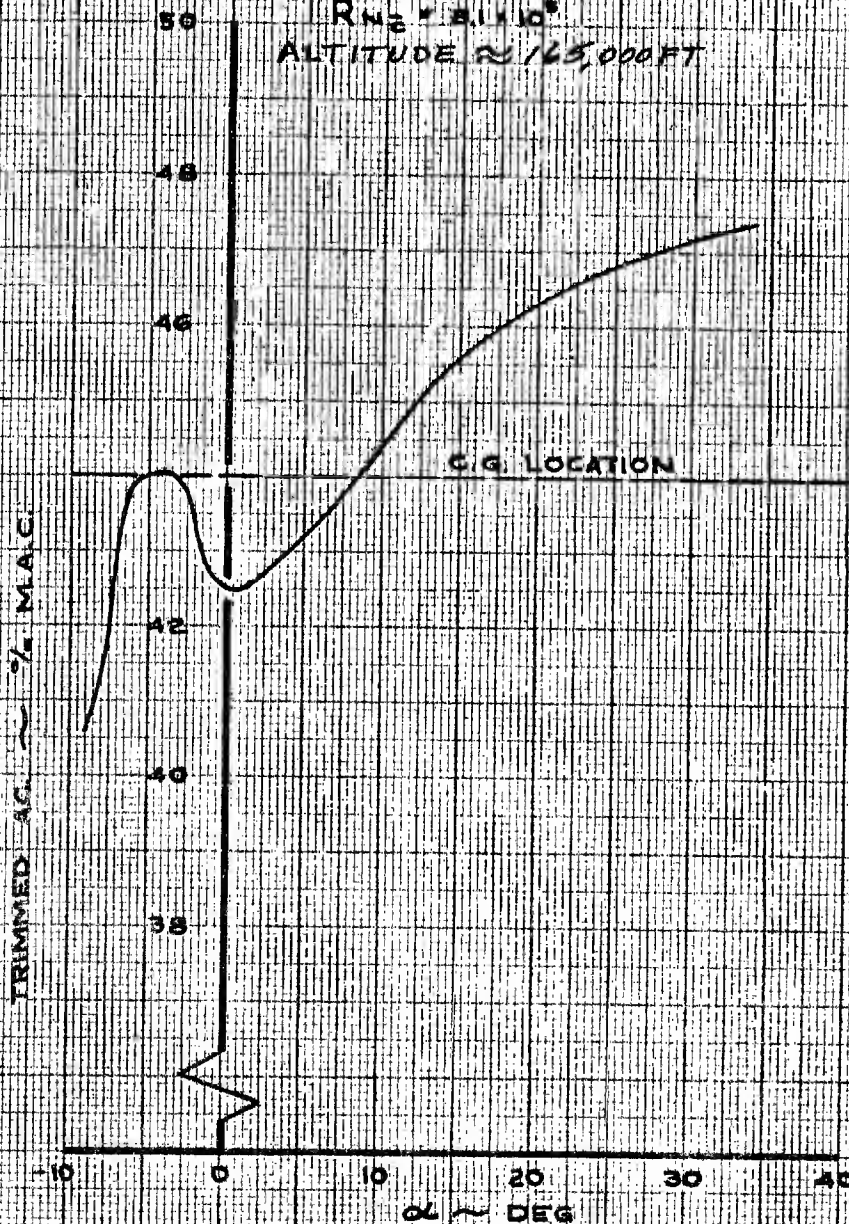


Fig. 6.33

CALC	J.J. FRANCIS	11-10-61	REVISED	DATE	TRIMMED LONGITUDINAL AERODYNAMIC CENTER $M = 6.0$	844 -
CHECK			12-20-61			2050 D
APR						02-80066
APR						
TRACE	N.D.	11-10-61	Approved For Release 2003/10/15 : CIA-RDP70B00584R000200010001-1			

11-10-61 8000

CONFIDENTIAL

K-E ALBANY 1981 50627
③ TRACING PAPER

CONFIDENTIAL

$M=8.08$

RIGID GLIDER
HOT SHAPE

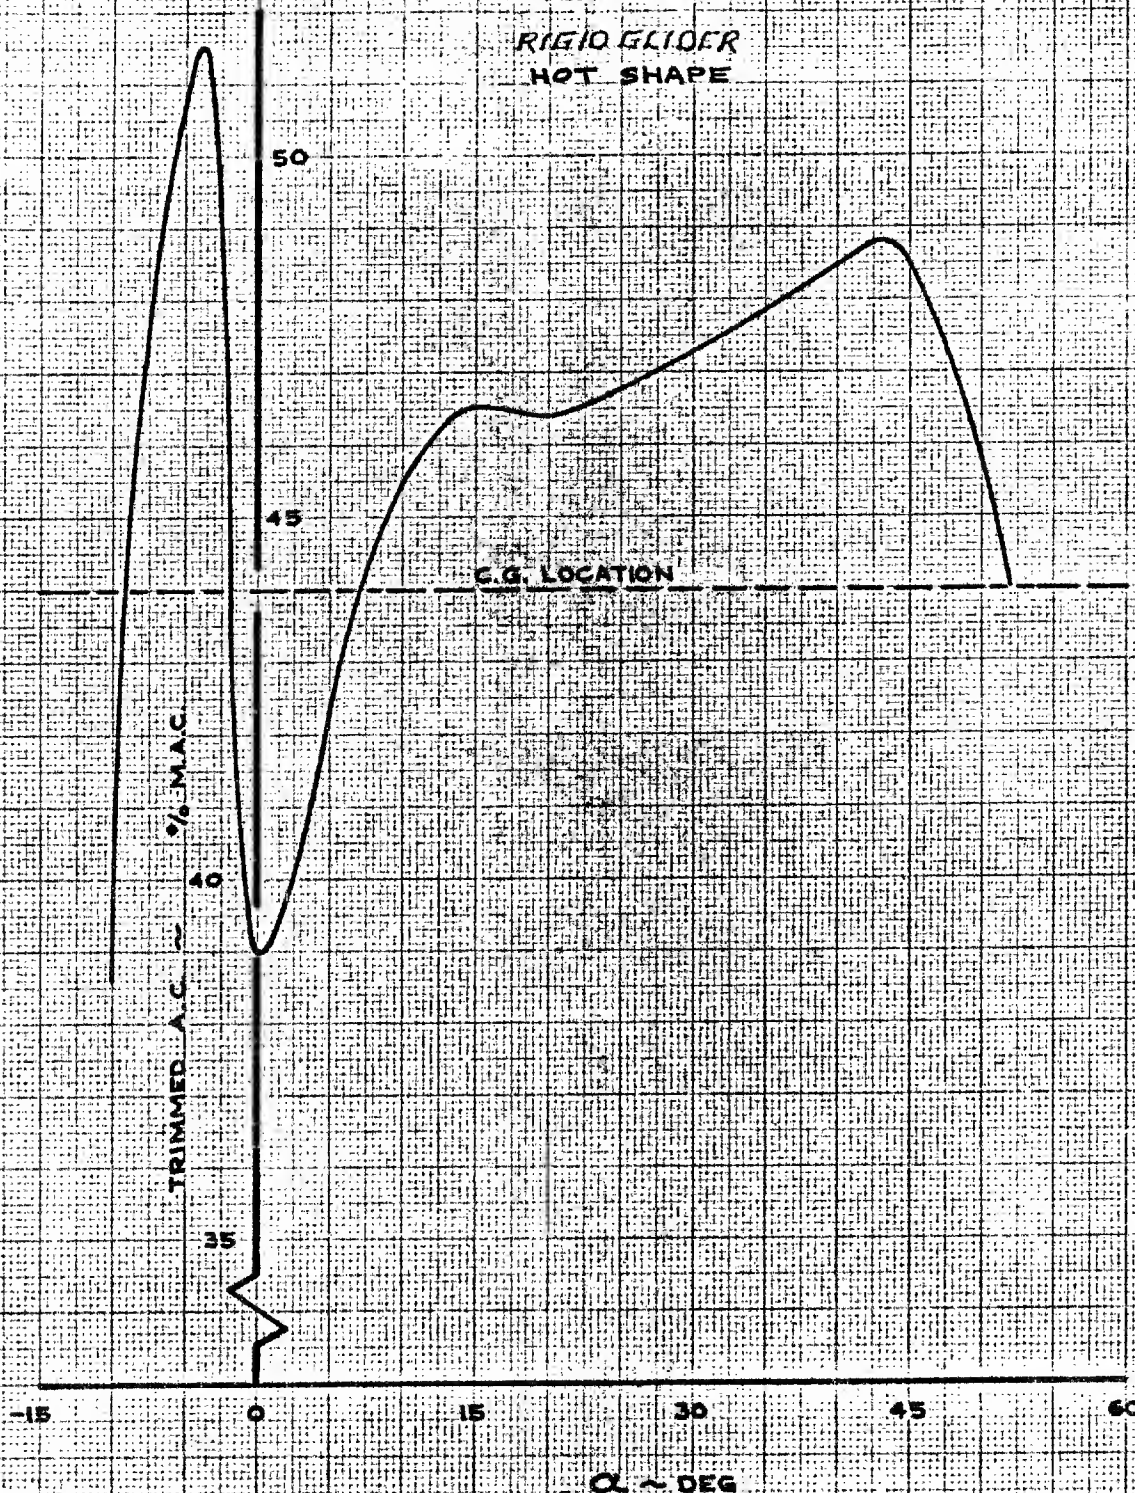


FIG. C.34

CALC	JL FRANCIS	REVISED	DATE
CHECK		12-20-1	
APR			
APR			
DRN	N.U.	11-9-61	

TRIMMED LONGITUDINAL
AERODYNAMIC CENTER
 $M=8.08$

THE BOEING COMPANY

844-
2060 D
DR-80065
PAGE
6.41

CONFIDENTIAL

CONFIDENTIAL

$M = 9.0$

RIGID GLIDER

HOT SHAPE

$R_{N\bar{c}} = 4.5 \times 10^5$

ALTITUDE $\approx 195,000$ FT

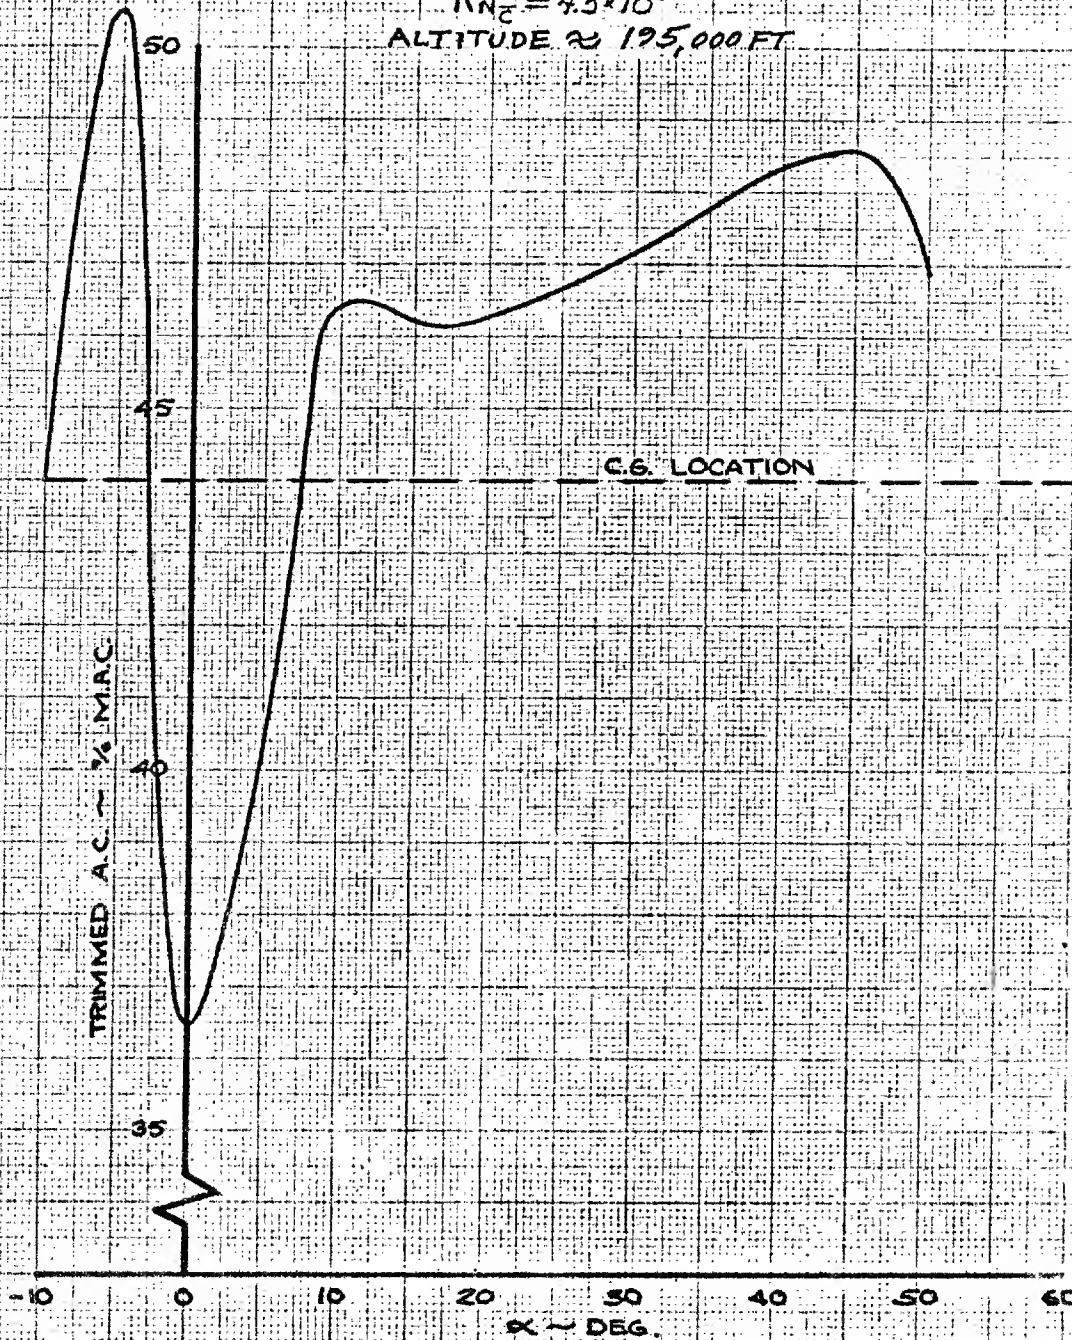


FIG. 6.35

CALC	J.L. FRANCIS	12/13/61	REVISED	DATE
CHECK				
APR				
APR				

TRIMMED LONGITUDINAL
AERODYNAMIC CENTER
 $M = 9.0$ LOW $R_{N\bar{c}}$

THE BOEING COMPANY

844-
2050 D
DR-80065
PAGE
6.42

CONFIDENTIAL

CONFIDENTIAL


$M = 9.0$

RIGID GLIDER

HOT SHAPE

$R_N = 8.1 \times 10^5$

ALTITUDE $\approx 180,000$ FT

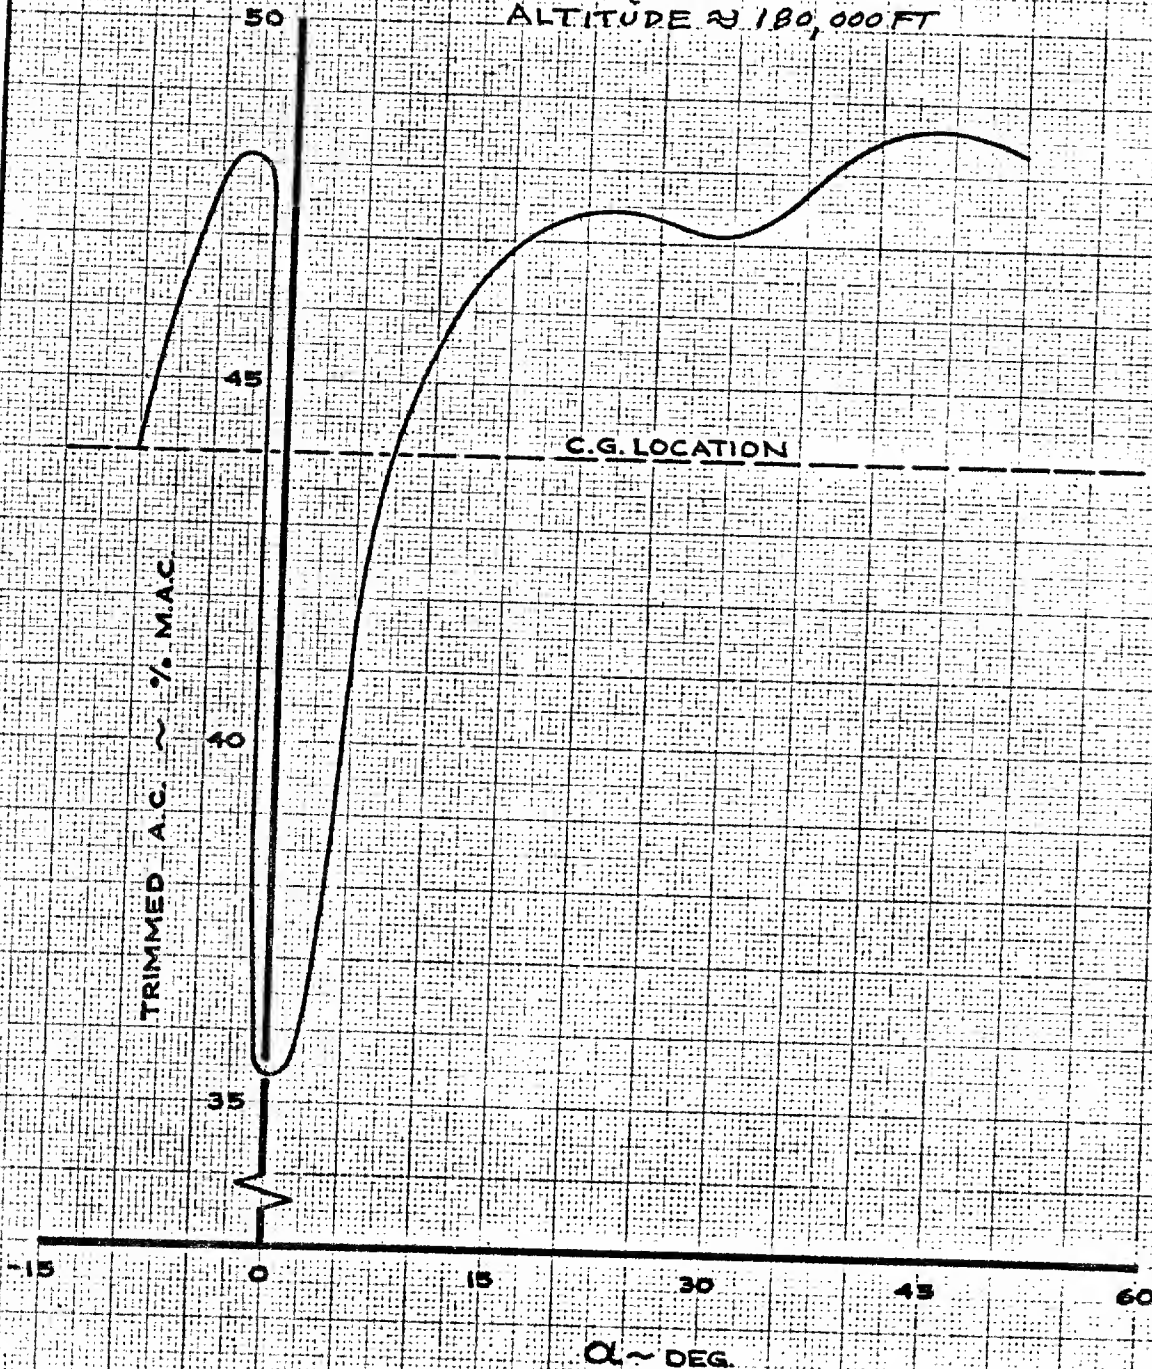

CALC	Emp	11/14/61	REVISED	DATE
CHECK			11-22-61	
APR				
APR				
TRACE	N.U.	11-17-61		

$M = 9.0$
TRIMMED LONGITUDINAL
AERODYNAMIC CENTER

FIG. G.36

844-
2050D

D2-80065

PAGE

THE BOEING COMPANY

1-6.43

CONFIDENTIAL

CONFIDENTIAL

$M=11.0$

RIGID BENDER

HOT SHAPE

$R_{NE} = 4.5 \times 10^5$

ALTITUDE $\approx 195,000$ FT.

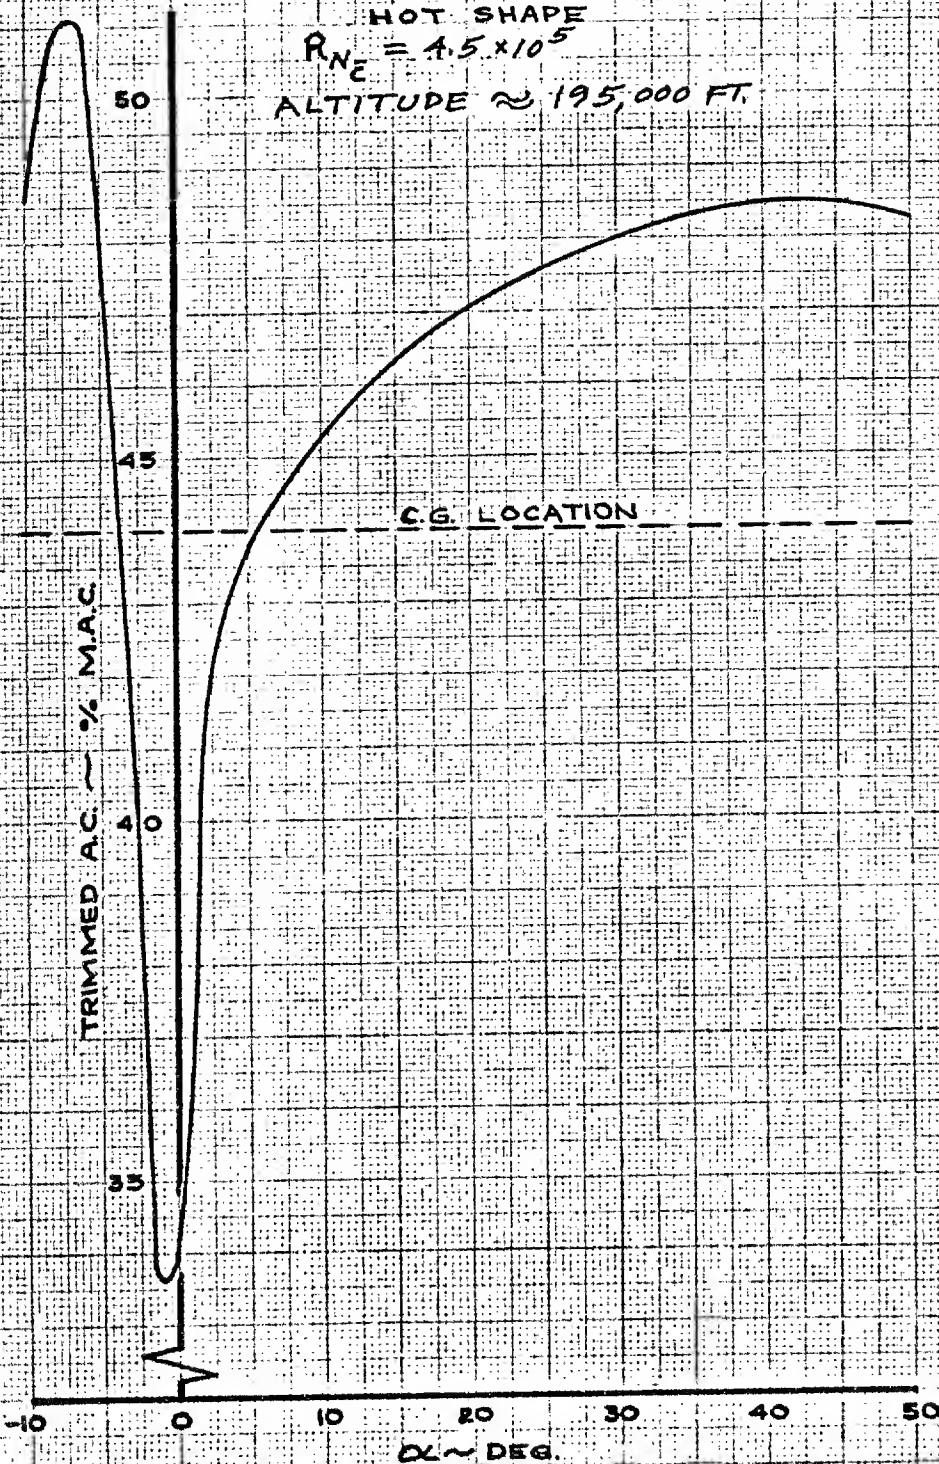


FIG. 6.31

CALC	J.L. FRANCIS	11/14/64	REVISED	DATE
CHECK			12/20/64	
APR				
APR				

TRIMMED LONGITUDINAL
AERODYNAMIC CENTER
 $M=11.0$

THE BOEING COMPANY

844-
20500
02-80065
PAGE
6.44

CONFIDENTIAL

CONFIDENTIAL

M = 16

RIGID GLIDER

HOT SHAPE

$R_{NE} = .164 \times 10^6$

ALTITUDE $\approx 236,000$ FT.

TRIMMED A.C. ~ % M.A.C.

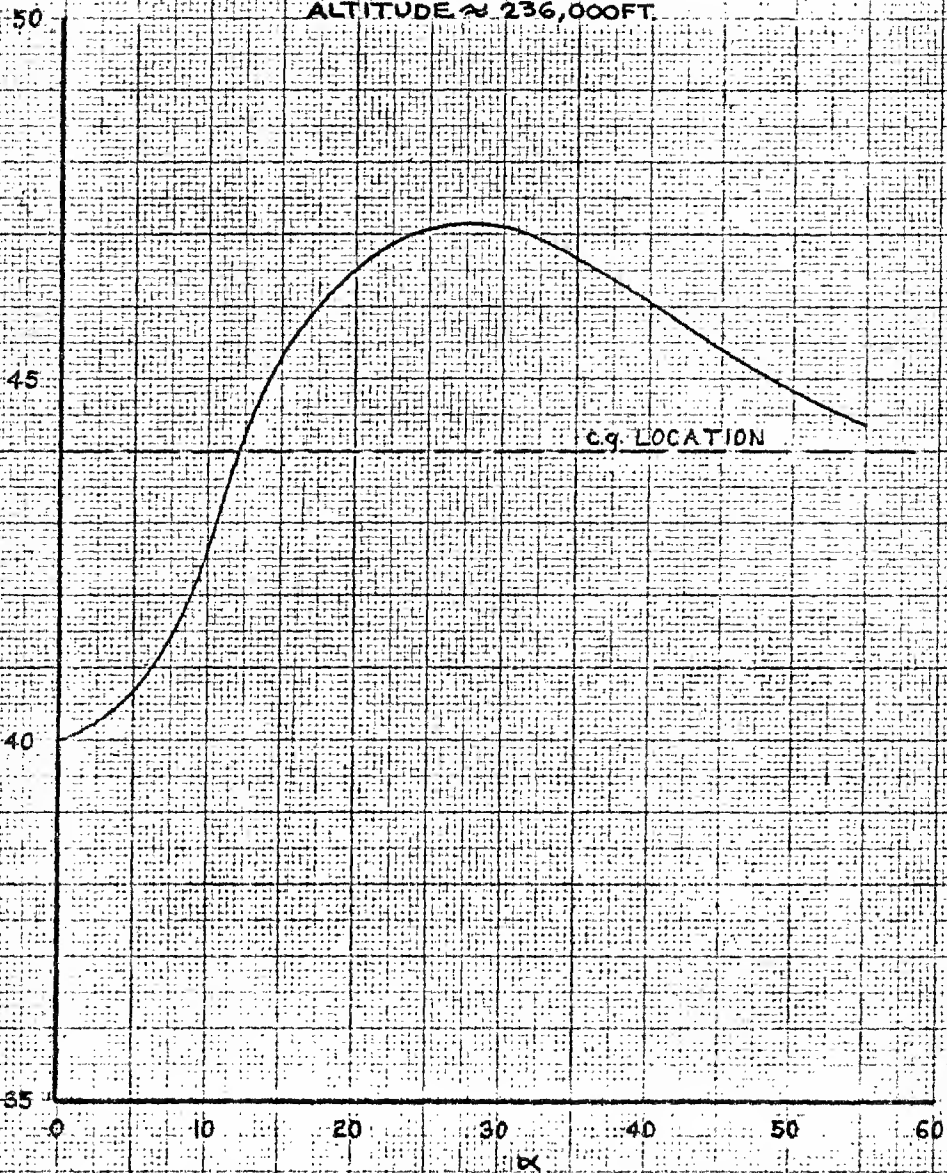


FIG. 6.38

CALC	E.M.P.		REVISED	DATE
CHECK			12-2-61	
APR				
APR				

TRIMMED LONGITUDINAL
AERODYNAMIC CENTER
M = 16

THE BOEING COMPANY

844 -
2050 D
D2-80065
PAGE
6.45

CONFIDENTIAL

M=22

RIGID GLIDER

HOT SHAPE

$R_{N2} = .066 \times 10^6$

ALTITUDE \approx 263,000 FT.

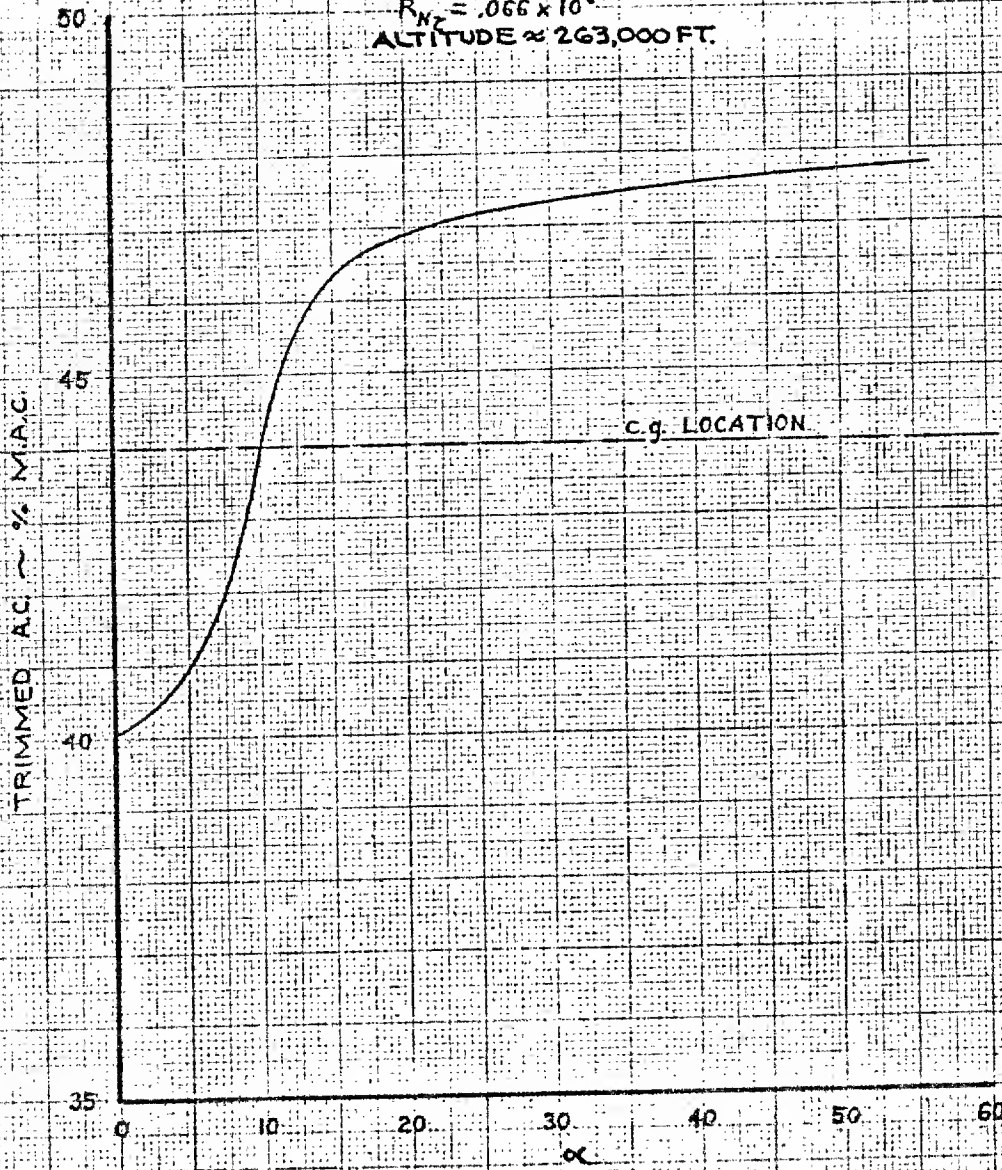


FIG. 6.39

CALC	E.M.P.	REVISED	DATE
CHECK		12/20/41	
APR			
APR			

TRIMMED LONGITUDINAL
AERODYNAMIC CENTER
M = 22

THE BOEING COMPANY

644 -
2050 D
D2-80065
PAGE
6.46

CONFIDENTIAL

120

CONFIDENTIAL

M = 6.0

**RIGID GLIDER
HOT SHAPE**

$RN_{\bar{e}} = 8.1 \times 10^5$
ALTITUDE $\approx 165,000$ FT

$\delta_{\text{TRIM}} \sim \text{DEG}$

$\alpha \sim \text{DEG}$

FIG. C.40

CALC	J.L. FRANCIS	11-10-61	REVISED	DATE
CHECK			12-27-61	
APR				
APR				
TRACE	N.D.			

**ELEVON REQUIRED
TO TRIM
M = 6.0**

THE BOEING COMPANY

844-2050 D

DR-80065

PAGE
6.47

CONFIDENTIAL

CONFIDENTIAL

$M = 8.08$

RIGID GLIDER
HOT SHAPE

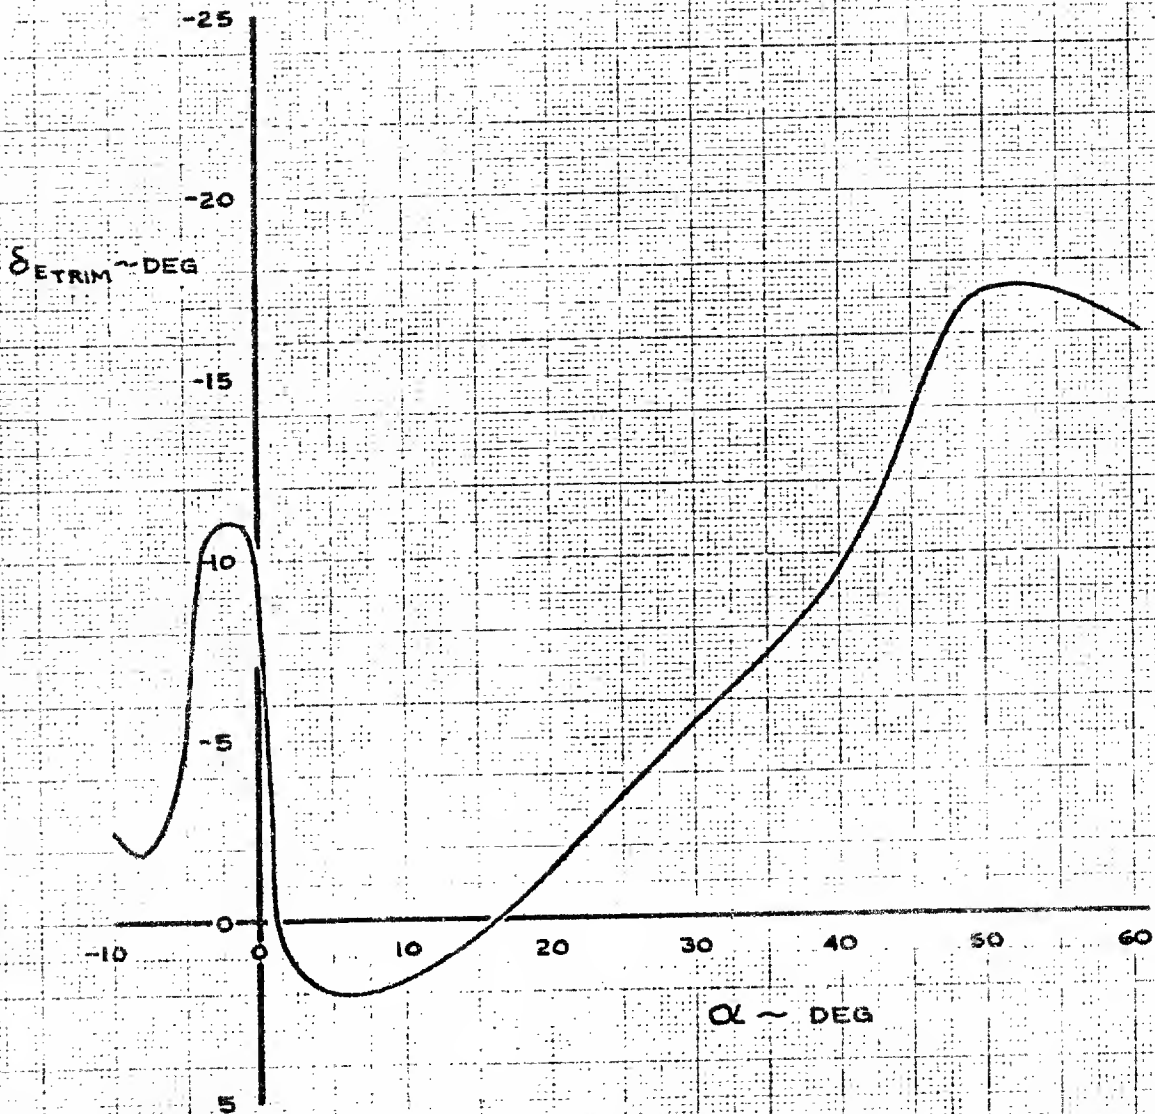


FIG. C.41

CALC	J.L. FRANCIS	11-9-61	REVISED	DATE
CHECK				
APR				
APR				
TRACE	N.U.	11-9-61		

ELEVON REQUIRED
TO TRIM
 $M = 8.08$

THE BOEING COMPANY

844-
2050 D

D2-60065

PAGE
6.48

CONFIDENTIAL

CONFIDENTIAL

$M = 9.0$

RIGID GLIDER

HOT SHAPE

$R_{NE} = 4.5 \times 10^5$

ALTITUDE $\approx 195,000$ FT

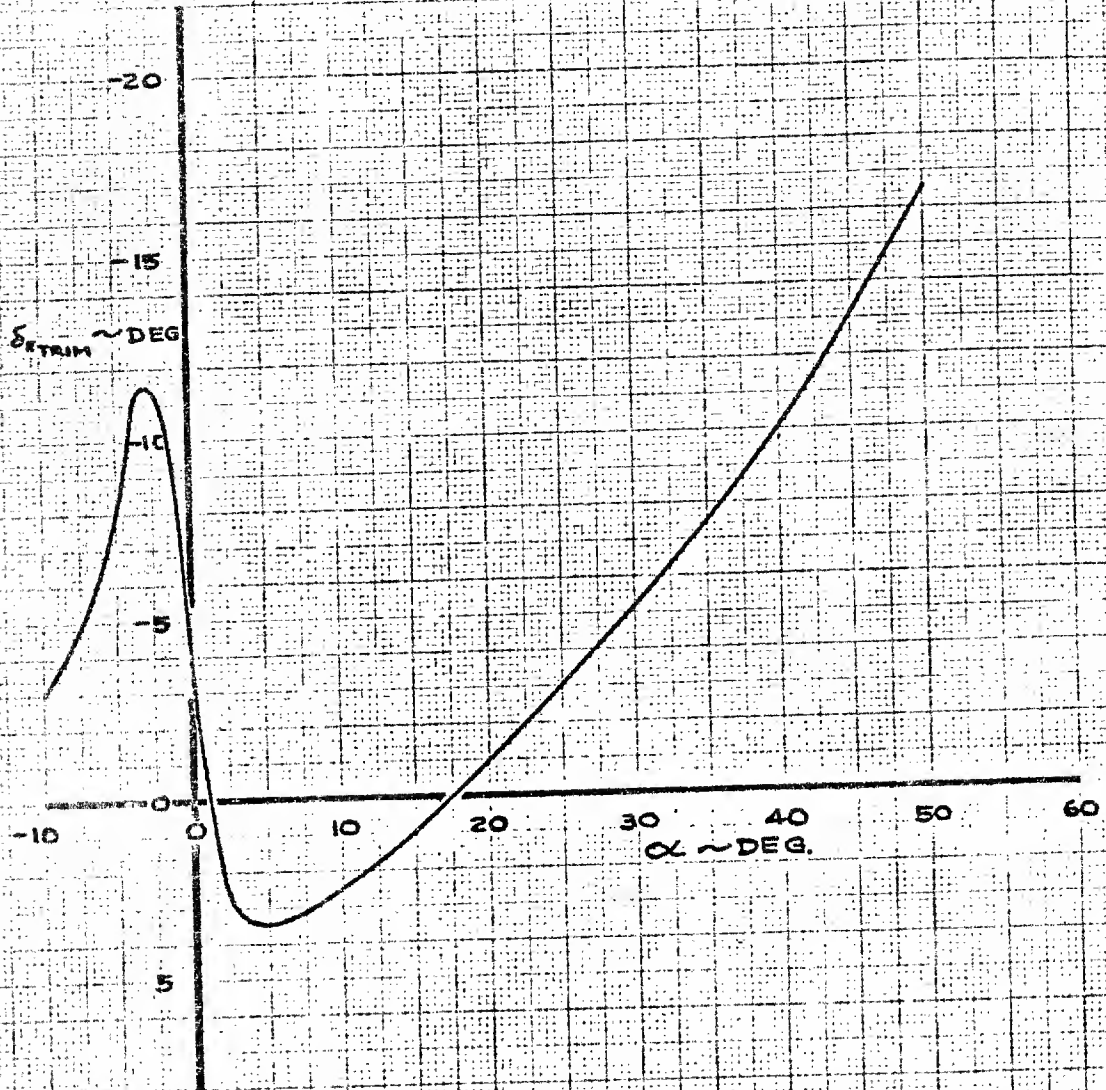


FIG. 6.42

CALC	JL FRANCIS	12-11-1	REVISED	DATE
CHECK			12/2/1	
APR				
APR				

ELEVON REQUIRED
TO TRIM
 $M = 9.0$ LOW R_{NE}

THE BOEING COMPANY

844-
2050 D
02-80065
PAGE
6.49

CONFIDENTIAL

~~CONFIDENTIAL~~

$M = 9.0$

RIGID GLIDER

HOT SHAPE

$R_{N\bar{C}} = 5.1 \times 10^5$

ALTITUDE $\approx 180,000$ FT

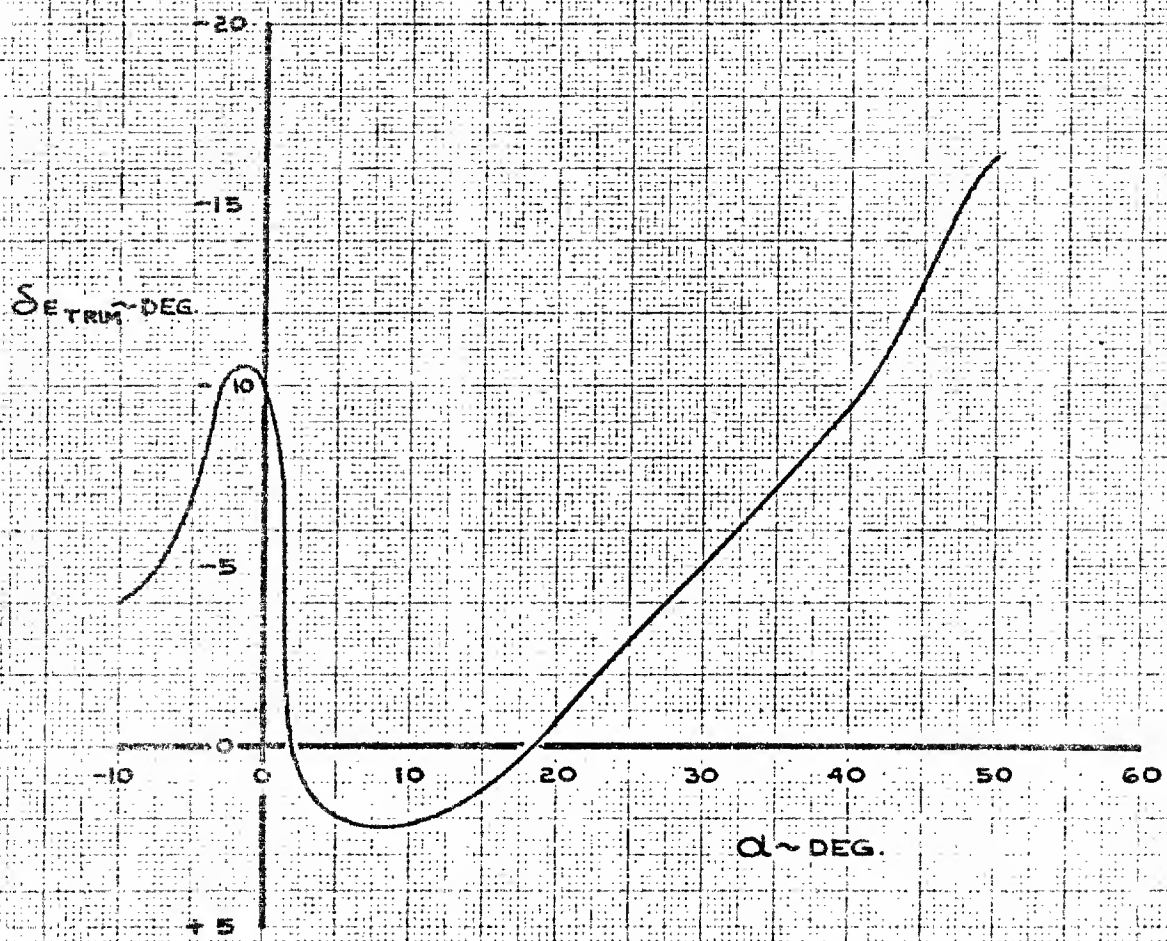


FIG. 6.43

CALC	J.L. FRANCIS	11-10-61	REVISED	DATE
CHECK			12-27-61	
APR				
APR				
DRM	MIL	11-10-61		

ELEVON REQUIRED
TO TRIM
 $M = 9.0$

THE BOEING COMPANY

844-
2050 D
D2-80065
PAGE
6.50

~~CONFIDENTIAL~~

$M=11.0$

RIGID GLIDER
HOT SHAPE
 $R_{N2} = 4.5 \times 10^5$
ALTITUDE $\approx 125,000$ FT.

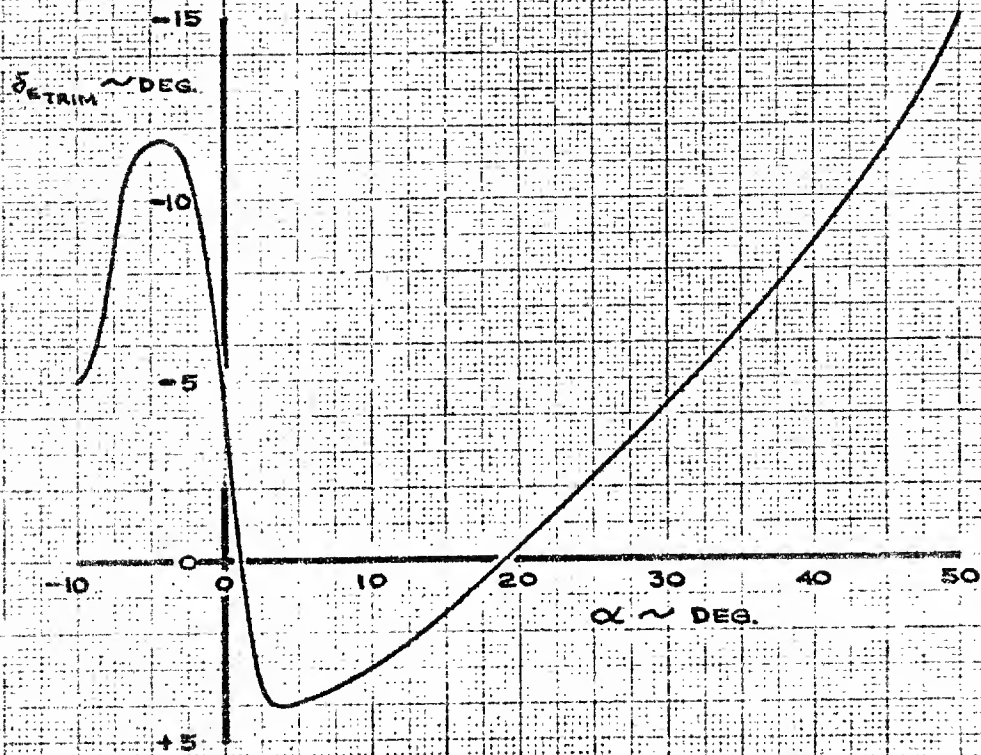


FIG. G.44

CALC	J.L. FRANCIS	11/14/61	REVISED	DATE
CHECK			12/2/61	
APR				
APR				

ELEVON REQUIRED
TO TRIM
 $M=11.0$

THE BOEING COMPANY

844-
2050 D
12-80005
PAGE
6.51

CONFIDENTIAL

$M=16.0$

RIGID GLIDER

HOT SHAPE

$R_{NE} = .164 \times 10^6$

ALTITUDE $\approx 236,000$ FT.

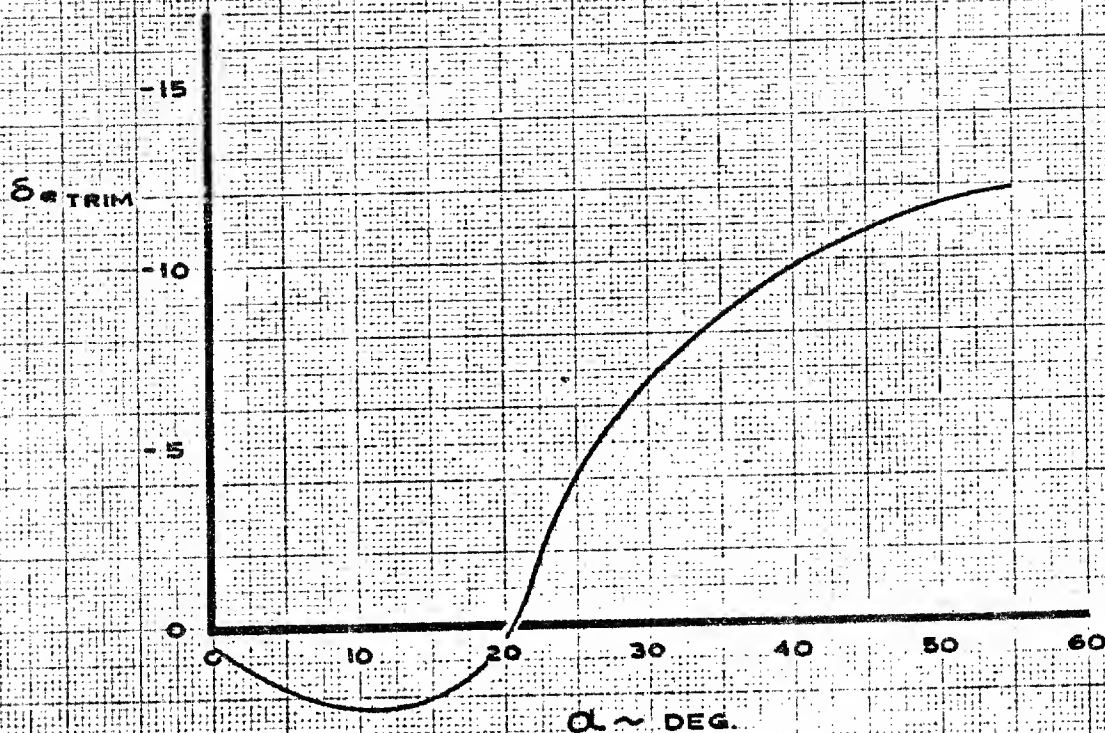


FIG. 6.45

CALC	Emp	11/10/61	REVISED	DATE
CHECK			2-22-61	
APR				
APR				
TRACE	11/17/61			

ELEVON REQUIRED TO TRIM
 $M=16.0$

THE BOEING COMPANY

844-2050 D
DR-80065
PAGE 6.52

$M=22$

RIGID GLIDER

HOT SHAPE

$R_{H/C} = .066 \times 10^6$

ALTITUDE \approx 263,000 FT.

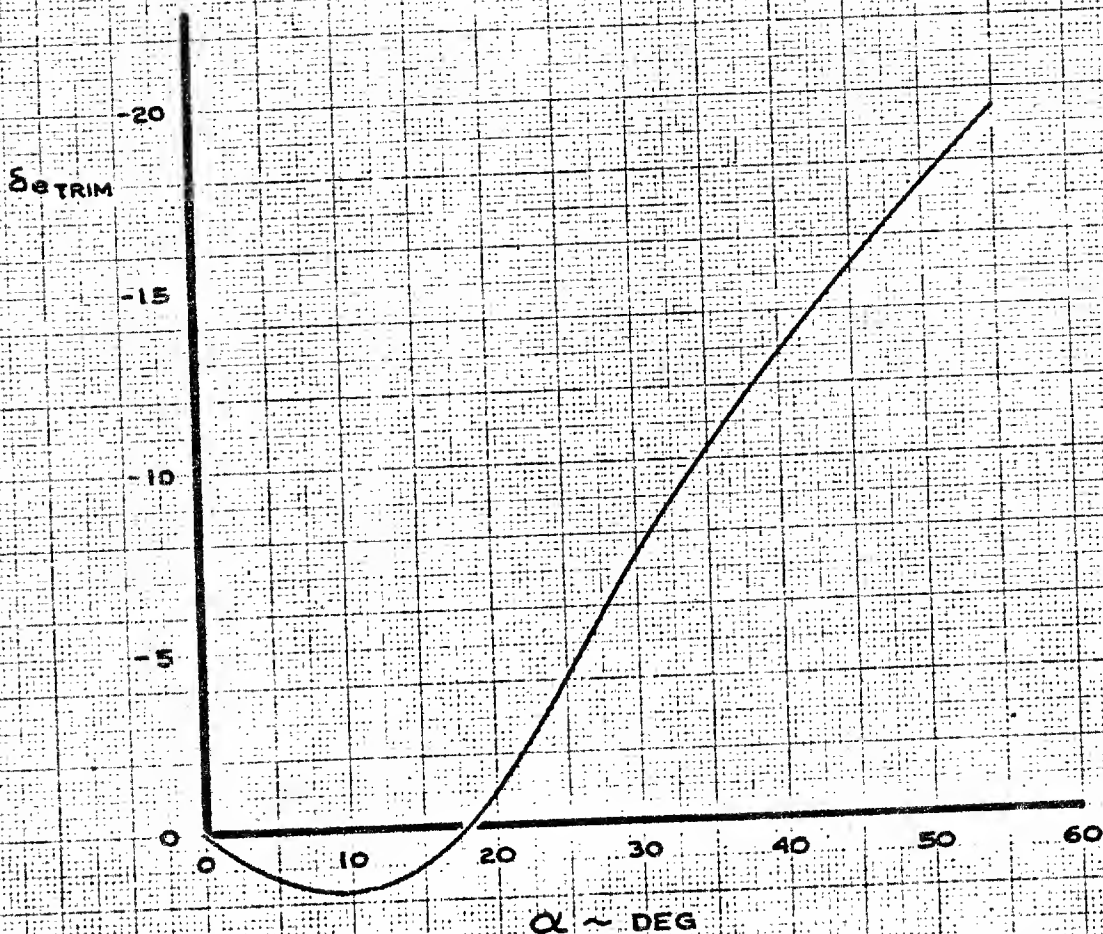


FIG. 6-46

CALC	Emg	11/8/61	REVISED	DATE
CHECK				
APR				
APR				
TRACE				

ELEVON REQUIRED TO TRIM

$M=22$

THE BOEING COMPANY

844 -
2050 D
DR-80065
PAGE
6.53

6.46

127

CONFIDENTIAL

NOTE: 10° ELEVON DEFLECTION
ABOUT TRIM POSITION

$M = 8.08$

RIGID GLIDER
HOT SHAPE

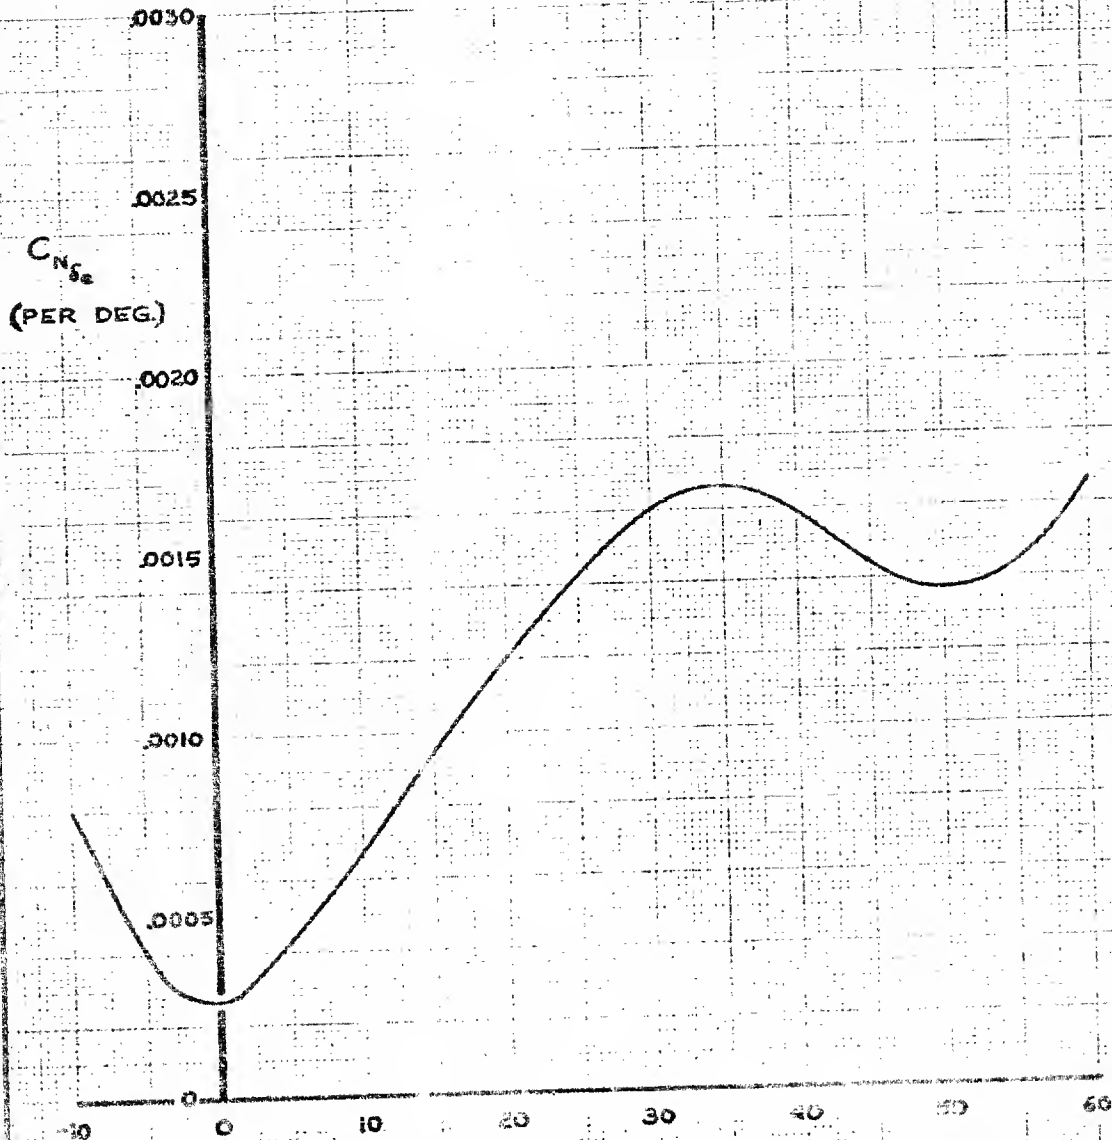


FIG. C.47

CALC	CHK	REVISED	DATE
APR			
APR			

EFFECT OF ELEVON
ON NORMAL FORCE

$M = 8.08$

THE BOEING COMPANY

SP-1
2050 D
DR-80065
PAGE
6.54

CONFIDENTIAL

$M=22.0$

RIGID SLIDER

HOT SHAPE

$R_{NE} = 1.066 \times 10^6$

NOTE
CORRESPONDING ALTITUDES
FOR EQUILIBRIUM GLIDE:

1) $C_{L_{MAX}} \sim 263,000$ FT.

2) $(L/D)_{MAX} \sim 266,000$ FT.

C_{NS_e}
(PER DEG)

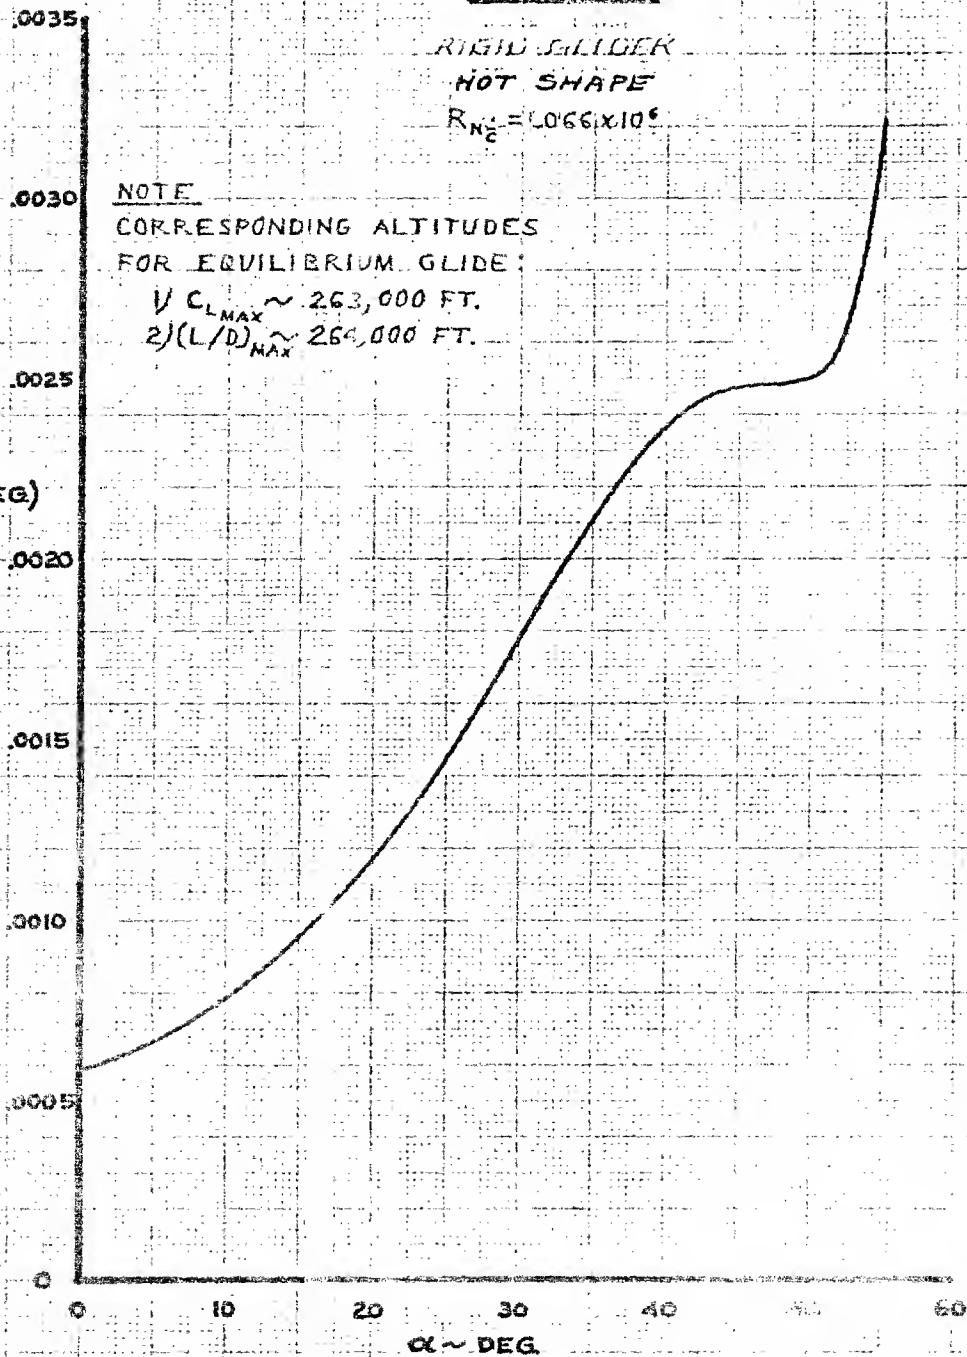


FIG. C-48

CALC		REVISED	DATE
CHECK			
APR			
APR			

EFFECT OF ELEVON
ON NORMAL FORCE
 $M=22.0$

THE BOEING COMPANY

PAGE
6.55

CONFIDENTIAL

$M = 6.0$

NOTE: SLOPES TAKEN
AT TRIM δ_e

RIGID GLIDER
HOT SHAPE
 $R_{NE} = 8.1 \times 10^5$

ALTITUDE $\approx 16,500$ FT.

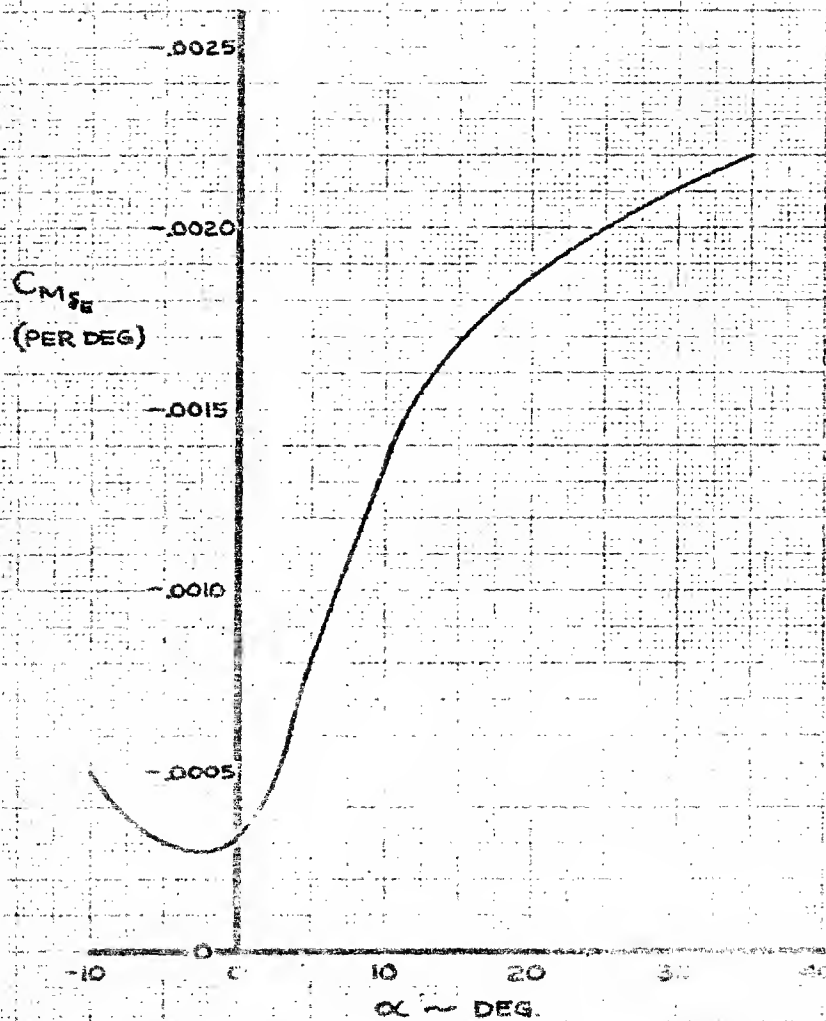


FIG. C.49

CALC	J.L.F.		REVISED	DATE	ELEVON EFFECTIVENESS ABOUT TRIM $M = 6.0$ THE BOEING COMPANY	244-
CHECK						2050 D
APR						02-89065
APR						PAGE
						6.56

CONFIDENTIAL

NOTE: SLOPE TAKEN
AT TRIM δ_e

M=8.0

RIGID GLIDER
HOT SHAPE

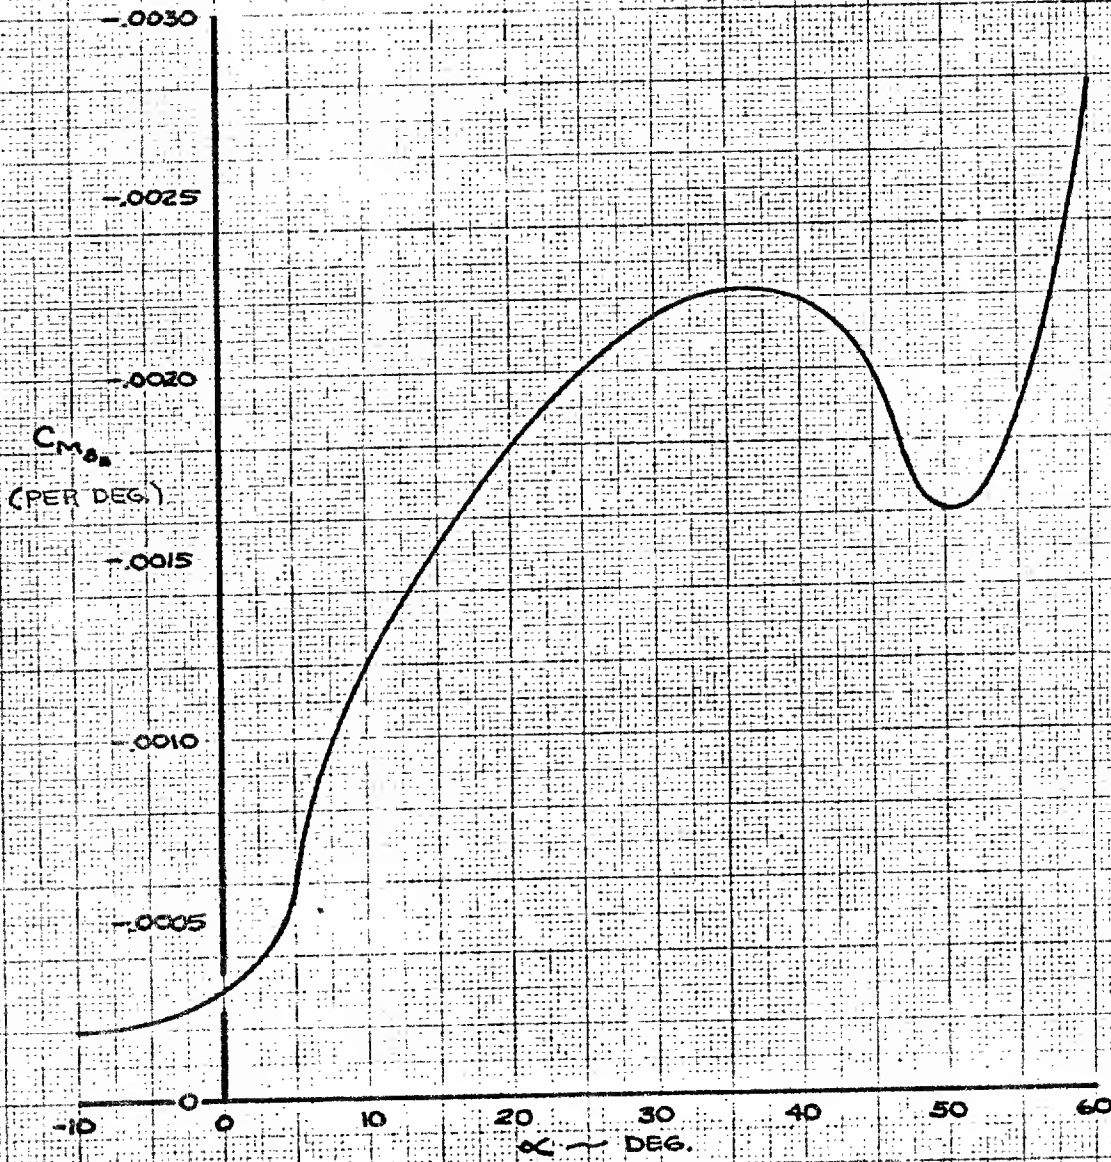


FIG. 6-50

CALC	J.L. FRANCIS	12/15/61	REVISED	DATE
CHECK			12-1-61	
APR				
APR				

ELEVON EFFECTIVENESS
ABOUT TRIM
M=8.0

THE BOEING COMPANY

B44-
2050, D
D2-80065
PAGE
6.57

CONFIDENTIAL

CONFIDENTIAL

M=9.0

NOTE: SLOPE TAKEN
AT TRIM δ

RIGID GLIDER
HOT SHAPE
 $R_{N2} = 4.5 \times 10^5$
ALTITUDE $\approx 195,000$ FT.

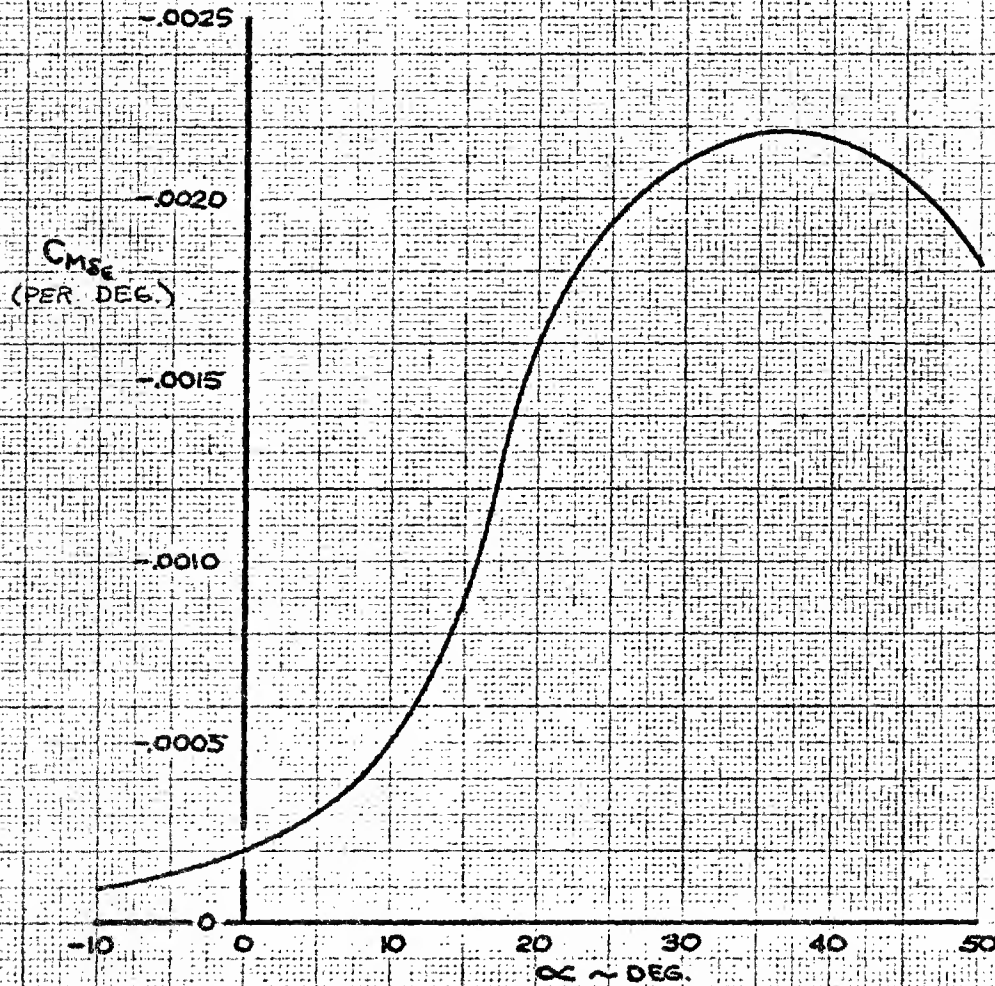


FIG. 6.51

CALC	J.L. FRANCIS	12/13/61	REVISED	DATE
CHECK				
APR				
APR				

ELEVON EFFECTIVENESS
ABOUT TRIM
M=9.0 - LOW R_{N2}

THE BOEING COMPANY

844-
2050 D
D2-80065
PAGE
6.58

CONFIDENTIAL

$M = 9.0$

NOTE: SLOPE TAKEN
AT TRIM δ_e

RIGID GLIDER
HOT SHAPE
 $R_{N_2} = 8.1 \times 10^5$
ALTITUDE $\approx 189,000$ FT

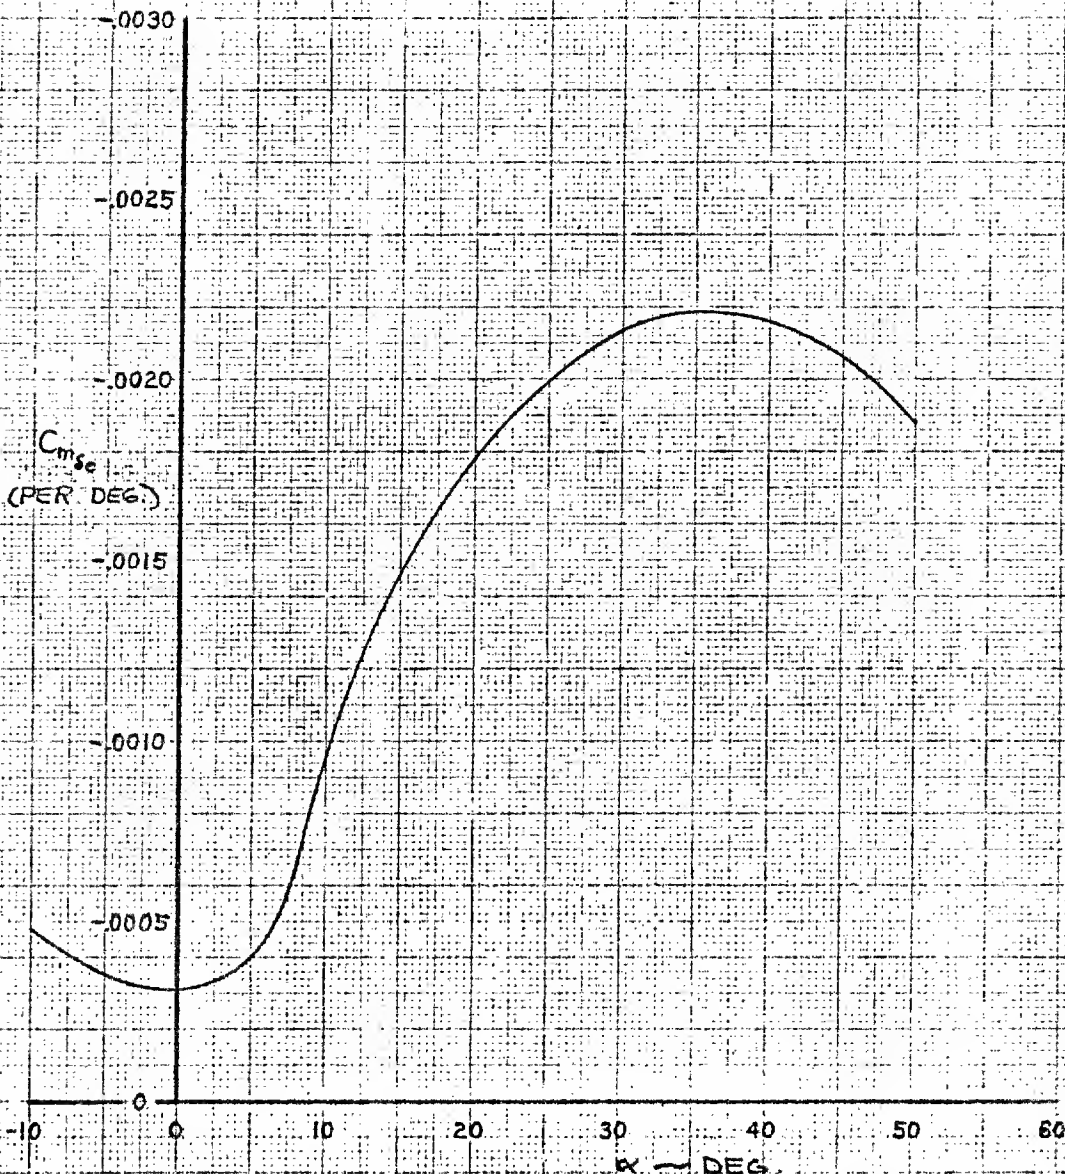


FIG. C.52

CALC	E.M.P.	REVISED	DATE
CHECK		12-5-71	
APR			
APR			

ELEVON EFFECTIVENESS
ABOUT TRIM
 $M = 9.0$

844-
2050 D
02-80065

THE BOEING COMPANY

PAGE
6.59

CONFIDENTIAL

CONFIDENTIAL

$M=11$

NOTE: SLOPES TAKEN
AT TRIM α

RIGID GLIDER
NOT SHAPE
 $R_{N2} = 4.5 \times 10^5$
ALTITUDE $\approx 195,000$ FT

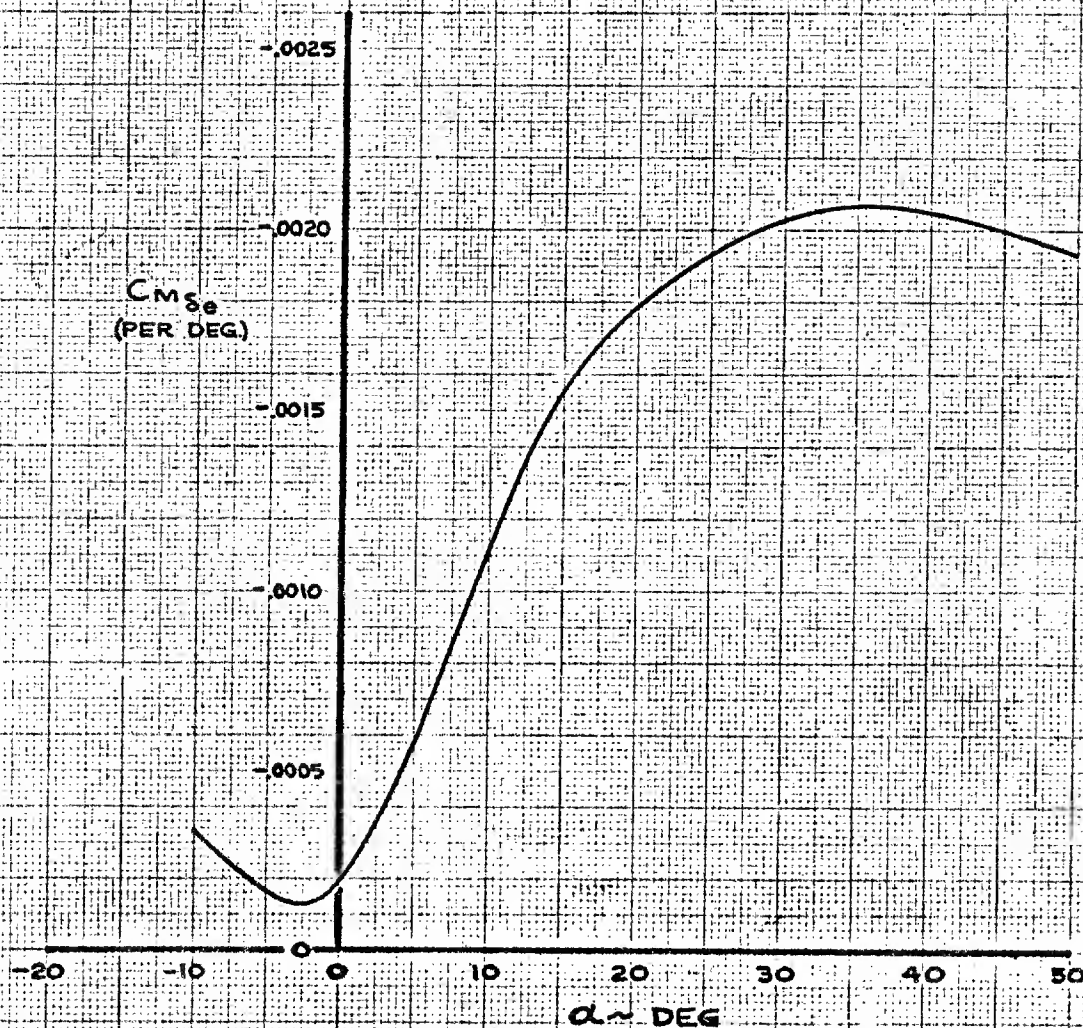


FIG. 6.53

CALC	EMIP	REVISED	DATE
CHECK			
APR			
APR			
PLOT	NU		

ELEVON EFFECTIVENESS
ABOUT TRIM
 $M=11$

THE BOEING COMPANY

PAGE
C.60

CONFIDENTIAL

NOTE: SLOPES TAKEN
AT TRIM δ_e

CONFIDENTIAL

M=16

RIGID GLIDER
HOT SHAPE

$R_{NE} = 164 \times 10^6$

ALTITUDE $\approx 236,000$ FT.

$C_{m\delta_e}$
(PER DEG)

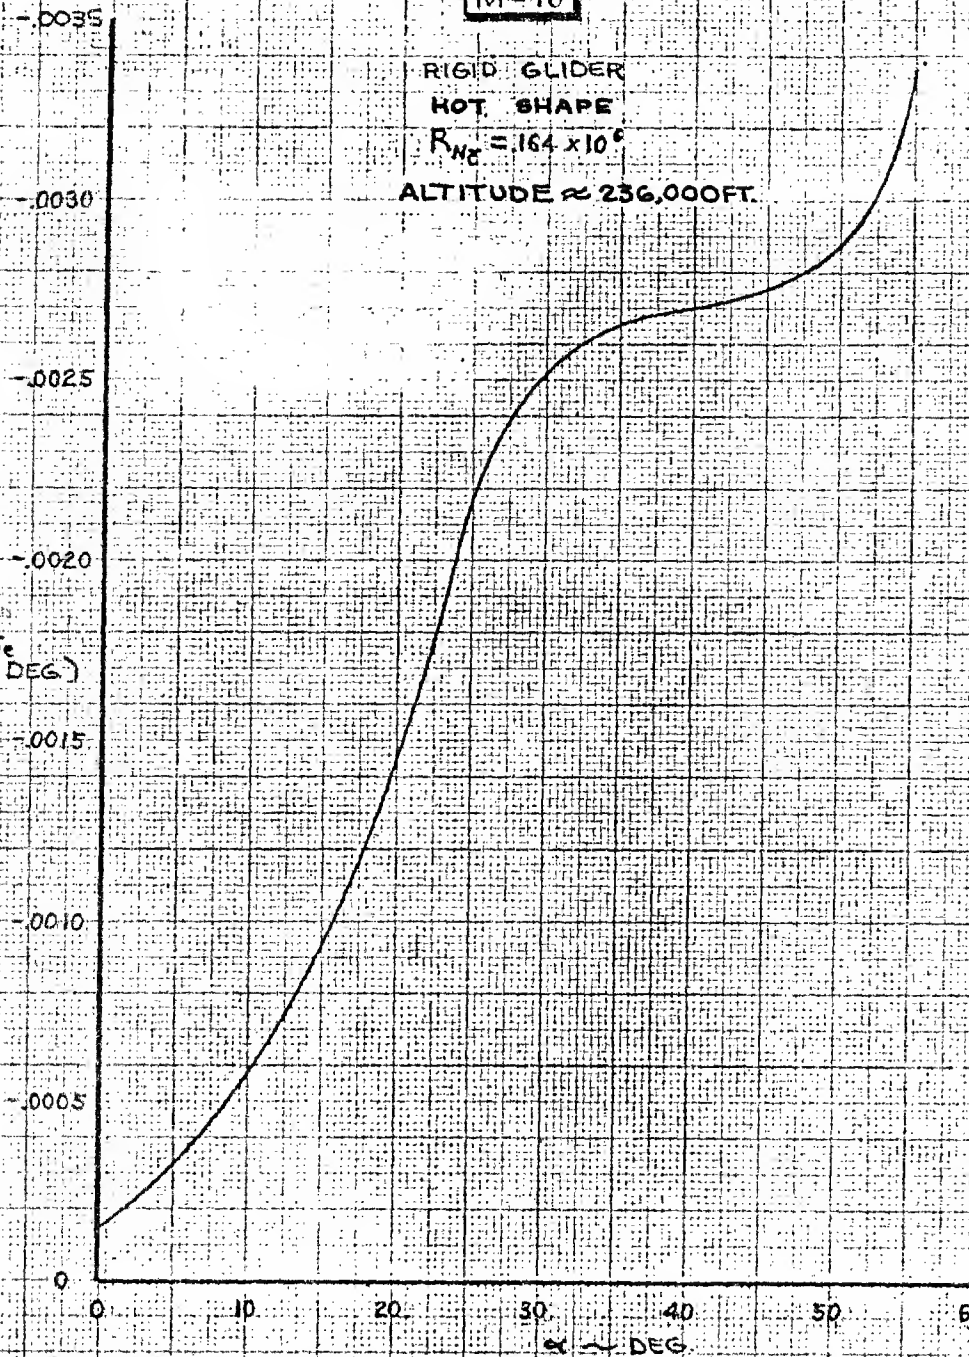


FIG. 6.54

CALC	E.M.P.		REVISED	DATE
CHECK				
APR				
APR				

ELEVON EFFECTIVENESS
ABOUT TRIM
M=16

THE BOEING COMPANY

844 -
2050 D
D2-80065
PAGE
6.61

CONFIDENTIAL

NOTE: SLOPES TAKEN
AT TRIM δ_e

$M=22$

RIGID GUIDER
HOT SHAPE

$R_{N2} = 1066 \times 10^6$

ALTITUDE $\approx 263,000$ FT.

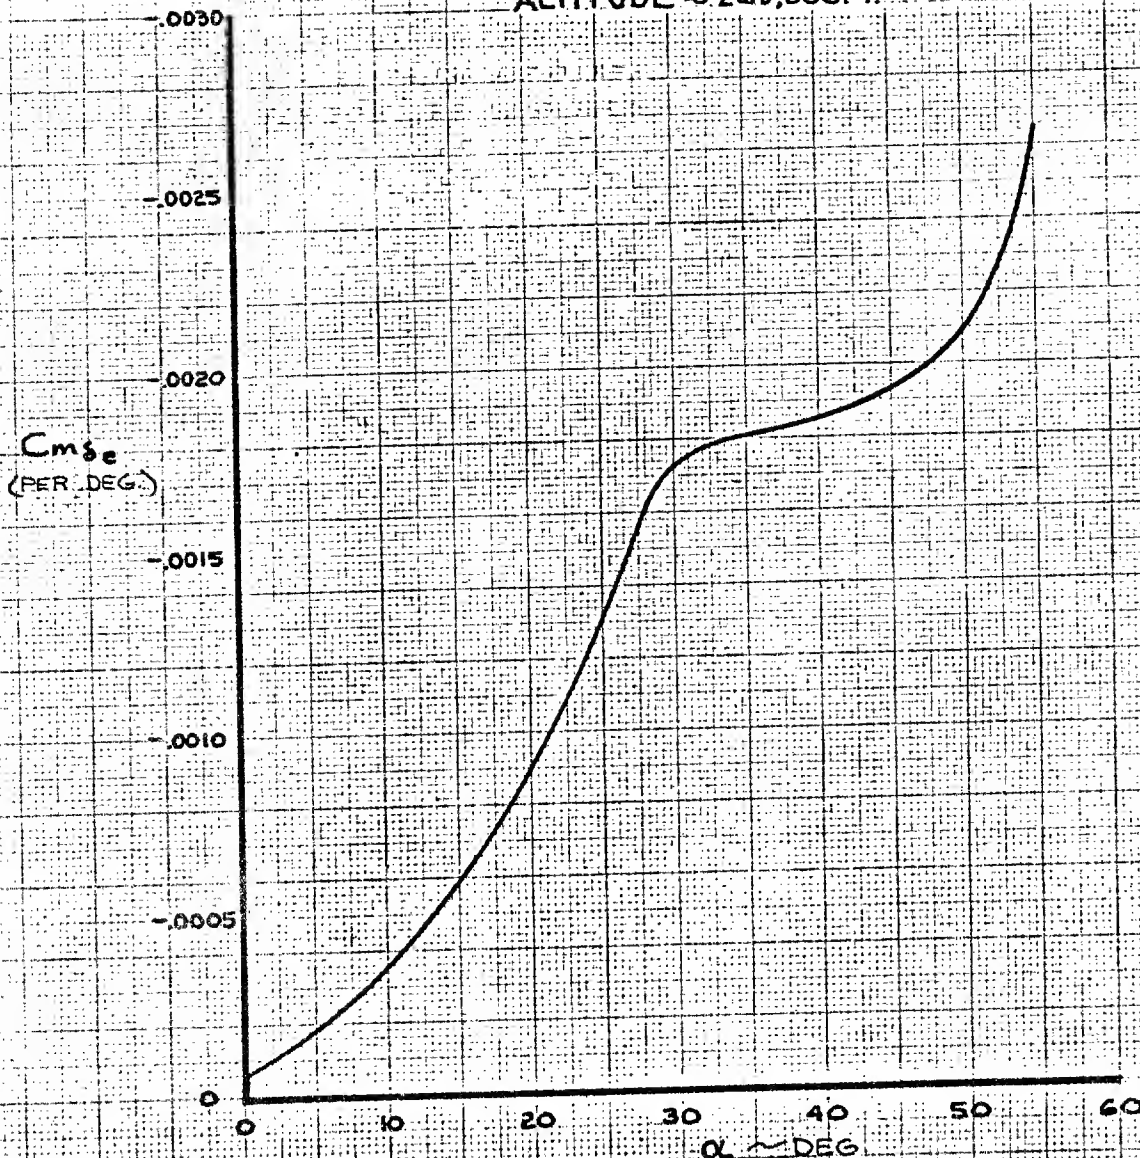


FIG. 6.55

CALC	E.M.P.		REVISED	DATE
CHECK			12-20-71	
APR				
APR				

ELEVON EFFECTIVENESS
ABOUT TRIM
 $M=22$

THE BOEING COMPANY

644 -
2050 D
D2-80065
PAGE
6.62

CONFIDENTIAL

CONFIDENTIAL

$M=6.0$

RIGID GLIDER
NOT SHAPED
 $RNE = 8.1 \times 10^5$

ALTITUDE $\approx 165,000$ FT.

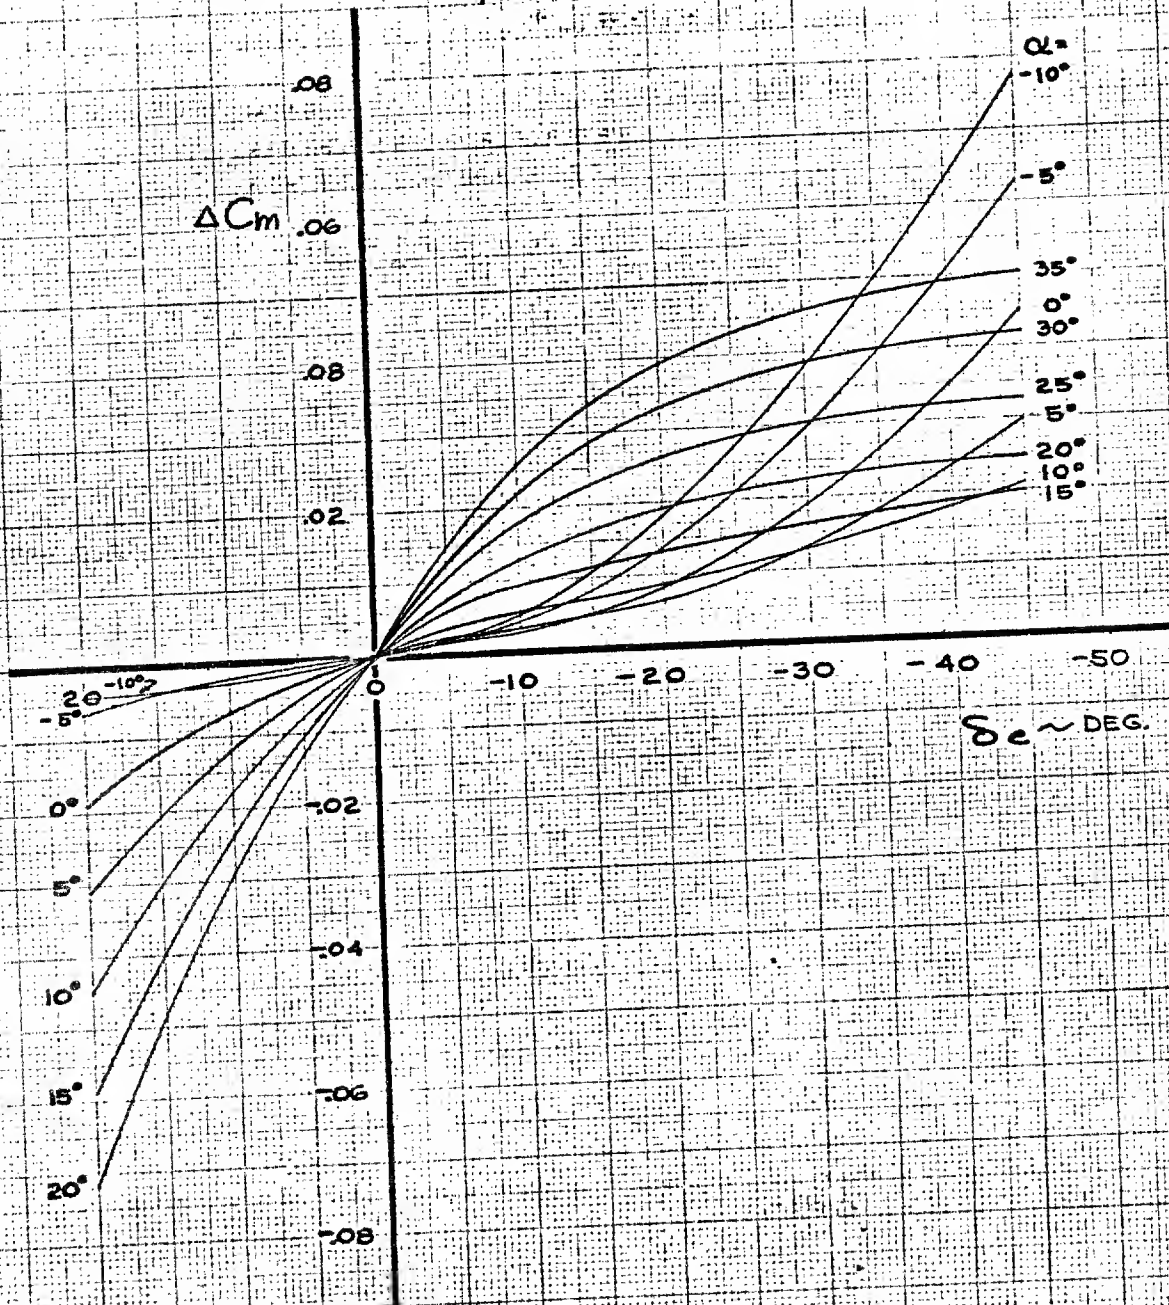


Fig. 6.56

CALC	N.O.	REVISED	DATE
CHECK		12-1-61	
APR			
APR			

ELEVON EFFECTIVENESS
 $M = 6.0$

THE BOEING COMPANY

844 -
2050 D
02-80065
PAGE
6.63

CONFIDENTIAL

CONFIDENTIAL

M=8.0

RIGID GLIDER
HOT SHAPE

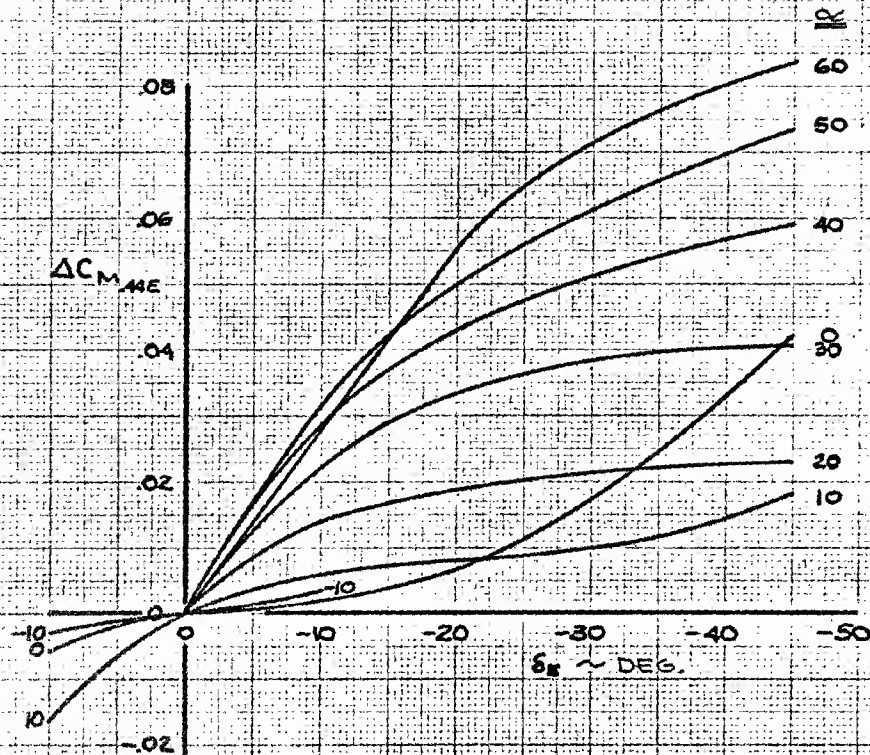


Fig. 6.57

CALC	J.L.FRANCIS	12/13/61	REVISED	DATE	ELEVON EFFECTIVENESS M=8.0	844- 2050 D
CHECK						DZ-B00065
APR						
APR						
					THE BOEING COMPANY	PAGE 6.64

US 4013 8000

M=8

CONFIDENTIAL

ALBANY 1961 68587

CONFIDENTIAL

M = 9.0

RIGID GLIDER
NOT SHAPED
 $RN_2 = 4.5 \times 10^5$

ALTITUDE $\approx 195,000$ FT

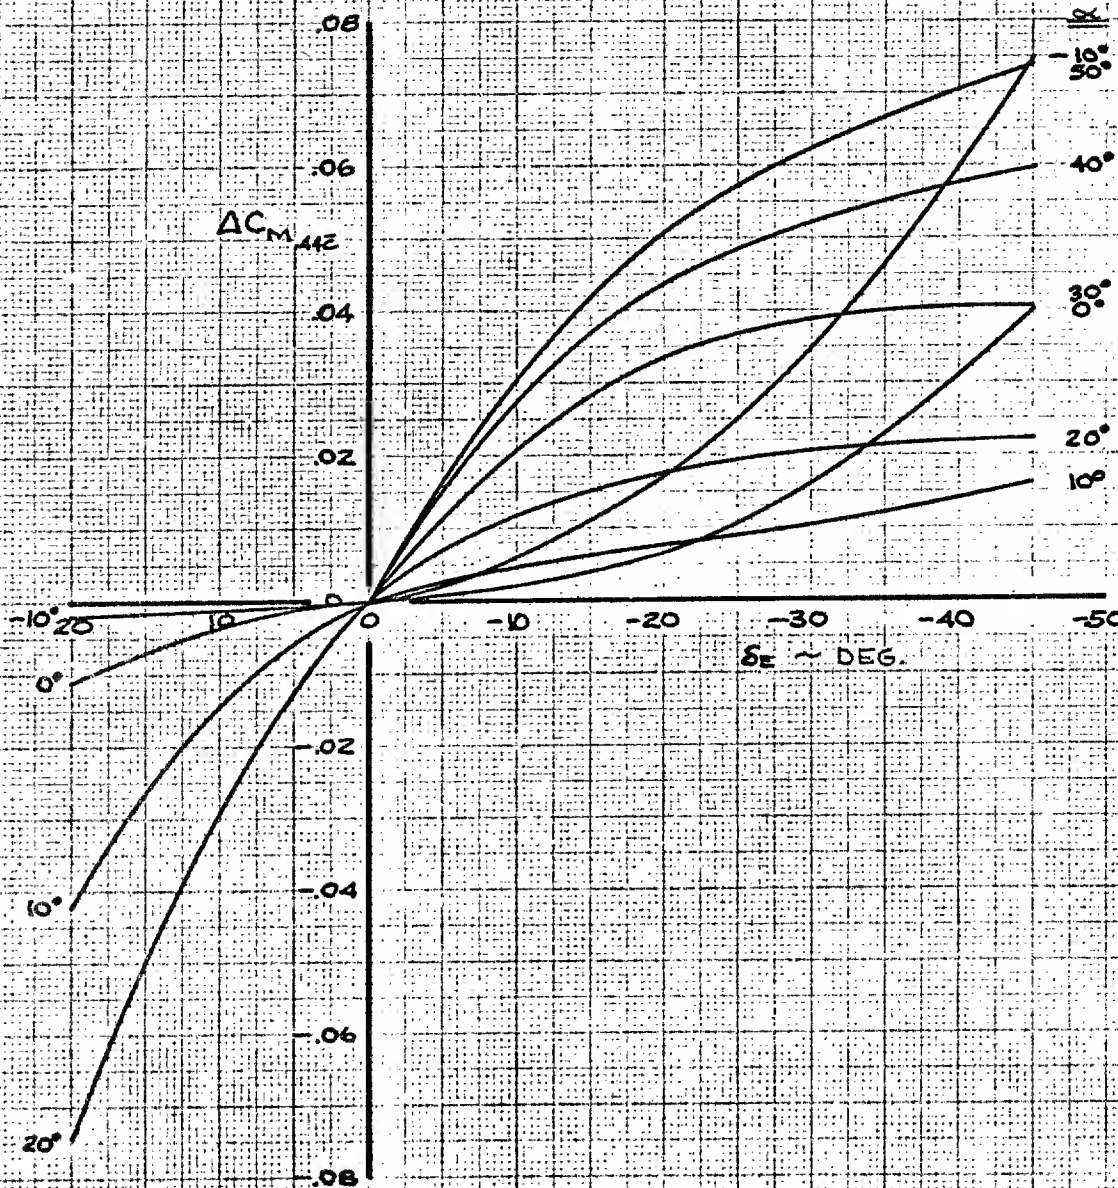


FIG. 6.58

CALC	J.L. FRANCIS	12/13/61	REVISED	DATE
CHECK			12-2-61	
APR				
APR				

ELEVON EFFECTIVENESS
 $M = 9.0$ - LOW RN_2

THE BOEING COMPANY

E44 -
2080.0
D2-80065
PAGE
6.65

CONFIDENTIAL

CONFIDENTIAL

$M = 9.0$

RIGID GLIDER
HOT SHAPE
 $R_N = 8.1 \times 10^5$

ALTITUDE $\approx 180,000$ FT.

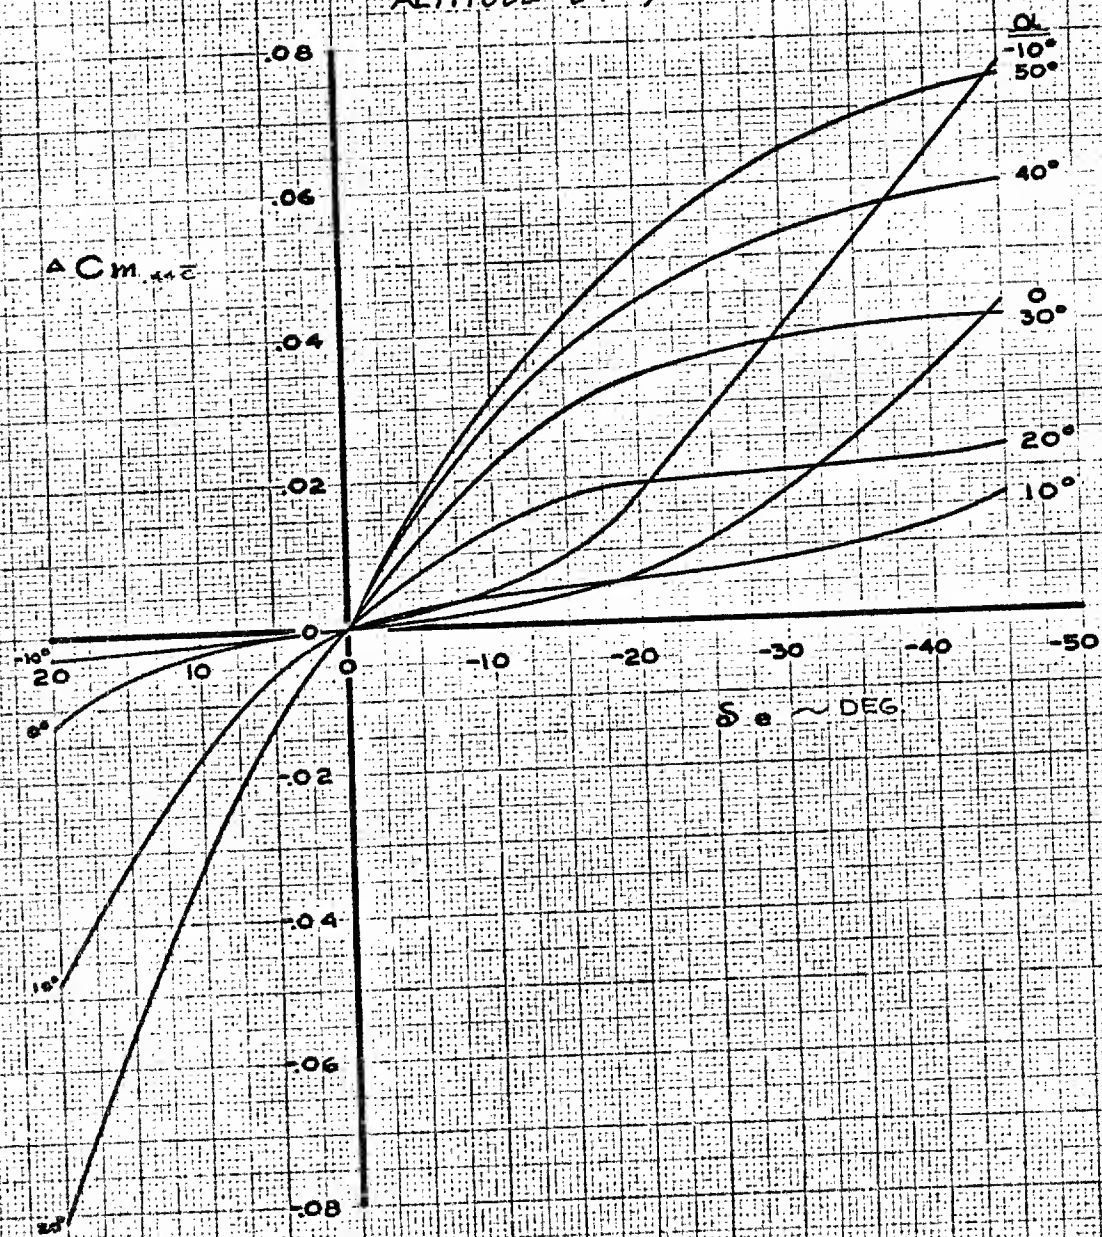


FIG. 6.59

CALC	G.D.K.	REVISED	DATE
CHECK		12-20-51	
APR			
APR			

ELEVON EFFECTIVENESS
 $M = 9.0$

THE BOEING COMPANY

844-2050 D
02-80065
PAGE 6.66

CONFIDENTIAL

CONFIDENTIAL

RIGID GLIDER
NOT SHAPED
 $R_N = 4.5 \times 10^5$

ALTITUDE $\approx 195,000$ FT.

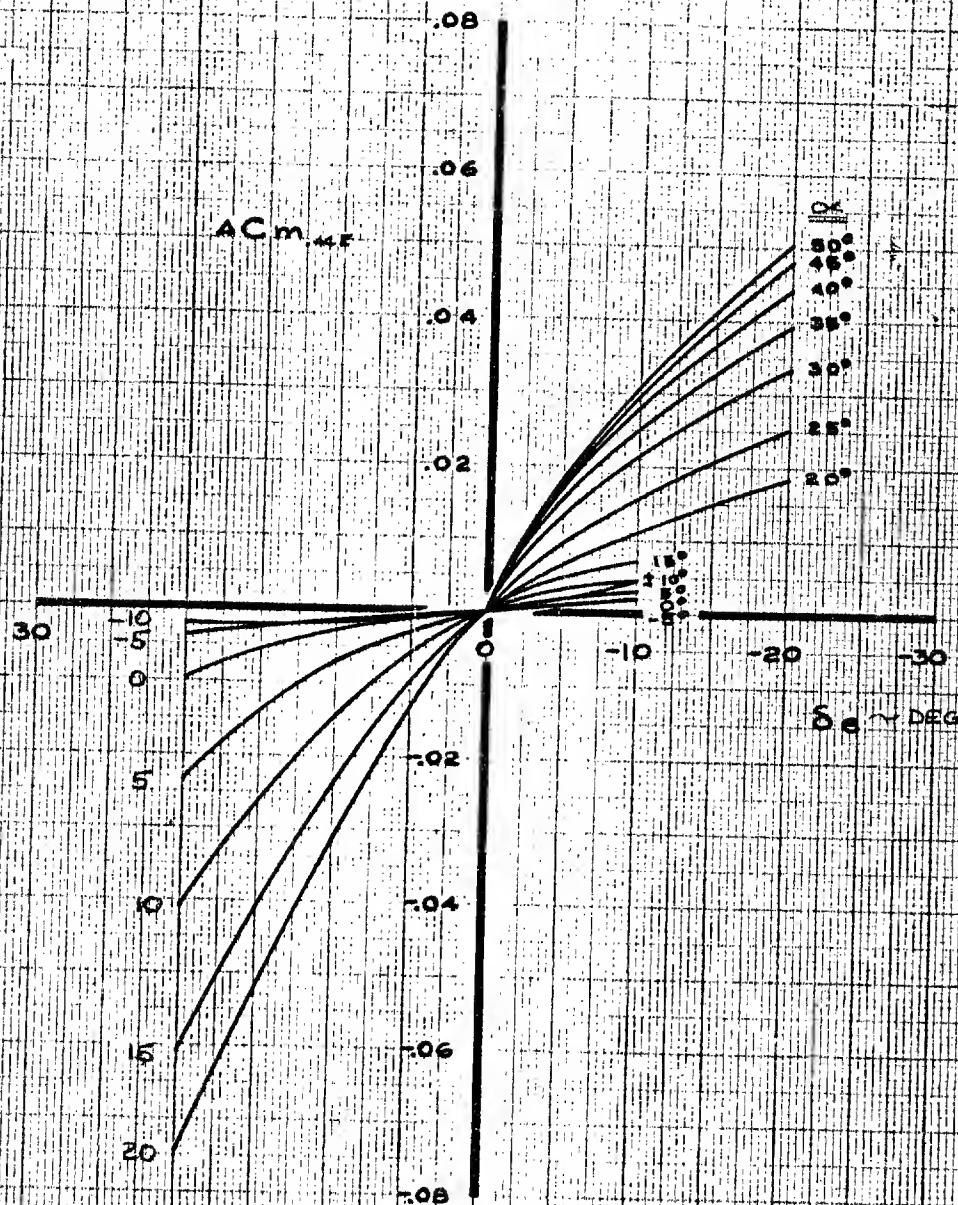


FIG. 6.60

CALC	EM.P.	REVISED	DATE	ELEVON EFFECTIVENESS $M = 11$	844 -
CHECK		12-20-1			2050 D
APR					D2-80065
APR					PAGE 6.67
				THE BOEING COMPANY	

CONFIDENTIAL

M=16

RIGID GLIDER

HOT SHAPE

$R_{Nc} = .164 \times 10^6$

ALTITUDE $\approx 236,000$ FT.

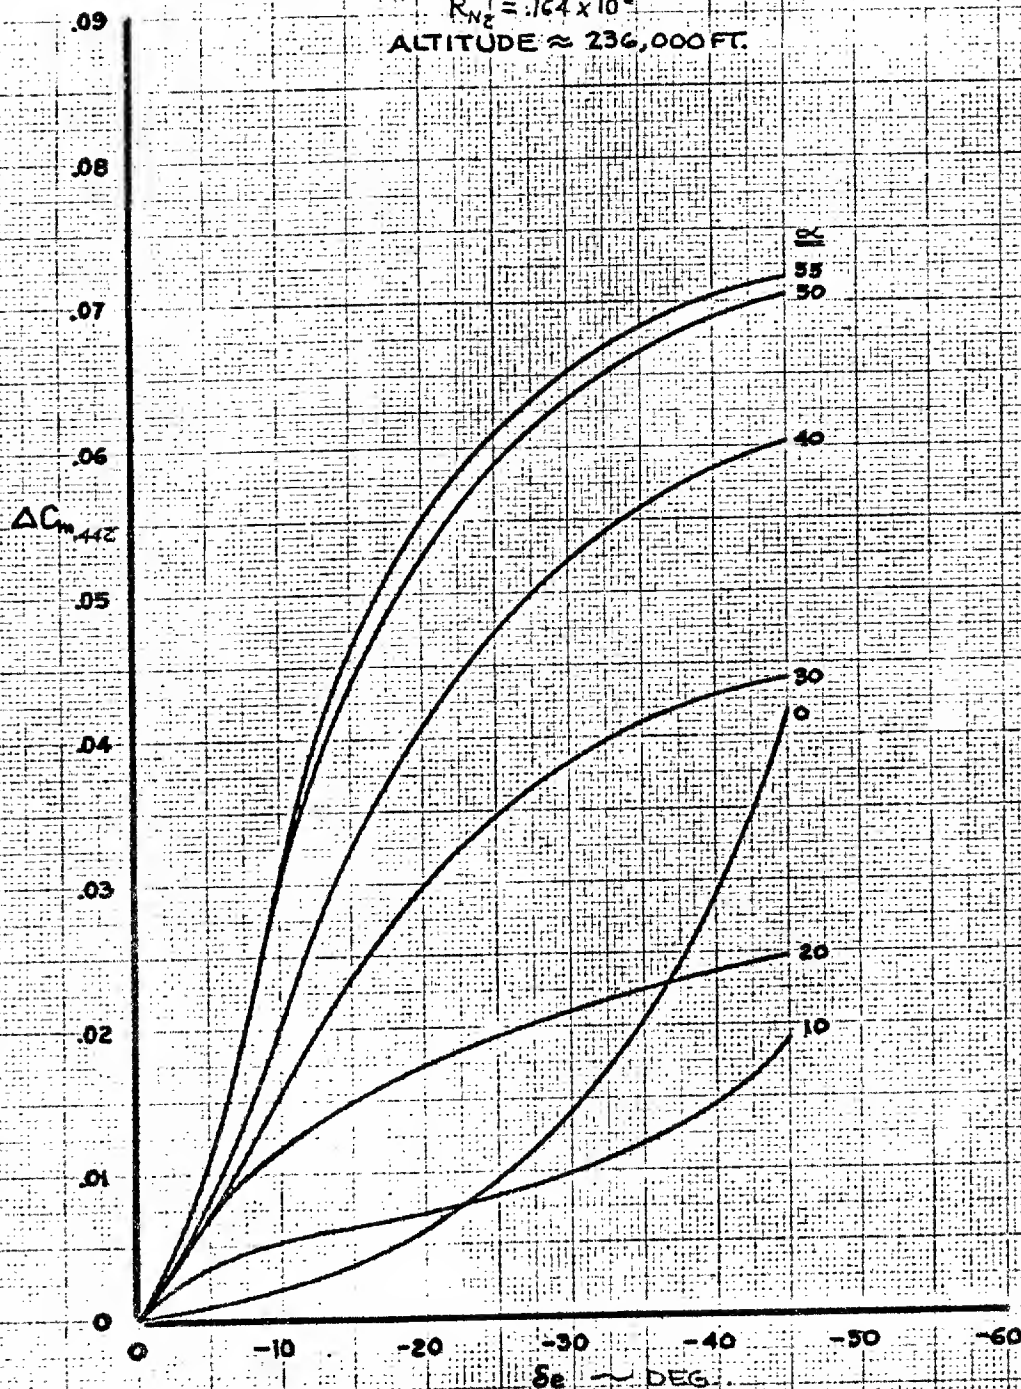


FIG. 6.61

CALC	E.M.P.	REVISED	DATE
CHECK		J.L.F.	12/10/61
APR		12-20-61	
APR			

ELEVON EFFECTIVENESS

M=16

THE BOEING COMPANY

844-
2050 D
02-80068
PAGE
6.68

CONFIDENTIAL

142

CONFIDENTIAL

M=22

RIGID GLIDER

HOT SHAPE

$R_{NE} = .066 \times 10^4$

ALTITUDE $\approx 263,000$ FT.

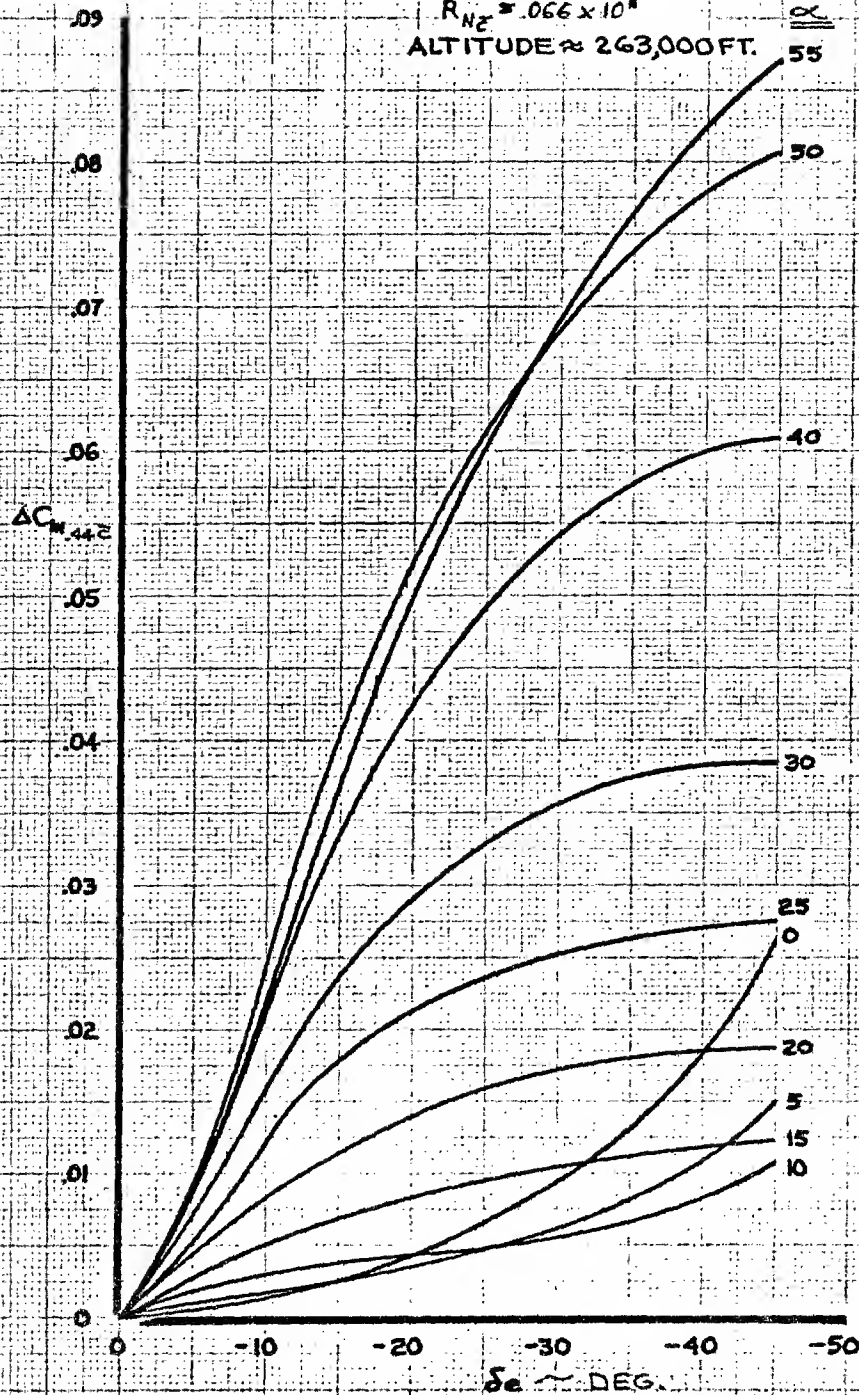


FIG. 6.62

CALC	E.M.P.		REVISED	DATE
CHECK			12-2-51	
APR				
APR				

ELEVON EFFECTIVENESS

M=22

THE BOEING COMPANY

B44-2050 D
D2-80065
PAGE 6.69

CONFIDENTIAL**6.1.5 ELEVON AS AILERON - PITCH COUPLING**

Effects on normal force and pitching moment of symmetrical elevon deflections about a trim position for subsonic and supersonic speeds are shown in Figure 6.63. These curves are based on wind tunnel data and are applicable through 4 degrees aileron deflection. At larger aileron deflections non-linear characteristics appear.

Hypersonic aileron-pitch coupling effects are shown in Figures 6.64 and 6.65. These curves are based on faired wind tunnel data and are assumed linear to 10 degrees of aileron deflection.

The substantial increase in $C_{m_{\delta_a}}$ from supersonic to hypersonic speeds, Figures 6.63 and 6.64, is attributed primarily to the range of aileron deflections from which the slopes of non linear data were taken. At hypersonic speeds where dynamic pressure is low, a given roll response requires large aileron deflections. Therefore it is more desirable for simulator data inputs to define $C_{m_{\delta_a}}$ over a larger range of aileron deflections.

More refined derivatives can be derived for hypersonic speeds from the data presented in Figures 6.56 through 6.62. Each elevon or aileron should be treated independently. The effect in pitch can be determined by taking one-half the incremental moment between the trimmed elevon position and the deflected aileron position. Summing these two increments algebraically gives the total aileron effect on pitching moment.

CONFIDENTIAL

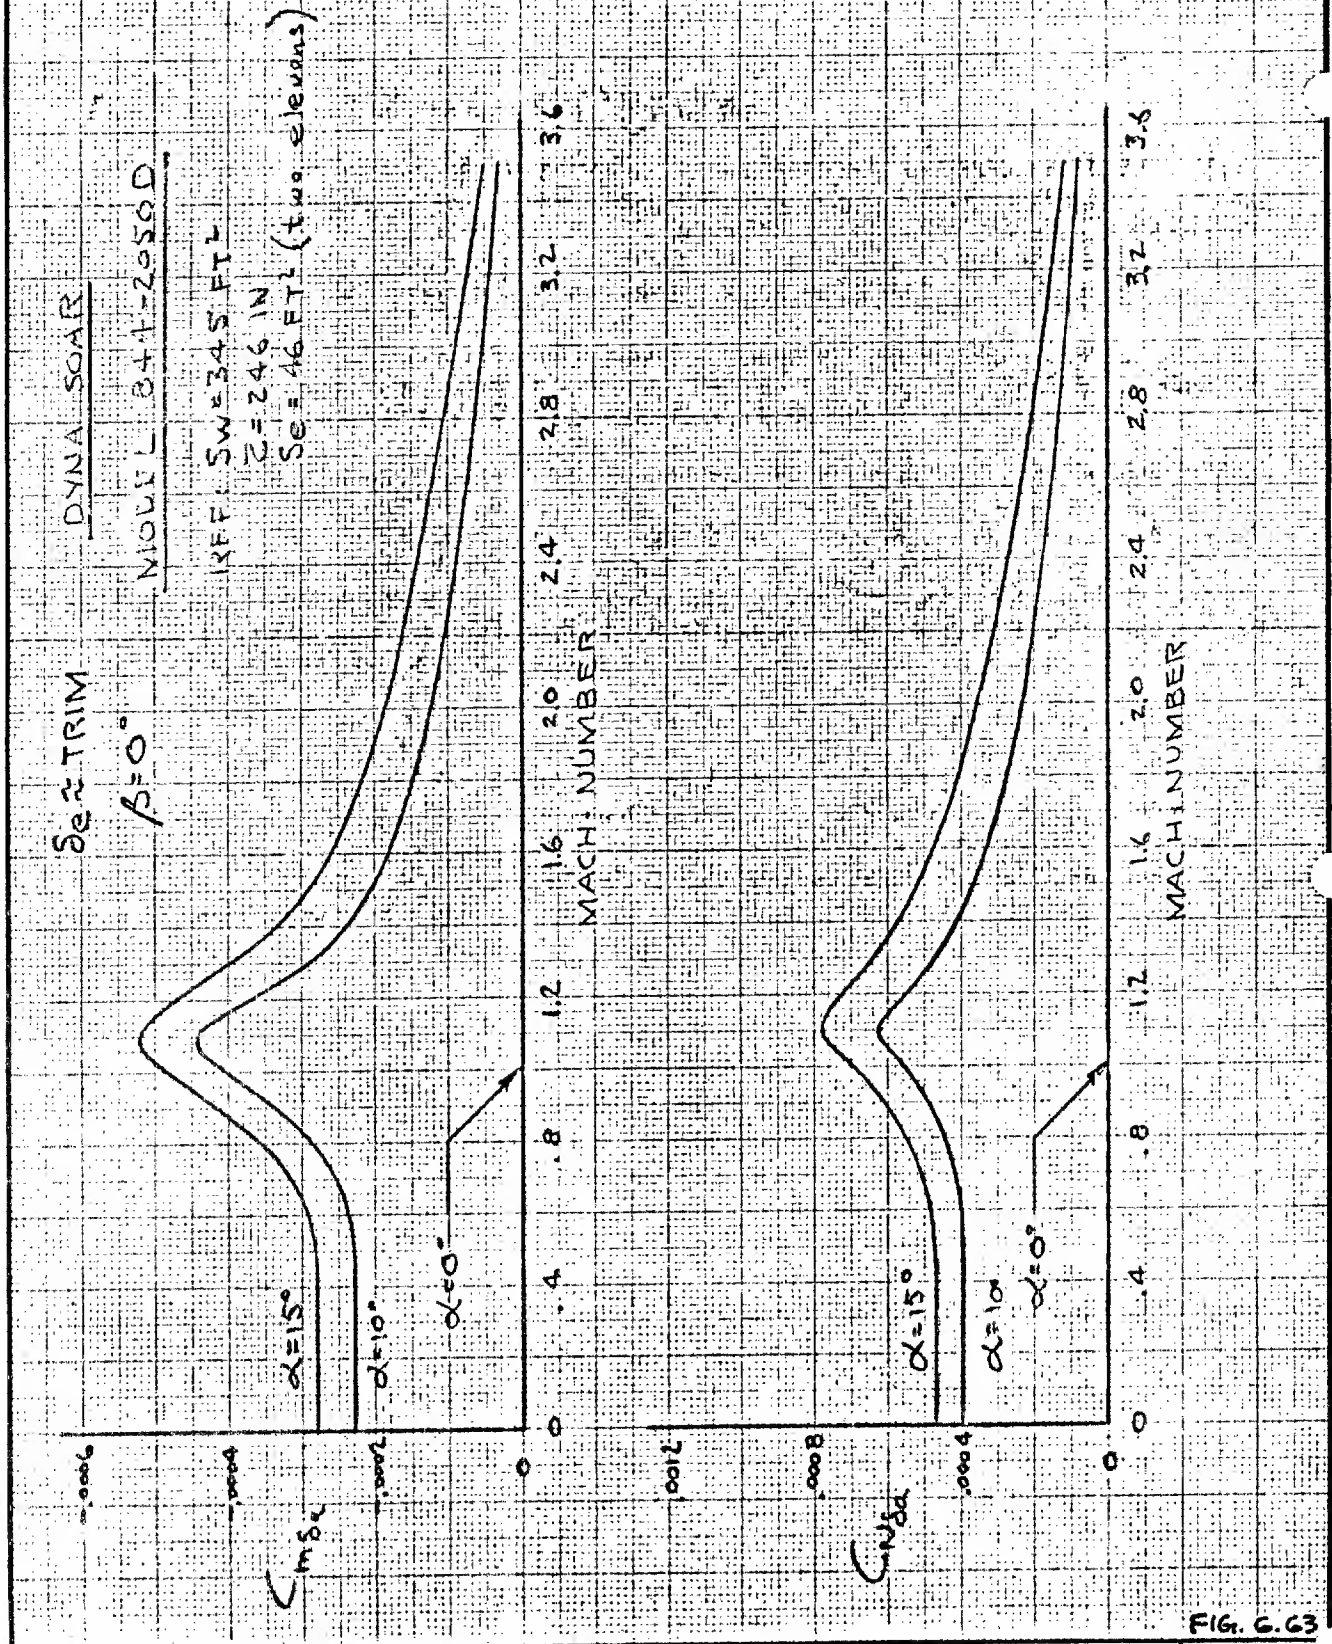


FIG. G.63

CALC	EVH	12/15/11	REVISED	DATE
CHECK			12-20-1	
APR				
APR				

AILERON/PITCH COUPLING
SUBSONIC THROUGH SUPERSONIC

844-2050D
DR-80065
PAGE 6.71

THE BOEING COMPANY

CONFIDENTIAL

CONFIDENTIAL

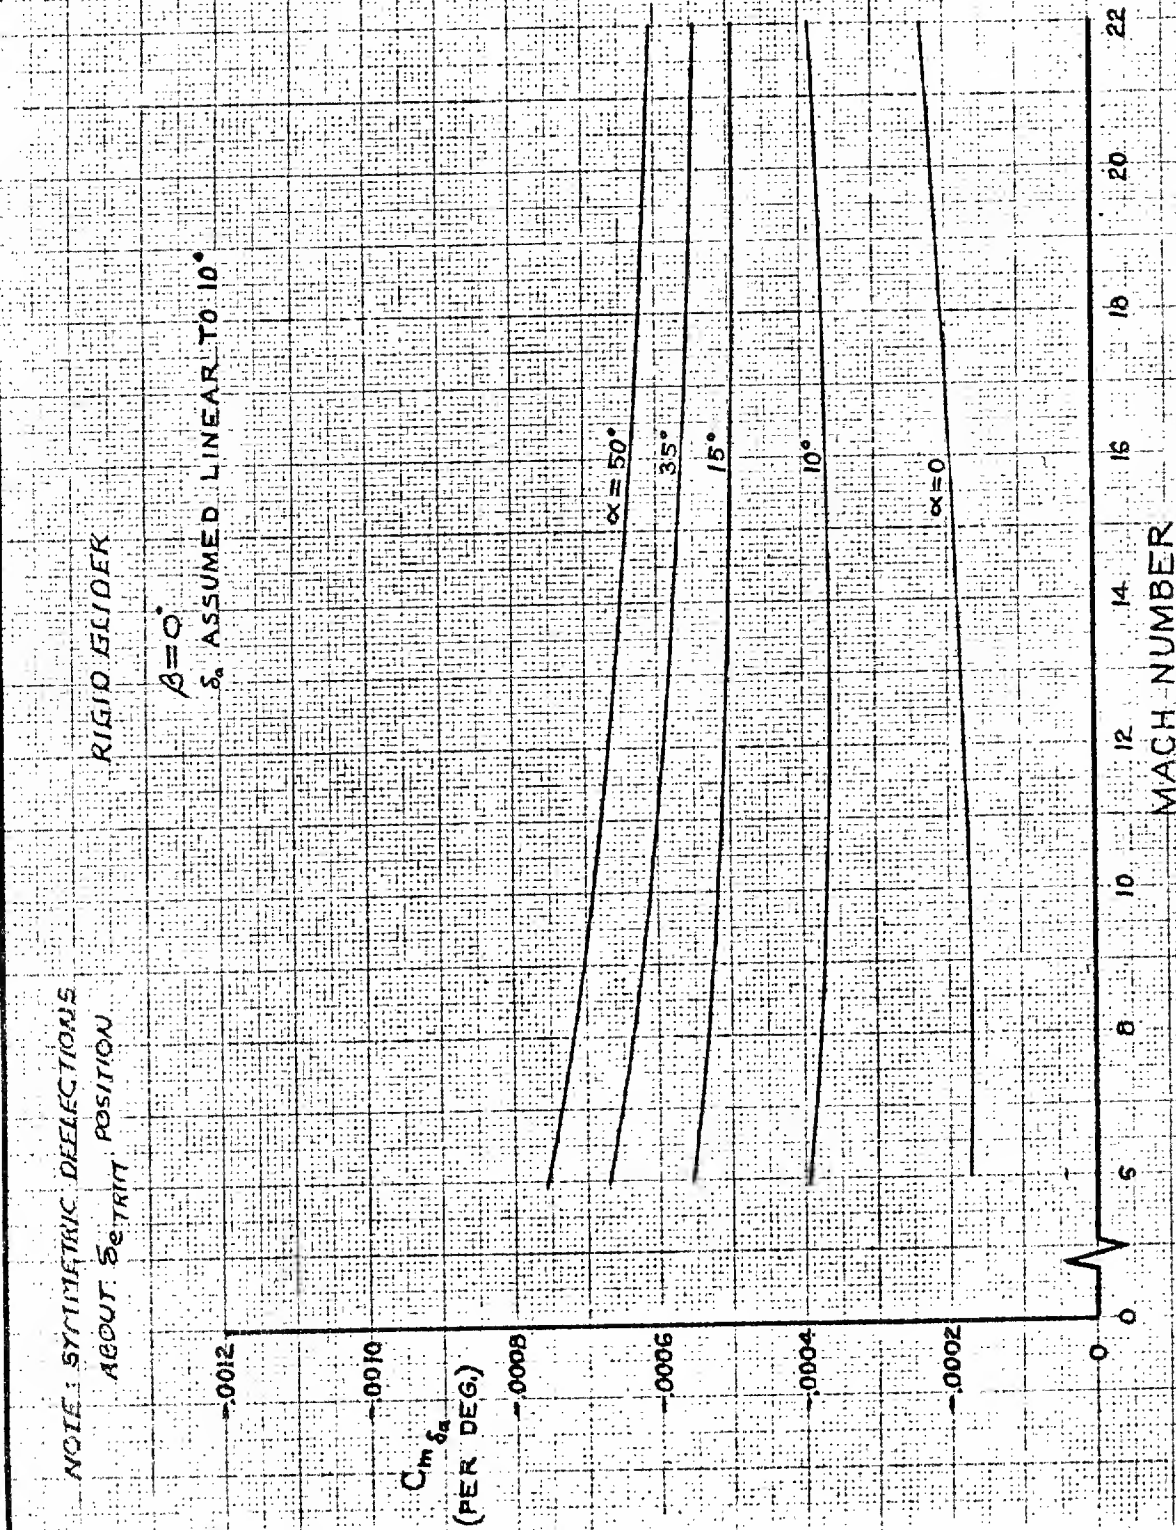


FIG. 6.6A

CALC	WJK	12-12-61	REVISED	DATE
CHECK			12-12-61	
APR				
APR				

AILERON/PITCH COUPLING
PITCHING MOMENT
HYPERSONIC

THE BOEING COMPANY

844-
2050 D
DR-80065
PAGE
6.72

CONFIDENTIAL

146

CONFIDENTIAL

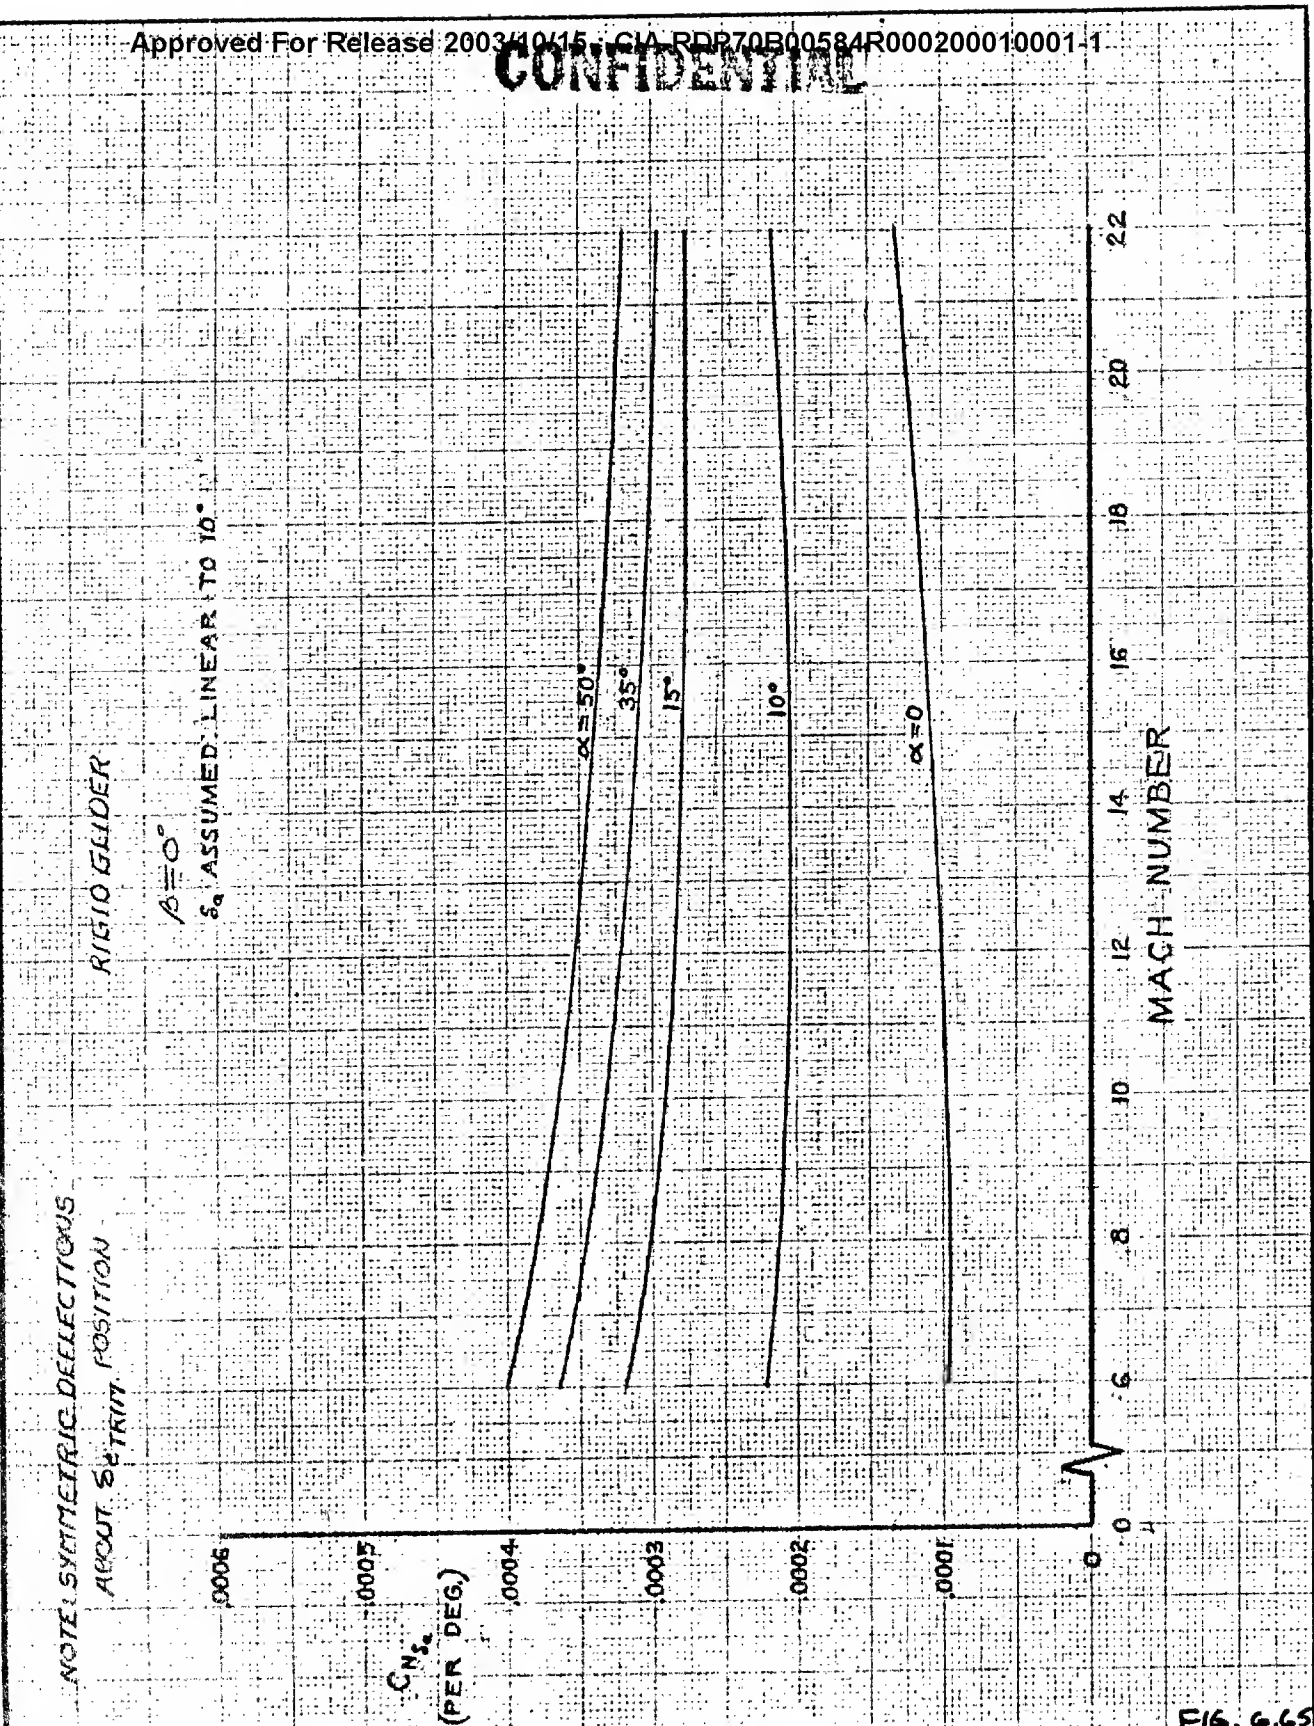


FIG. 6.65

CALC	LDK	12-12-61	REVISED	DATE	AILERON/PITCH COUPLING NORMAL FORCE HYPERSONIC	844-2050-D
CHECK			12-22-61			DR-80065
APR						PAGE
APR						6.73
THE BOEING COMPANY						

CONFIDENTIAL

147

CONFIDENTIAL

6.1.6 ROTARY DERIVATIVES

Pitch damping derivative $C_{m\dot{\alpha}}$, shown in Figure 6.66, was obtained from NASA reports of similar configurations. These data were also compared with linear theory which showed reasonable agreement at supersonic speeds but was nearly double the empirical value at subsonic speeds. Data from Langely Research Center Free Flight Wind Tunnel showing the effects of angle of attack and oscillation frequency on $C_{m\dot{\alpha}}$ and $C_{m\ddot{\alpha}}$ are shown in Figure 6.67. Additional theoretical and experimental work is planned to further define these derivatives.

12-20-1

U3 4070 7000 REV. 5/61

CONFIDENTIAL

BOEING

NO. D2-80065

PAGE 74

25100

CONFIDENTIAL

DYNA-SOAR
MODEL 844-2050C

$$C_{mq} = \frac{\partial C_m}{\partial \left(\frac{\theta \bar{c}}{2V} \right)}$$

$$\bar{c} = 1.44 \text{ ft}$$

$$\bar{c} = 24.6 \text{ in.}$$

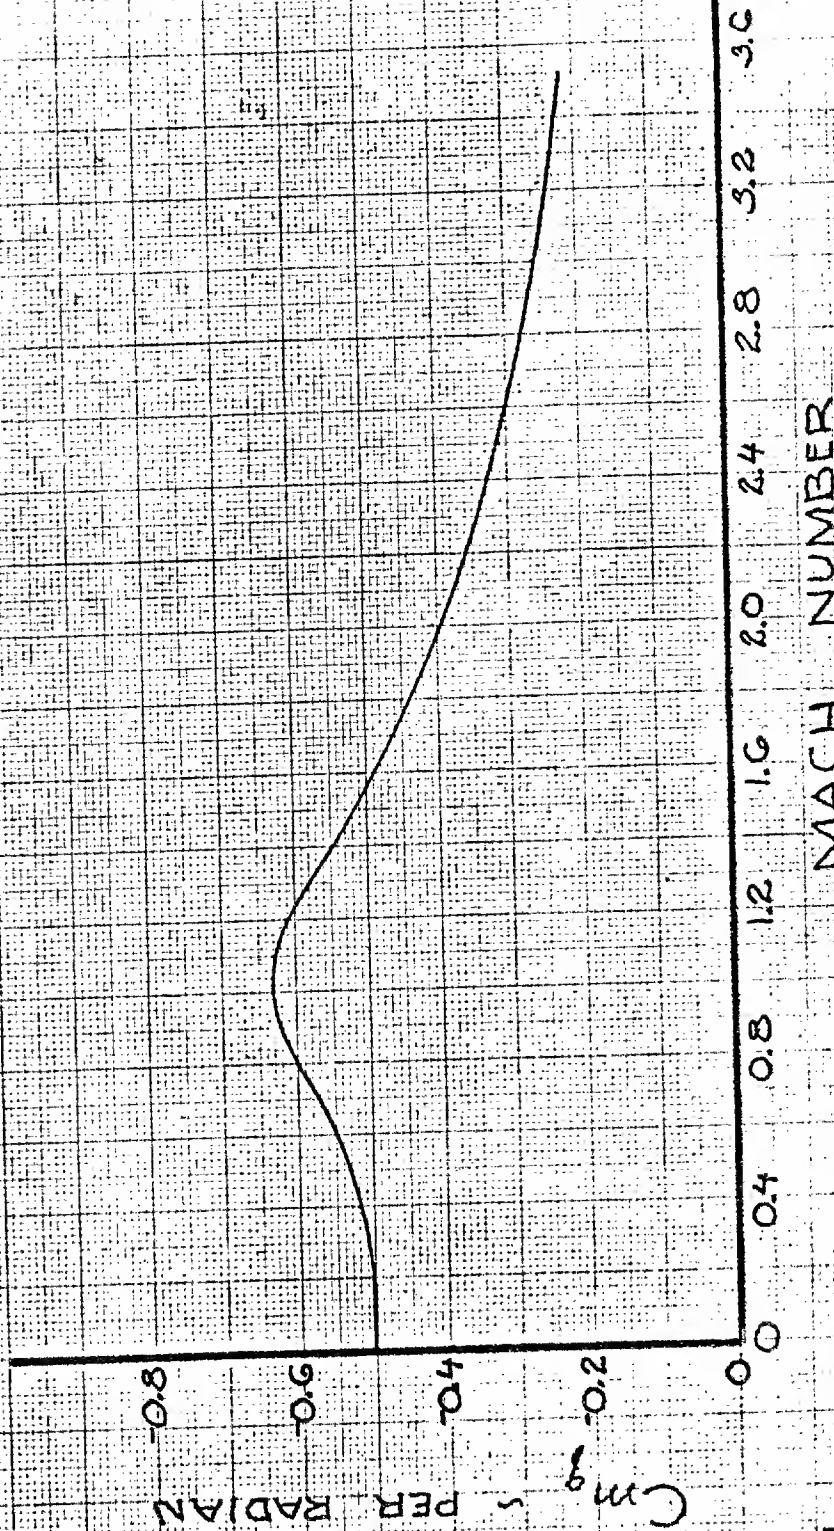


FIG. 6.66

CALC	SARATA	3-30-61	REVISED	DATE
CHECK			12-20-61	
APR				
APR				
TRACED				

PITCHING MOMENT DUE
TO PITCHING VELOCITY

THE BOEING COMPANY

844-20500
12-80065
PAGE
6.75

CONFIDENTIAL

CONFIDENTIAL

$$M = 0.06$$

LANGLEY DATA
2002 CONFIG.
C.G. = 67.5% CR

$$\frac{Wb}{2V} = 0.10$$

$$\frac{Wb}{2V} = 0.15$$

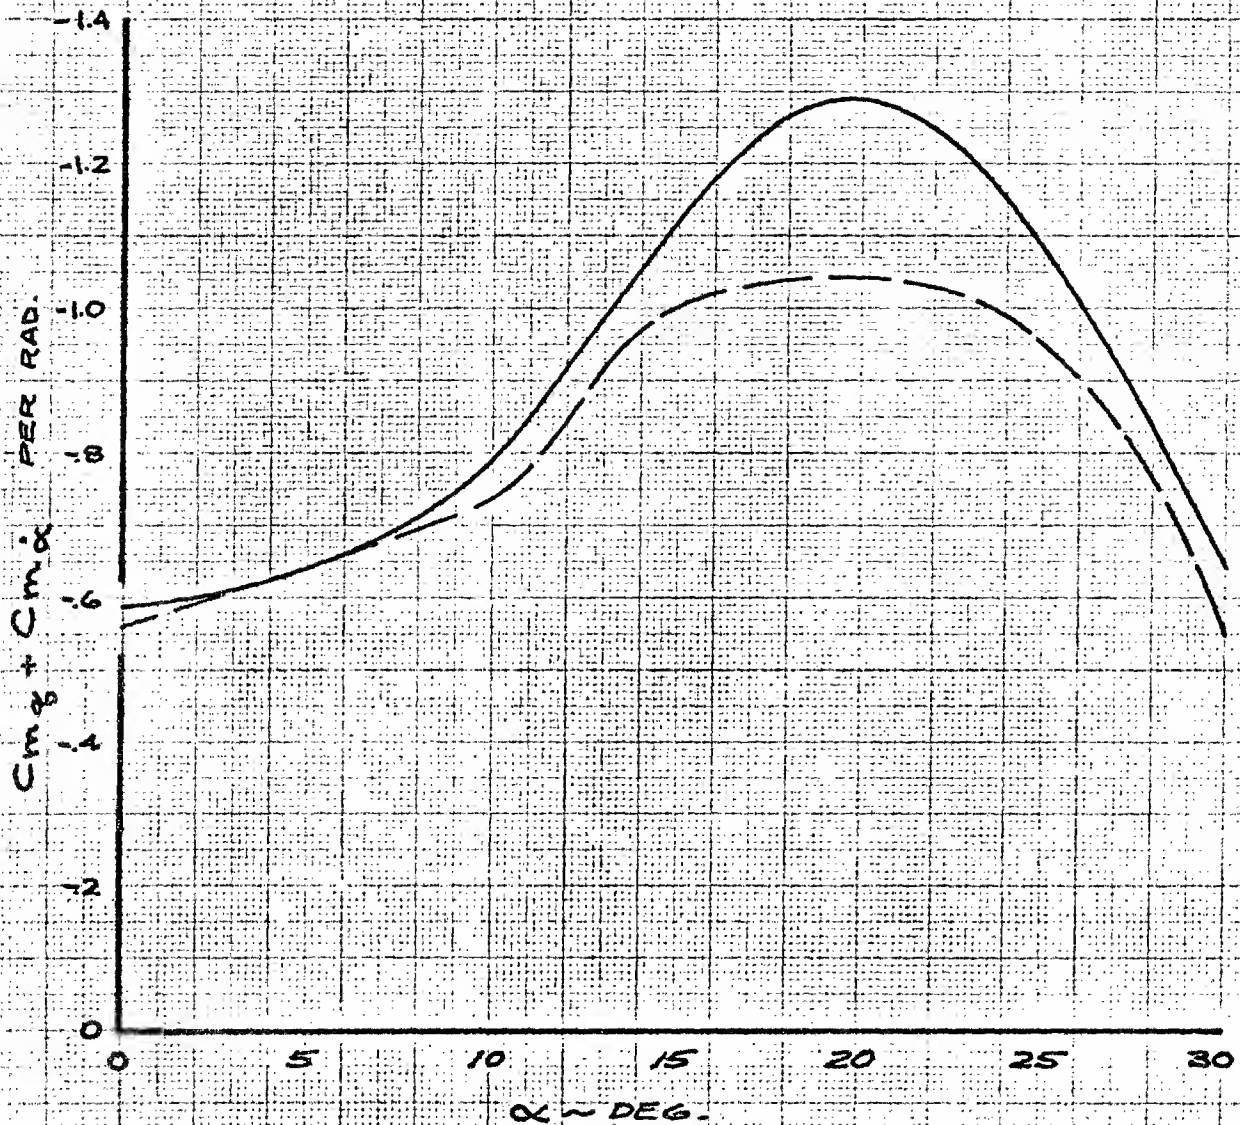


FIG. 6.67

CALC	SAHATA	3-5061	REVISED	DATE	PITCHING MOMENT DUE TO PITCHING VELOCITY LOW SPEED	844-
CHECK			12-5-1			2050D
APR						D2-80065
APR						PAGE
DRN	R. RICE	12-184			THE BOEING COMPANY	6.76

CONFIDENTIAL

CONFIDENTIAL**6.1.7 ELEVON HINGE MOMENT CHARACTERISTICS**

The elevon hinge moment coefficients are for the current glider configuration, 844-2050D.

The data used for the curves presented in Figures 6.68 through 6.88 consists of wind tunnel data obtained at the Boeing Transonic and Supersonic Tunnels, Tests BTWT 685 and BSWT 113 and then modified to the 844-2050D rigid glider.

The curves for the hinge moment derivatives C_{H_α} , $C_{H_{\delta_e}}$ and C_{H_β} , as shown in Figures 6.68 through 6.70, and the curve for the coefficient C_{H_0} , as shown in Figure 6.71, summarize the change in the linearized coefficient data with a variation in Mach number. All data are based on an elevon 2 Ma value equal to 1222 in-ft. sq. and an area equal to 22.9 ft. sq. per elevon.

Detailed elevon hinge moment coefficients and their variation with elevon deflection (δ_e) and glider angle of attack (α) are shown in Figures 6.72 through 6.80. These data are not linear for the transonic speed range of Mach number equal to .90 through 1.1.

Figures 6.81 through 6.88 show the relationship between elevon trim position and elevon float position and may be used to determine the elevon actuator load reversal points. The elevon required to trim information is a repeat of data in section 6.1, Longitudinal Stability and Control.

12-20-1

U3-4071-1000 (was SAC 1546-L-R3)

CONFIDENTIAL**BOEING**

NO. 02-80065

PAGE 6.77

CONFIDENTIAL

DYNA-SOAR MODEL 844-2050D

CH_A IS NEGATIVE FOR RIGHT ELEVON
" " IS POSITIVE FOR LEFT ELEVON

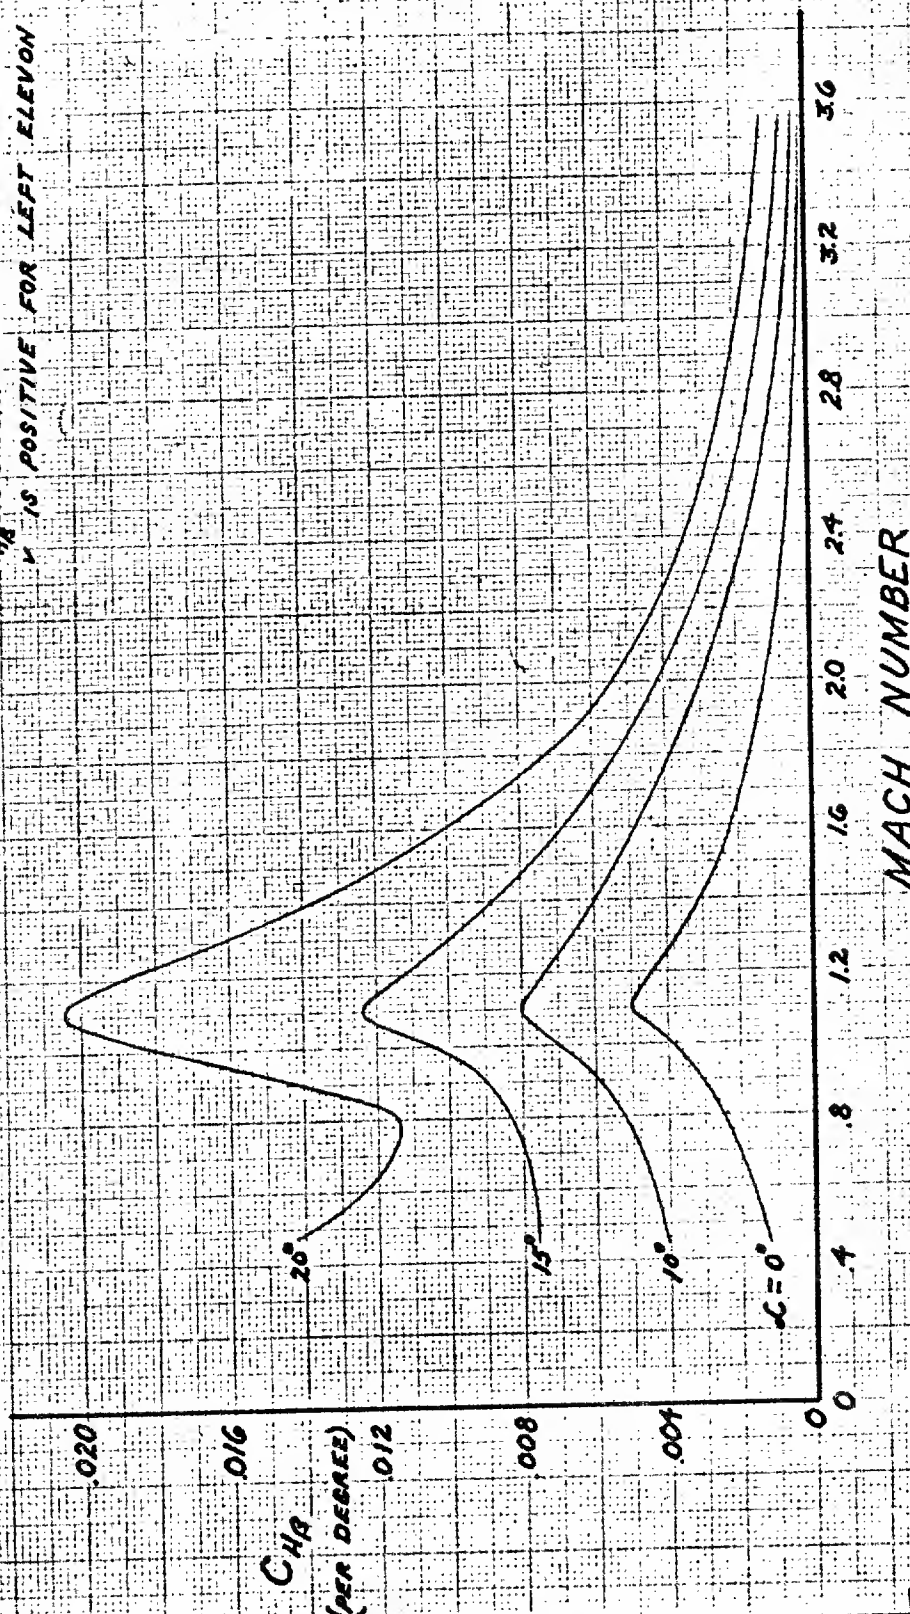


FIG. 6.68

CALC	12-7-61	REVISED	DATE
CHECK		12-20-61	
APR			
APR			

EFFECT OF MACH NUMBER ON
ELEVON HINGE MOMENT DERIVATIVE
CH_A

BOEING AIRPLANE COMPANY

844-2050D

02-80065

PAGE
6.78

CONFIDENTIAL

CONFIDENTIAL

DYNA-SOAR MODEL 844-2050D

$\alpha = 0^\circ$
 $\beta = 0^\circ$

ELEVON $2Mq = 1222 \text{ IN}^2 \text{ FT}^2$
ELEVON AREA = $22.9 \text{ FT}^2 / \text{SIDE}$

$C_{Hse} .03$
(PER DEGREE)

MACH NUMBER

FIG. 6.69

CALC	W. J. G.	12-7-61	REVISED	DATE
CHECK			12-20-61	
APR				
APR				

EFFECT OF MACH NUMBER ON
ELEVON HINGE MOMENT DERIVATIVE

BOEING AIRPLANE COMPANY

844-2050D

D2-80065

PAGE
6.79

CONFIDENTIAL

CONFIDENTIAL

DYNA-SOAR MODEL 844-2050 D

$\delta_e = 0^\circ$, $\beta = 0^\circ$

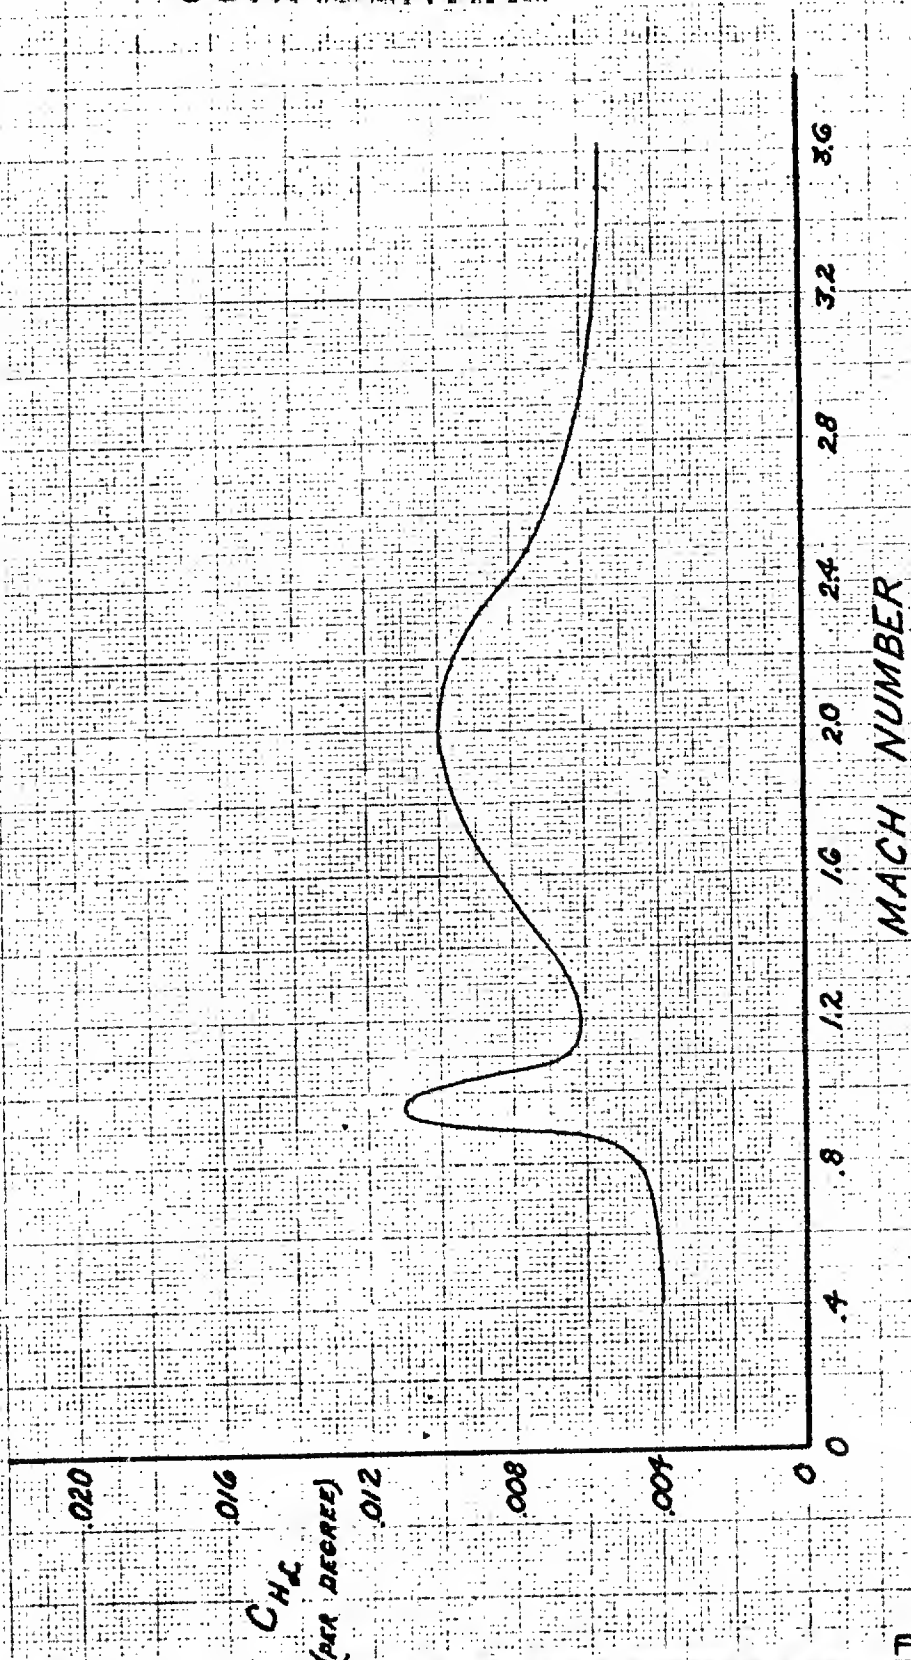


FIG. 6.70

CALC	<i>Handwritten</i>	11-7-61	REVISED	DATE
CHECK			12-20-61	
APR				
APR				

EFFECT OF MACH NUMBER ON
ELEVON HINGE MOMENT DERIVATIVE

CH_L

THE BOEING COMPANY

844-2050 D
D2-80065
PAGE
6.80

CONFIDENTIAL

CONFIDENTIAL

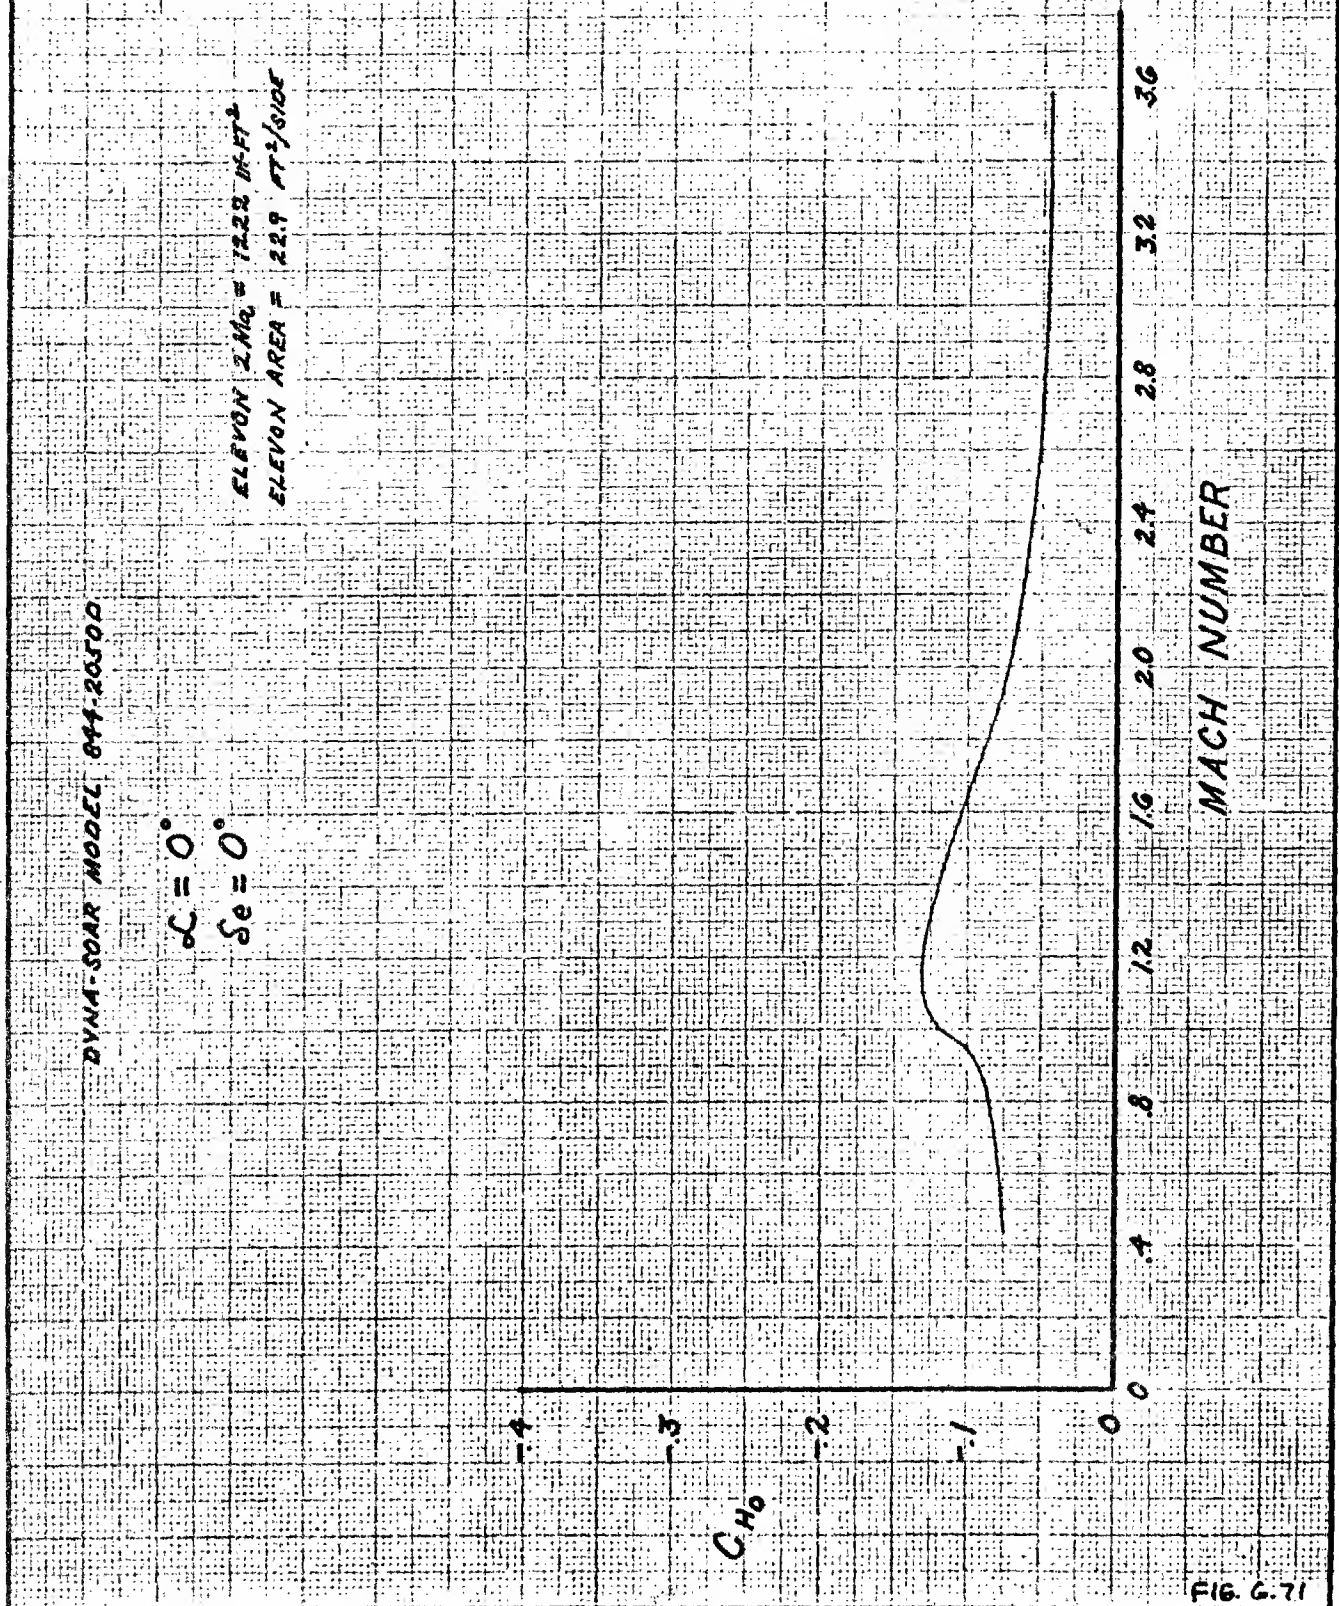


FIG. G.71

CALC	<i>Hand</i>	<i>48.</i>	12-7-61	REVISED	DATE	EFFECT OF MACH NUMBER ON ELEVON HINGE MOMENT COEFFICIENT $L = 0^\circ$, $S_e = 0^\circ$ BOEING AIRPLANE COMPANY	844-2050D
CHECK				12-20-61			D2-80065
APR							PAGE
APR							6.81

CONFIDENTIAL

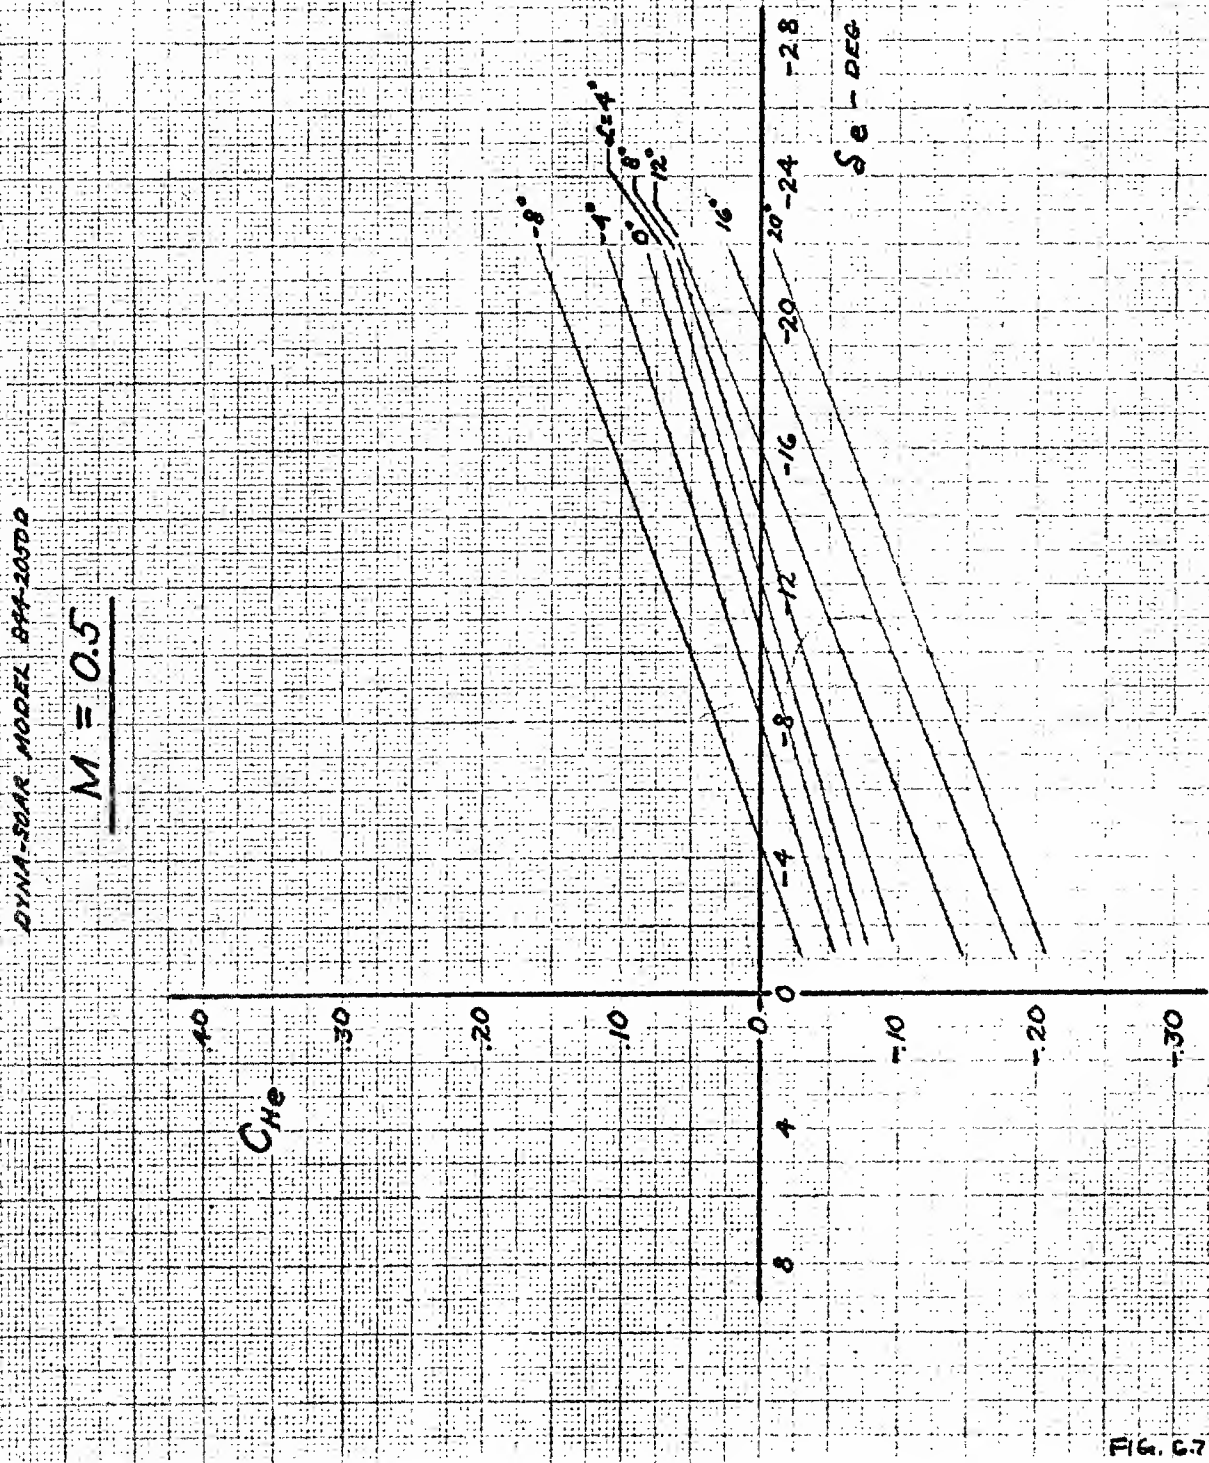


FIG. C.72

CALC	<i>Hand R.S.</i>	11-6-61	REVISED	DATE	EFFECT OF ELEVON DEFLECTION ON HINGE MOMENT $M = 0.50$ THE BOEING COMPANY	844-2050D
CHECK			12-6-61			D2-80065
APR						PAGE
APR						C.82

U3 4013 8000

ALBANY 1961

50629

CONFIDENTIAL

DYNA-SMAR MODEL 844-20500

$M = 0.8$

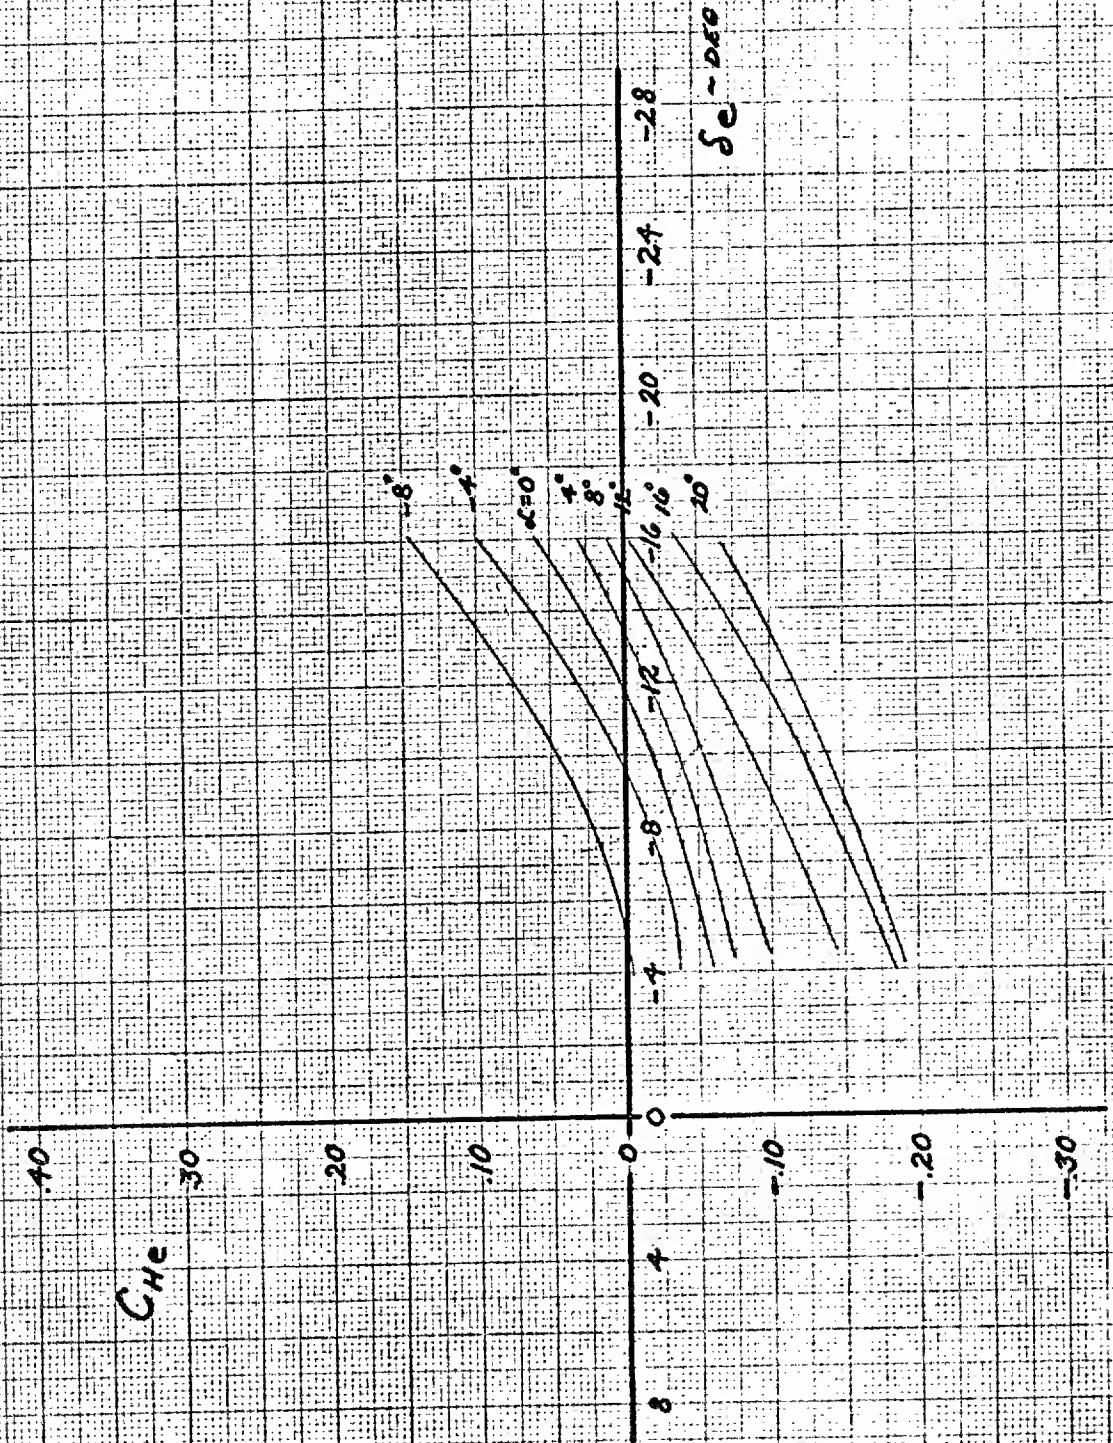


FIG. 6.73

CALC	For 0.8	11.6.61	REVISED	DATE
CHECK			12-22-1	
APR				
APR				

EFFECT OF ELEVON DEFLECTION
ON HINGE MOMENT
 $M = 0.80$

THE BOEING COMPANY

844-20500

02-80065

PAGE
6.83

CONFIDENTIAL

W, B, E, V, 2050

157

CONFIDENTIAL

DYNA-SOAR MODEL 844-20500

$M = 0.90$



FIG. 6.14

CALC	SAWYER	12-2-1	REVISED	DATE
CHECK				
APR				
APR				

EFFECT OF ELEVON DEFLECTION
ON HINGE MOMENT
 $M = 0.90$

THE BOEING COMPANY

844-20500

02-80065

PAGE
6.84

CONFIDENTIAL

DYNA-SOAR MODEL 844-2050D

M = 0.95

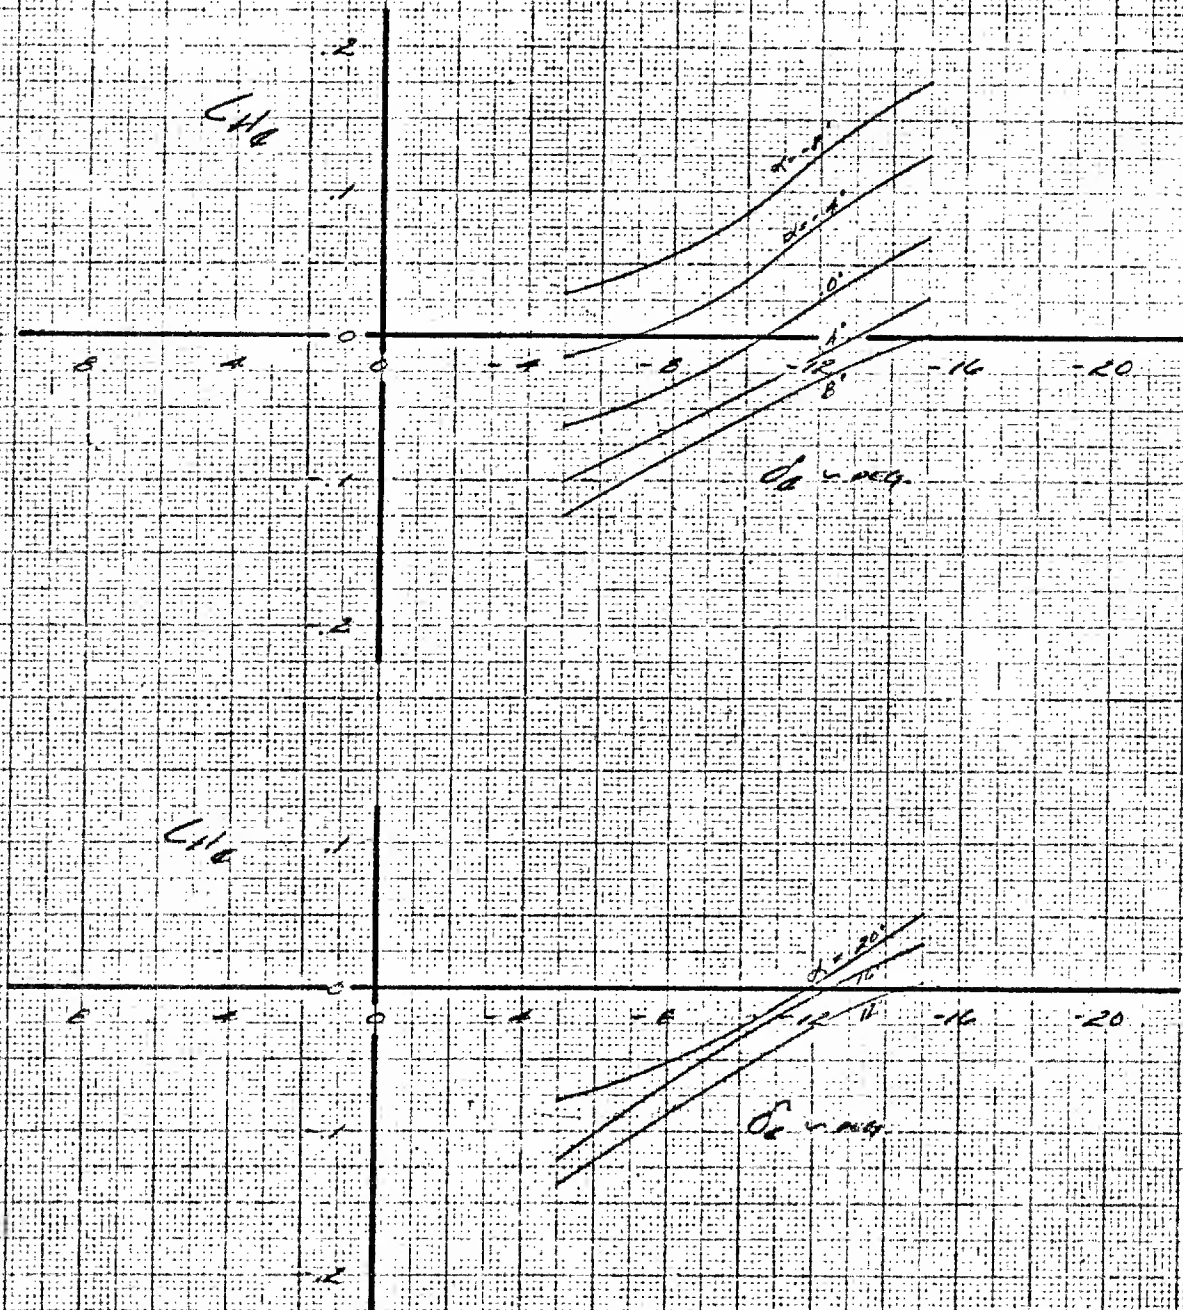


FIG. 6.75

CALC	SAKATA	N. 2.1	REVISED	DATE
CHECK			12-20-1	
APR				
APR				

EFFECT OF ELEVON DEFLECTION
ON HINGE MOMENT
M = 0.95

844-2050D
02-80065
PAGE
6.85

THE BOEING COMPANY

CONFIDENTIAL

CONFIDENTIAL

DYNA-SOAR MODEL 644-20500

$M = 1.00$

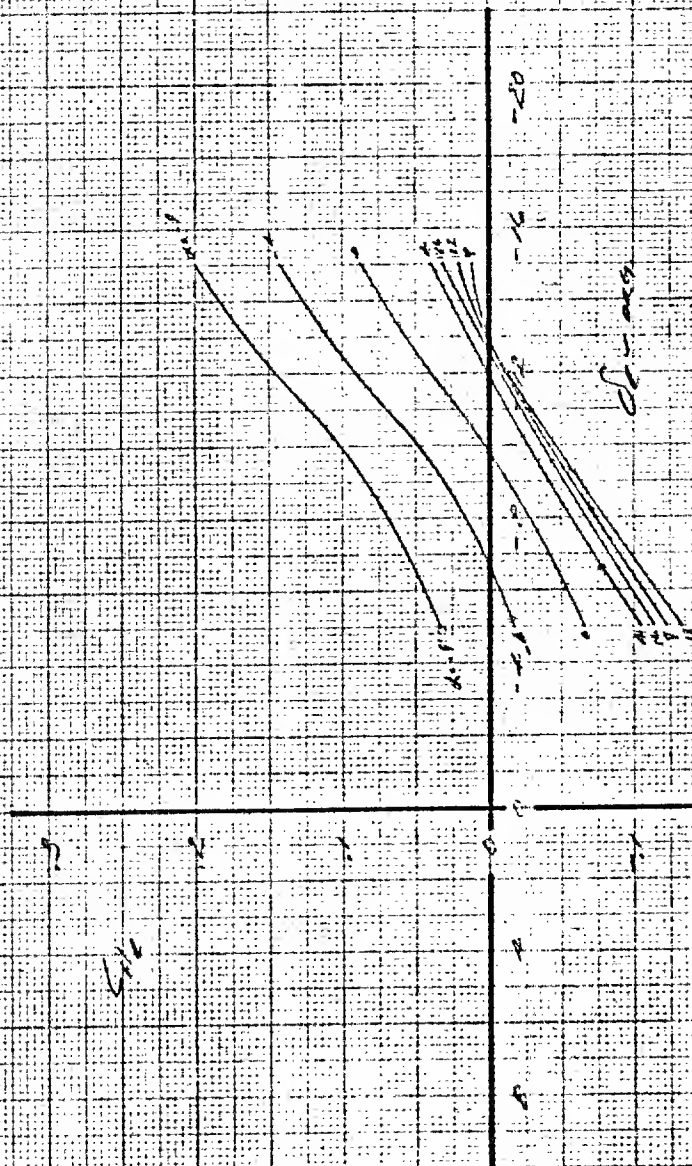


FIG. G.76

CALC	JAN 64	4.7.1	REVISED	DATE
CHECK			12-2-61	
APR				
APR				

EFFECT OF ELEVON DEFLECTION
ON HINGE MOMENT
 $M = 1.00$

THE BOEING COMPANY

844-20500

02-80065

PAGE
G. 16

CONFIDENTIAL

CONFIDENTIAL

DYNA-SOAR MODEL 844-20500

$M = 1.1$

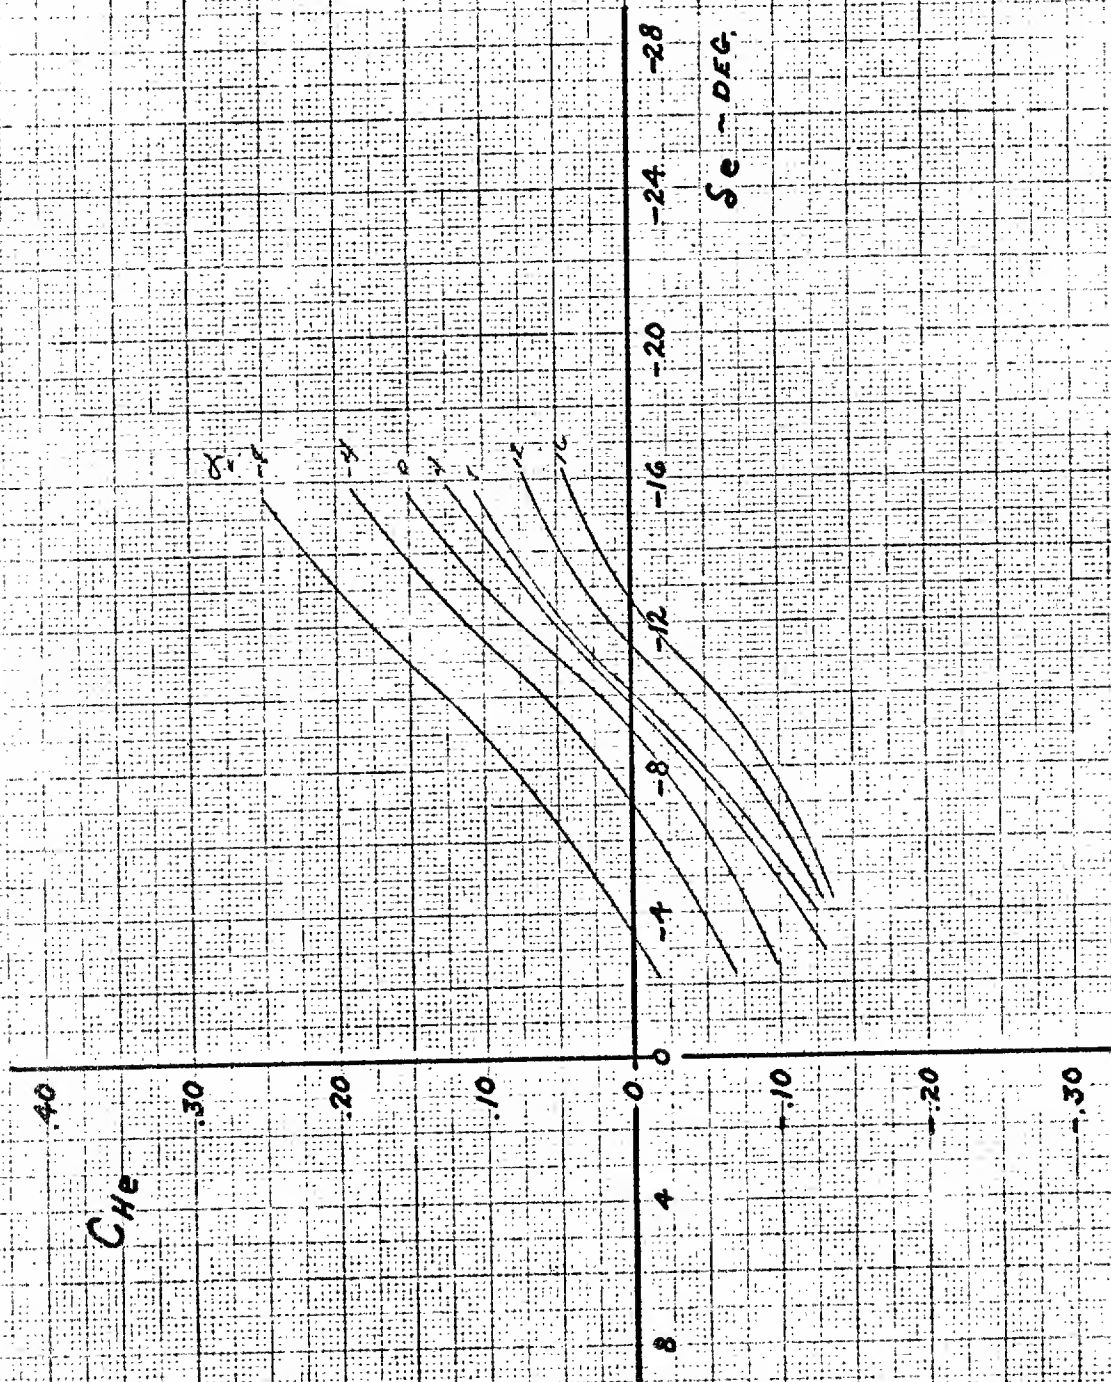


FIG. 6.77

CALC	<i>Hand A.C.</i>	11-3-61	REVISED	DATE
CHECK			12-20-61	
APR				
APR				

EFFECT OF ELEVON DEFLECTION
ON HINGE MOMENT
 $M = 1.10$

THE BOEING COMPANY

844-20500
02-80065
PAGE
6.87

CONFIDENTIAL

CONFIDENTIAL

DYNA-SOAR MODEL 844-2050D

$M = 1.4$

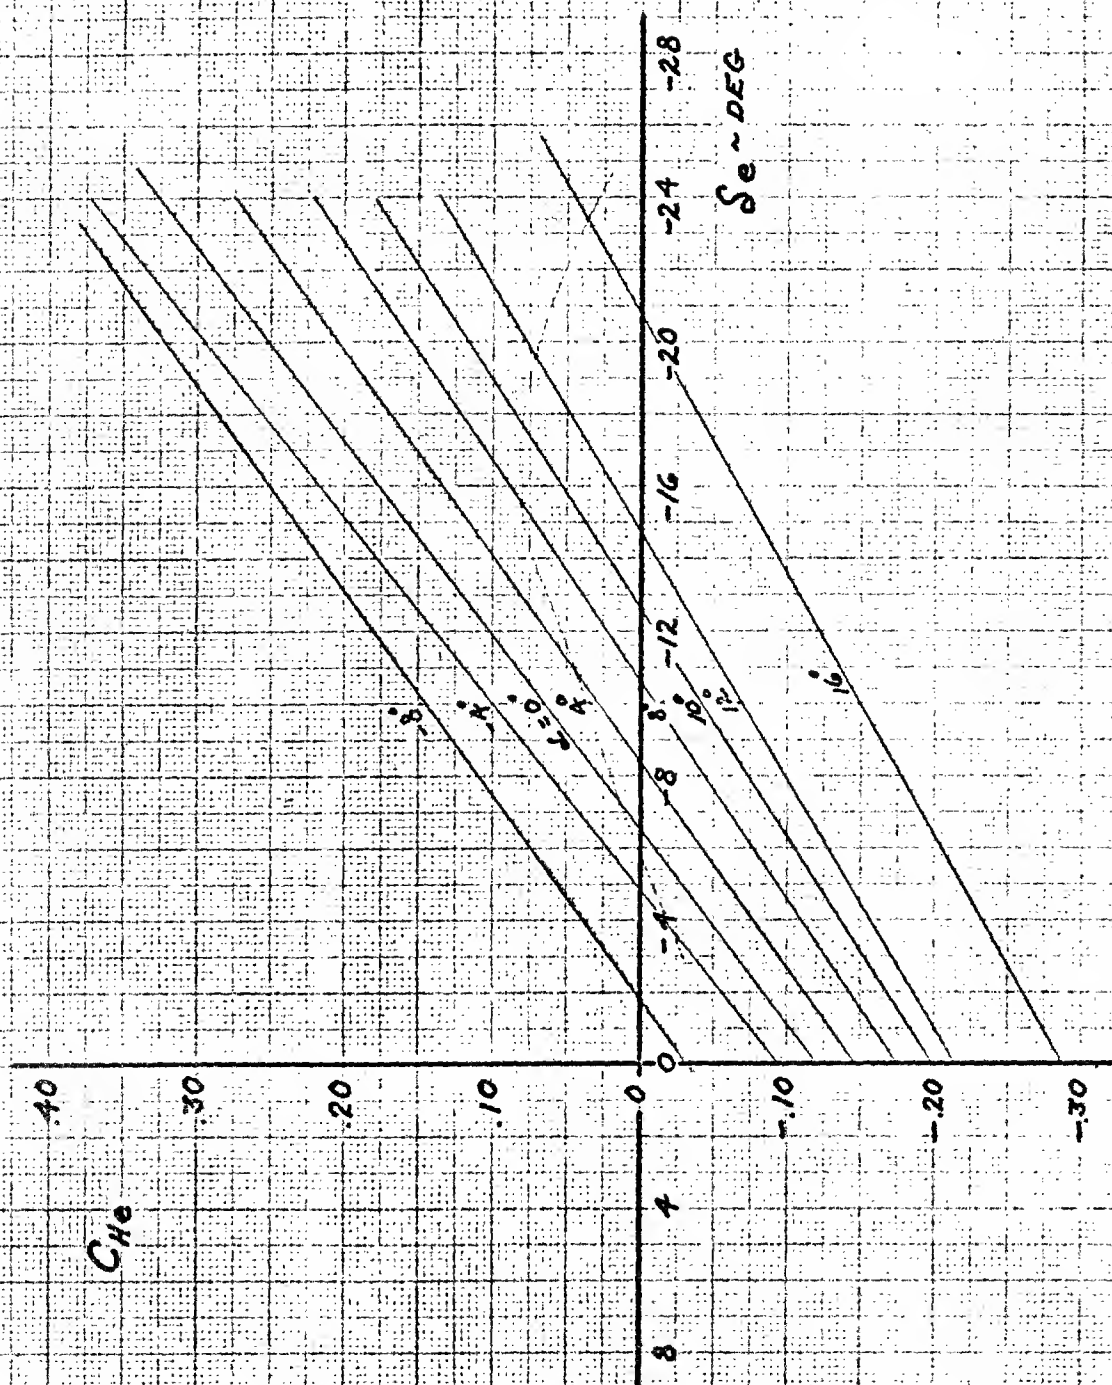


FIG. 6.7B

CALC	<i>Hand</i>	11-3-61	REVISED	DATE	EFFECT OF ELEVON DEFLECTION ON HINGE MOMENT $M = 1.40$	844-2050D
CHECK			12-25-61			D2-80065
APR						PAGE
APR						6.88
THE BOEING COMPANY						

CONFIDENTIAL

DYNASOAR MODEL 844-20500

$M = 2.0$

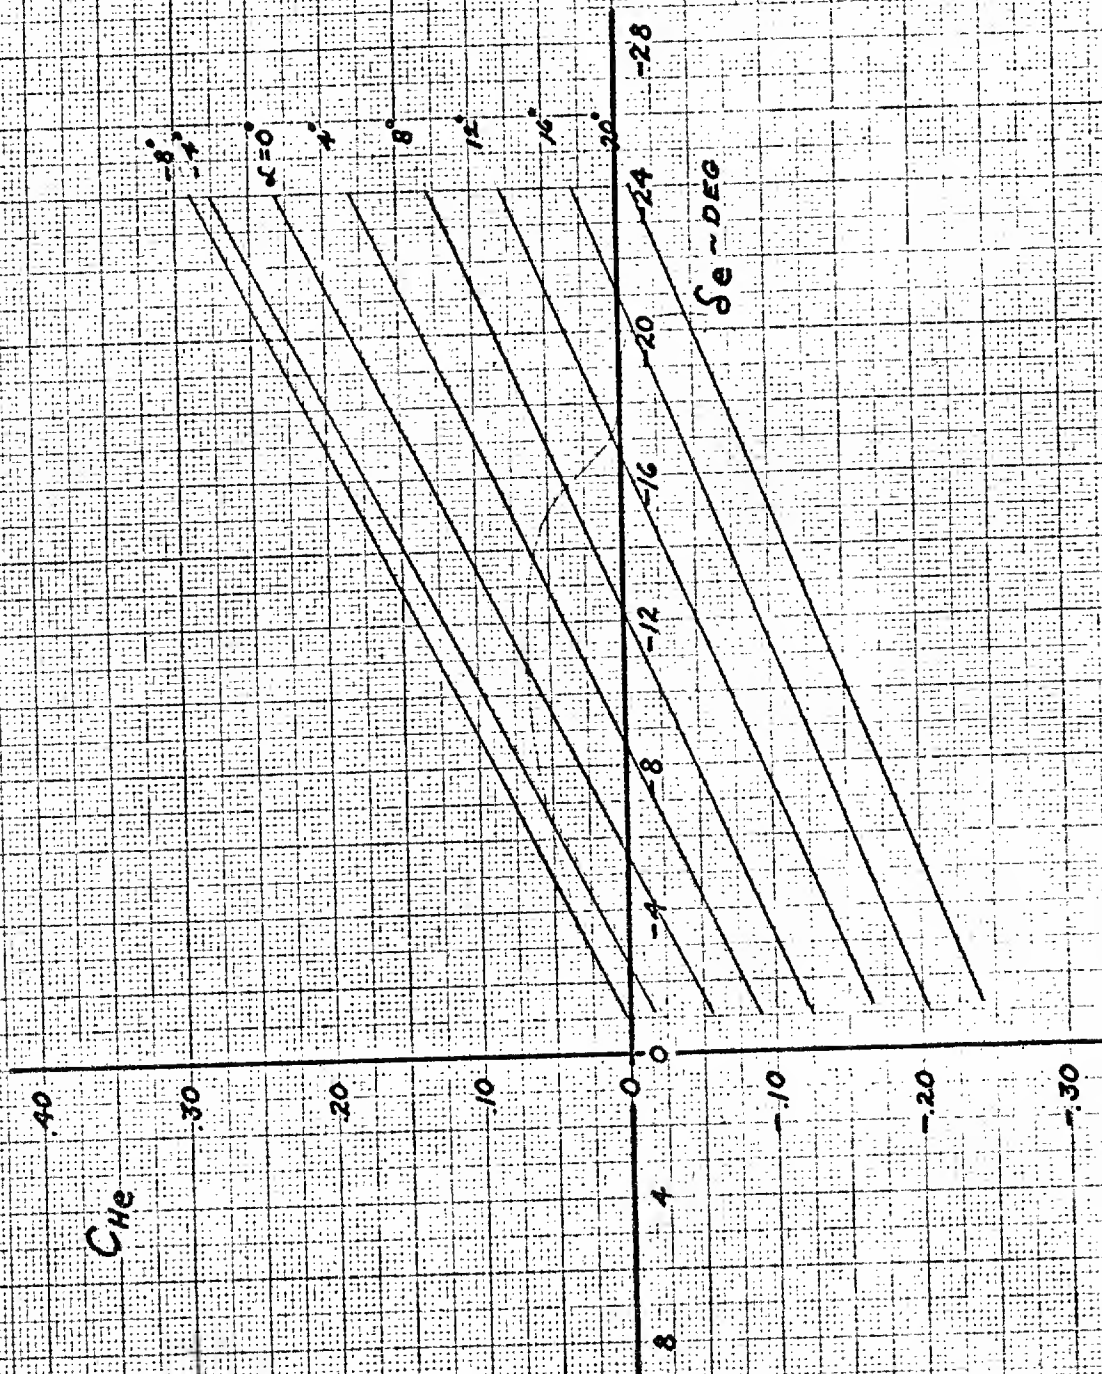


FIG. 6.79

CALC	<i>Hand</i>	11-6-61	REVISED	DATE
CHECK			12-20-61	
APR				
APR				

EFFECT OF ELEVON DEFLECTION
ON HINGE MOMENT
 $M = 2.00$

THE BOEING COMPANY

844-20500

02-80065

PAGE
6.19

CONFIDENTIAL

DYNA-SOAR MODEL 844-2050D

M = 3.5

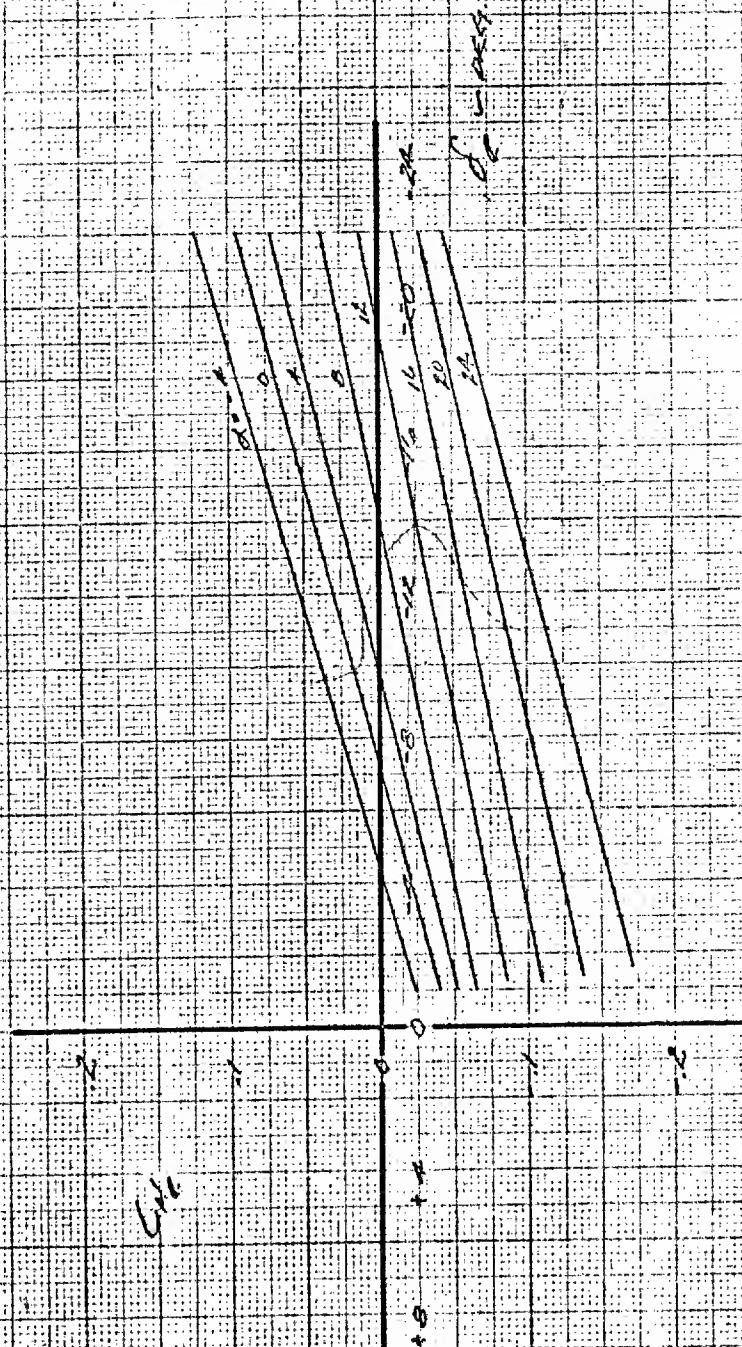


FIG. 6.80

CALC	Designed	12.1	REVISED	DATE
CHECK			12.2	1
APR				
APR				

EFFECT OF ELEVON DEFLECTION
ON HINGE MOMENT
M = 3.50

THE BOEING COMPANY

844-2050D
D2-80065
PAGE
6.90

CONFIDENTIAL
DYM-SHC MODEL 67-2350D

$$M = 0.50$$

C.G. AT .44 M.R.C.

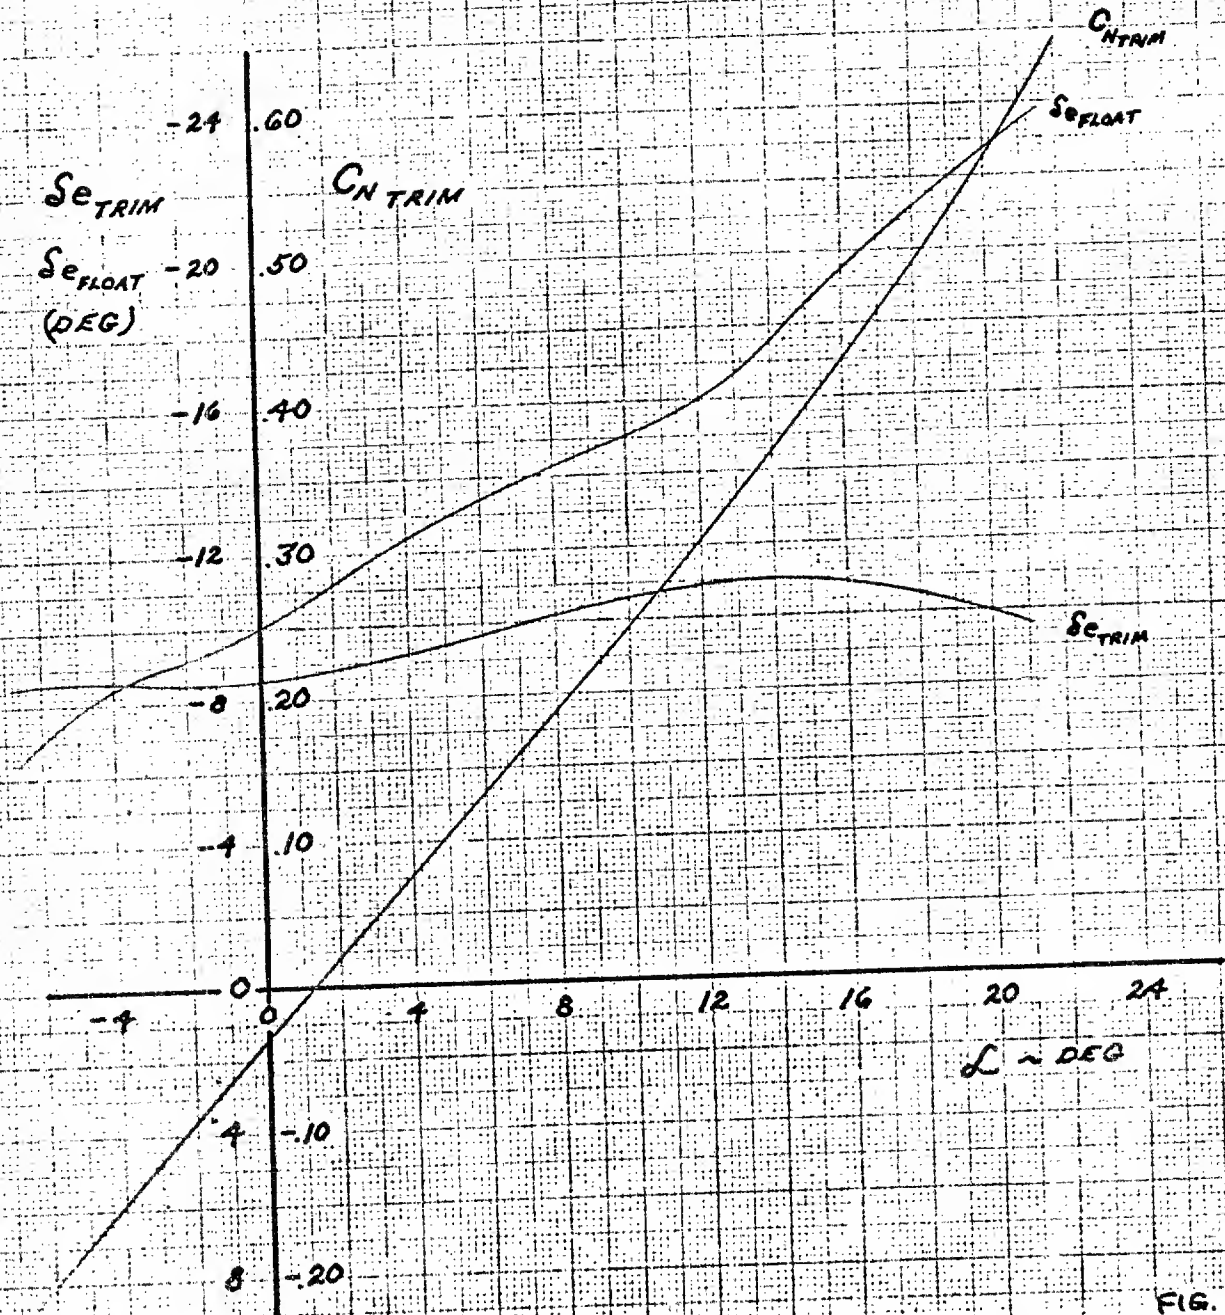


FIG. 6.81

CALC	<i>Handwritten initials</i>	11-13-61	REVISED	DATE	ELEVON FLOAT & TRIM COMPARISON GLIDER ALONE $M = 0.50$ THE BOEING COMPANY	844-2050D
CHECK			12-20-61			02-80065
APR						PAGE
APR						6.91

CONFIDENTIAL

DRAM-504K MODEL 844-2050D

$M = 0.80$

$C_{LH} = 14.4 \text{ MCL}$

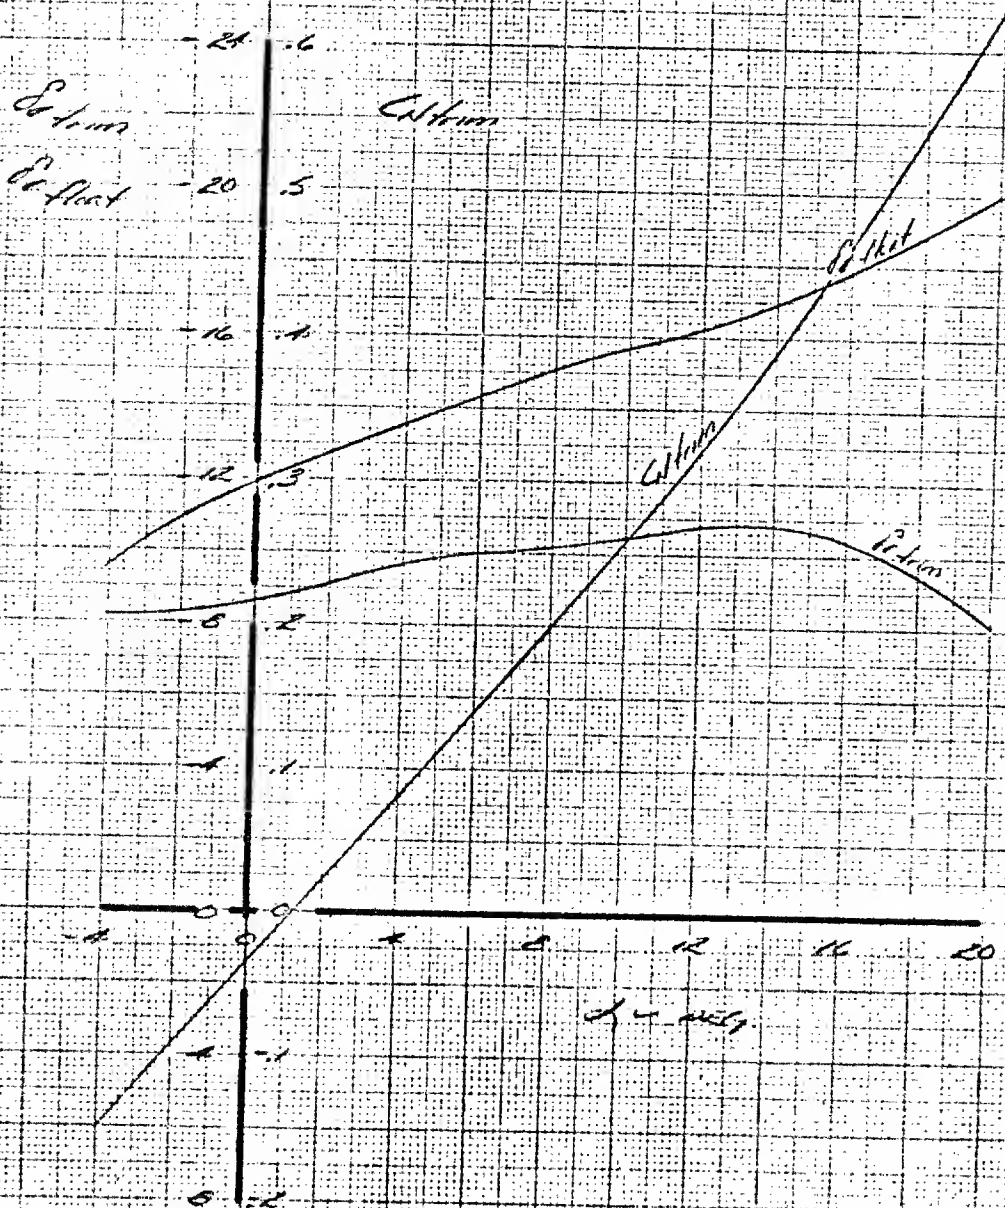


FIG. G.82

CALC	SWANSON	11-12-1	REVISED	DATE
CHECK			12-3-1	
APR				
APR				

ELEVON FLOAT & TRIM COMPARISON
GLIDER ALONE
 $M = 0.80$

844-2050D

02-80065

THE BOEING COMPANY

PAGE 6.92

CONFIDENTIAL

DATA-SKIP MODEL 844-2050D

$$M = 0.95$$

C.G. AT .44 m.q.c.

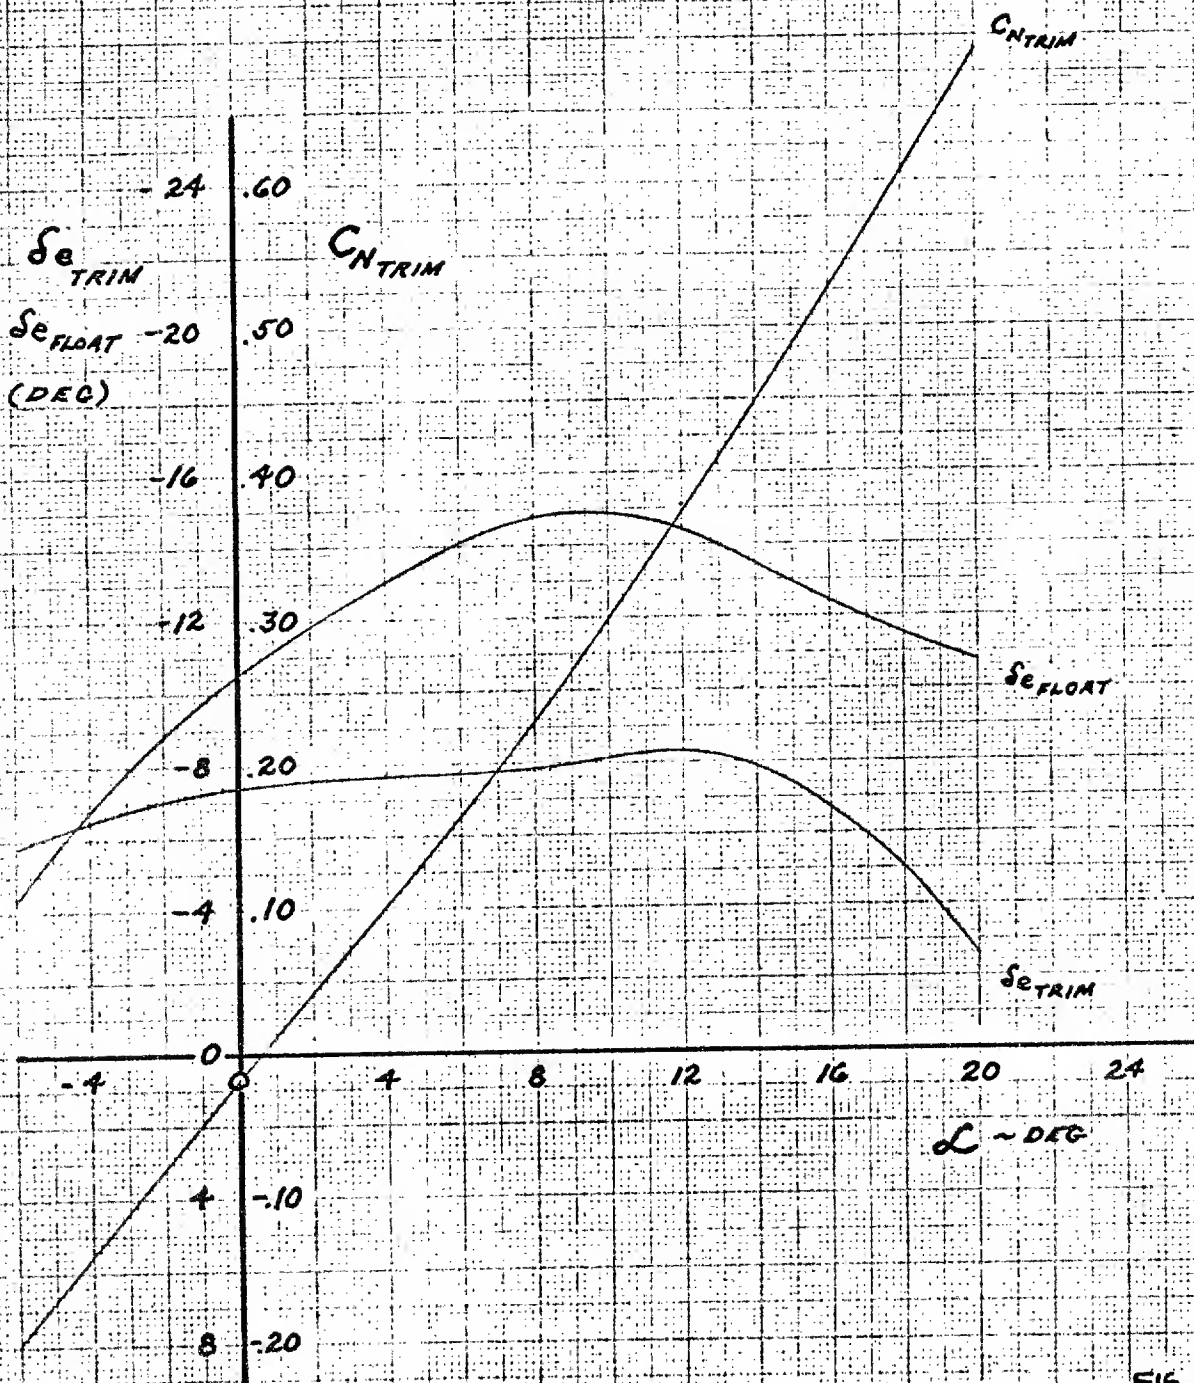


FIG. 6.83

CALC	<i>Hand R.P.</i>	11-11-61	REVISED	DATE	ELEVON FLOAT & TRIM COMPARISON GLIDER ALONE $M = 0.95$ THE BOEING COMPANY	844-2050D
CHECK			12-20-61			02-80065
APR						PAGE
APR						6.93

CONFIDENTIAL

DATA-SOAR MODEL 844-20500

$M = 1.00$

$C.G. = 44 \text{ in}$

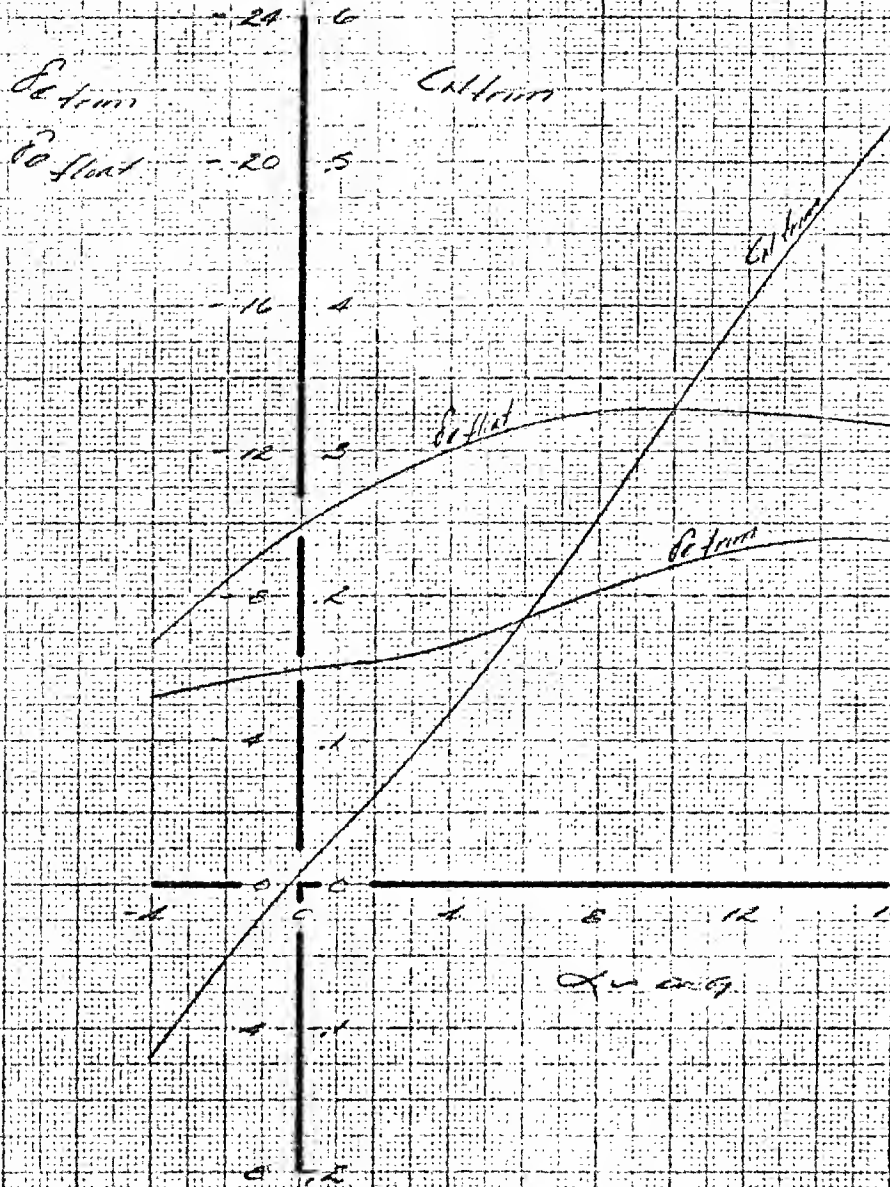


FIG. 6.84

CALC	844-20500	N. 15-1	REVISED	DATE	ELEVON FLOAT & TRIM COMPARISON GLIDER ALONE $M = 1.00$ THE BOEING COMPANY	844-20500
CHECK			12-50-1			02-80065
APR						PAGE
APR						6.94

U3 4013 R000

CONFIDENTIAL

K-E ALBANY 1981 TRACING PAPER

60629

CONFIDENTIAL

RUN-5000 844-20500

$M = 1.10$

$C.G. = 14.00$

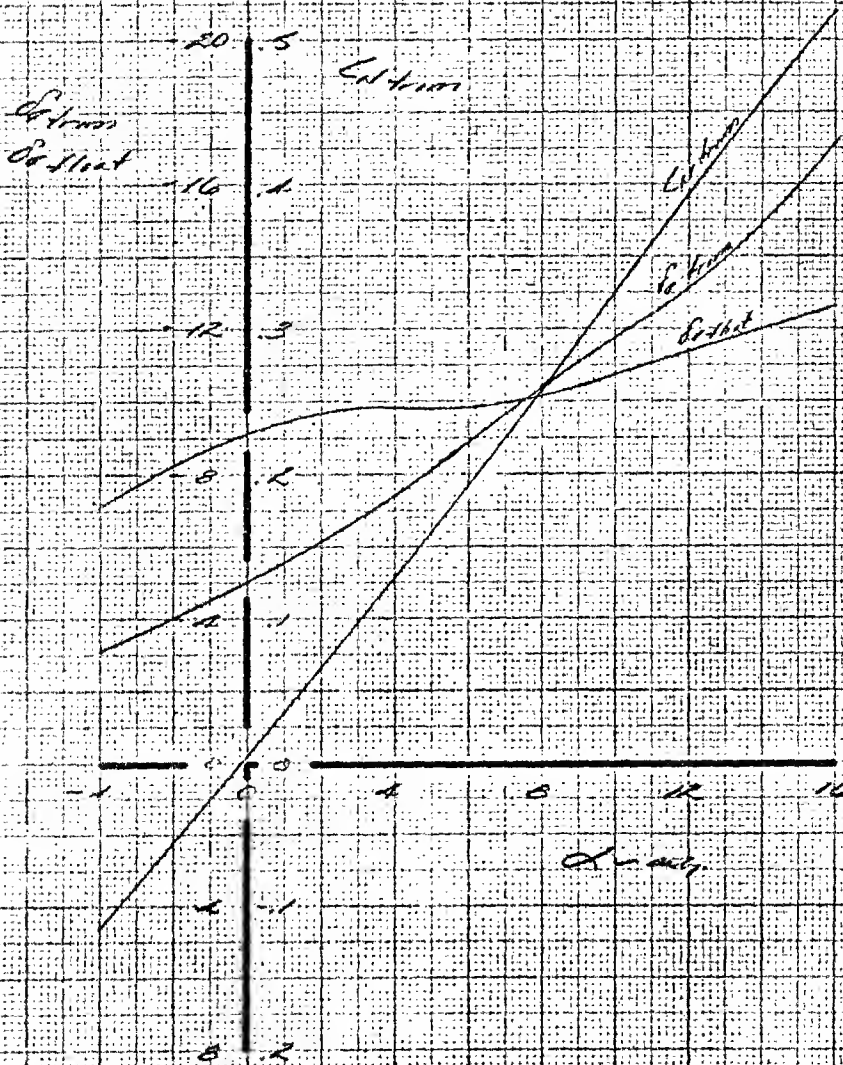


FIG. 6.85

CALC	Summary	11.13.1	REVISED	DATE
CHECK			12-20-1	
APR				
APR				

ELEVON FLOAT & TRIM COMPARISON
GLIDER ALONE
 $M = 1.10$

THE BOEING COMPANY

844-20500
OR-80065
PAGE
695

CONFIDENTIAL
DYNAL-SOAR MODEL 677-20500

1.4

CG. = 14.0366

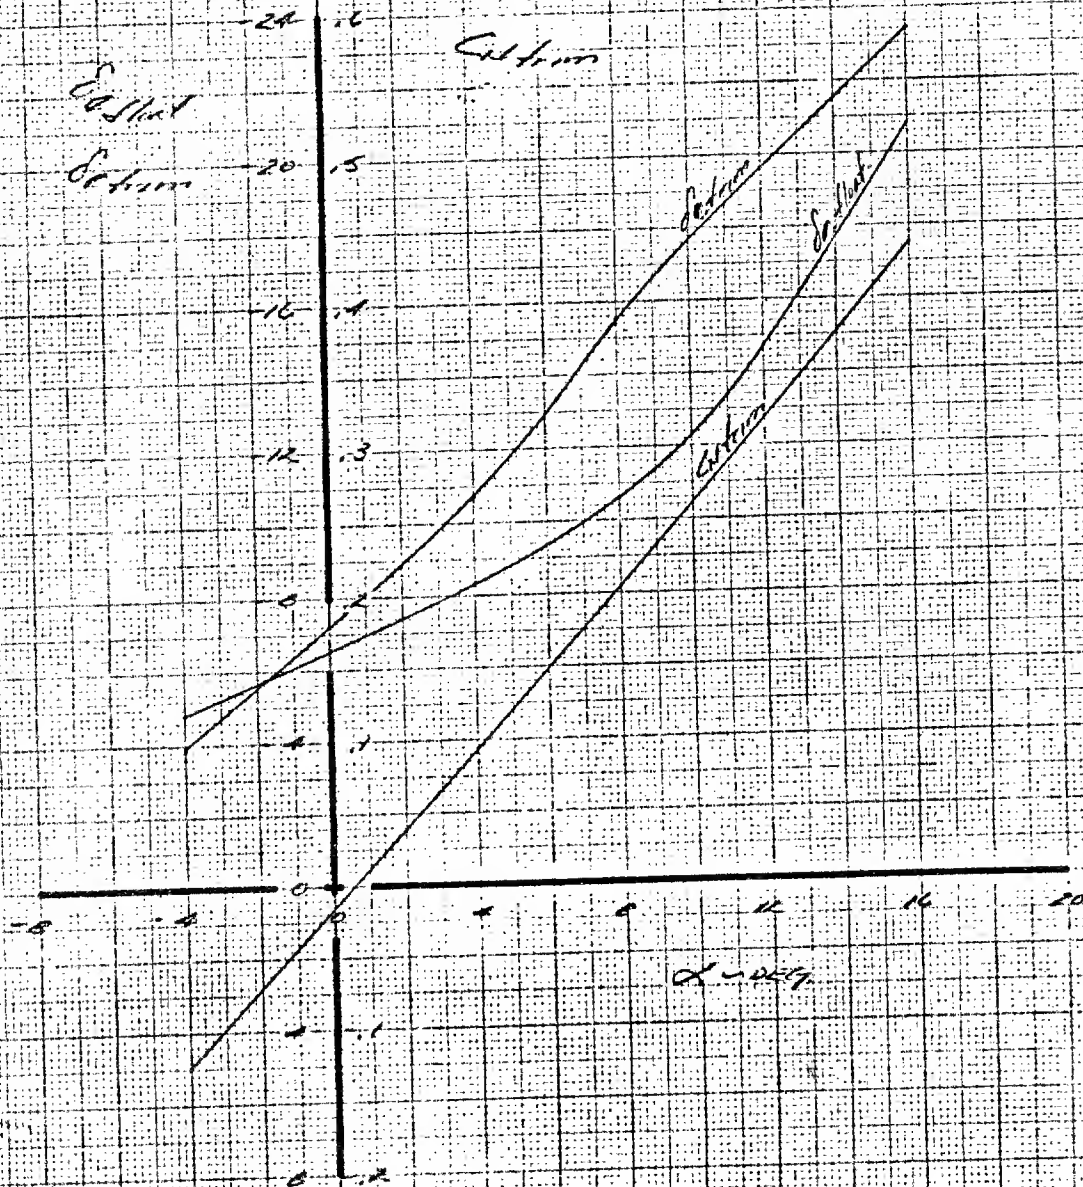


FIG. 6.86

CALC	STATUS	REVISED	DATE
CHECK		12-20-1	
APR			
APR			

ELEVON FLOAT & TRIM COMPARISON
GLIDER ALONE
M = 1.40

THE BOEING COMPANY

844-20500
DL-80065
PAGE
6.96

CONFIDENTIAL

CONFIDENTIAL

DYNA-SUR MODEL 844-20500

$M = 2.0$

C.G. AT .44 m.q.c.

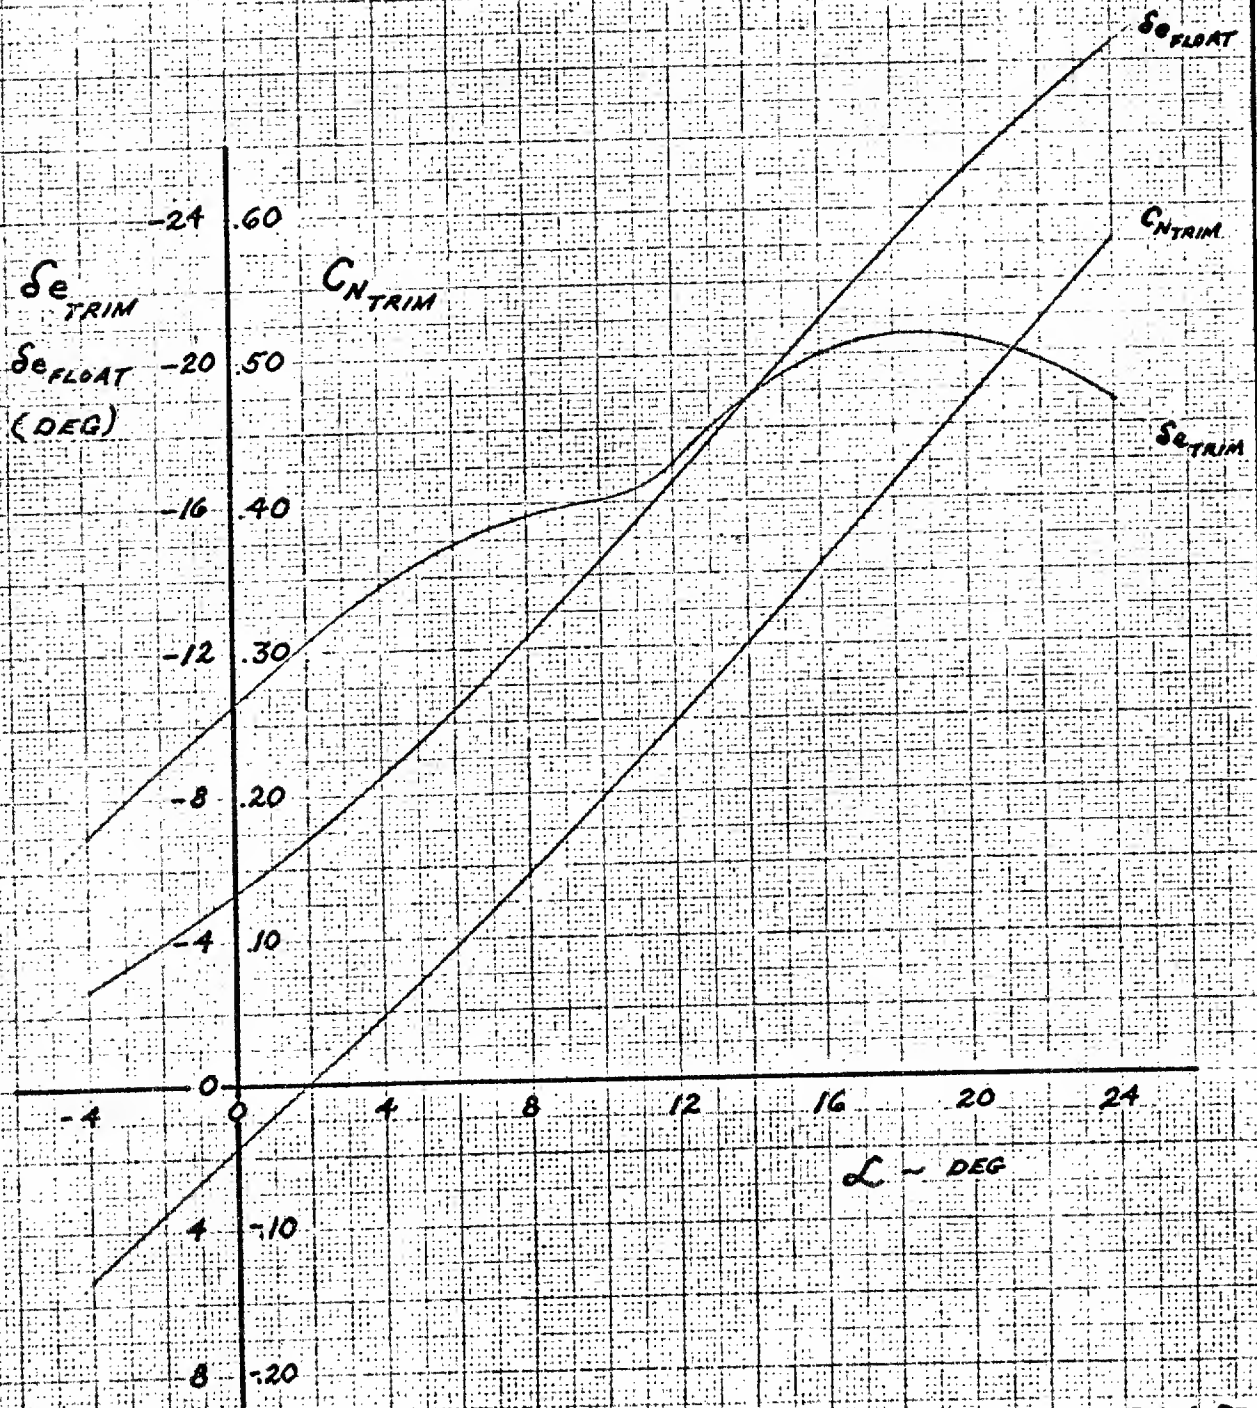


FIG. 6.87

CALC	<i>Wpl AC</i>	11-11-61	REVISED	DATE	ELEVON FLOAT & TRIM COMPARISON GLIDER ALONE $M = 2.00$	844-20500
CHECK			12-20-61			02-80065
APR						
APR					THE BOEING COMPANY	PAGE 6.97

Approved For Release 2003/10/15 : CIA-RDP70B00564R000200010001-1

FORMER 1001 60629

CONFIDENTIAL

CONFIDENTIAL

DATA - 3011K (10000) - 511-20500

$$M = 3.5$$

C.G. AT .44 m. a.c.

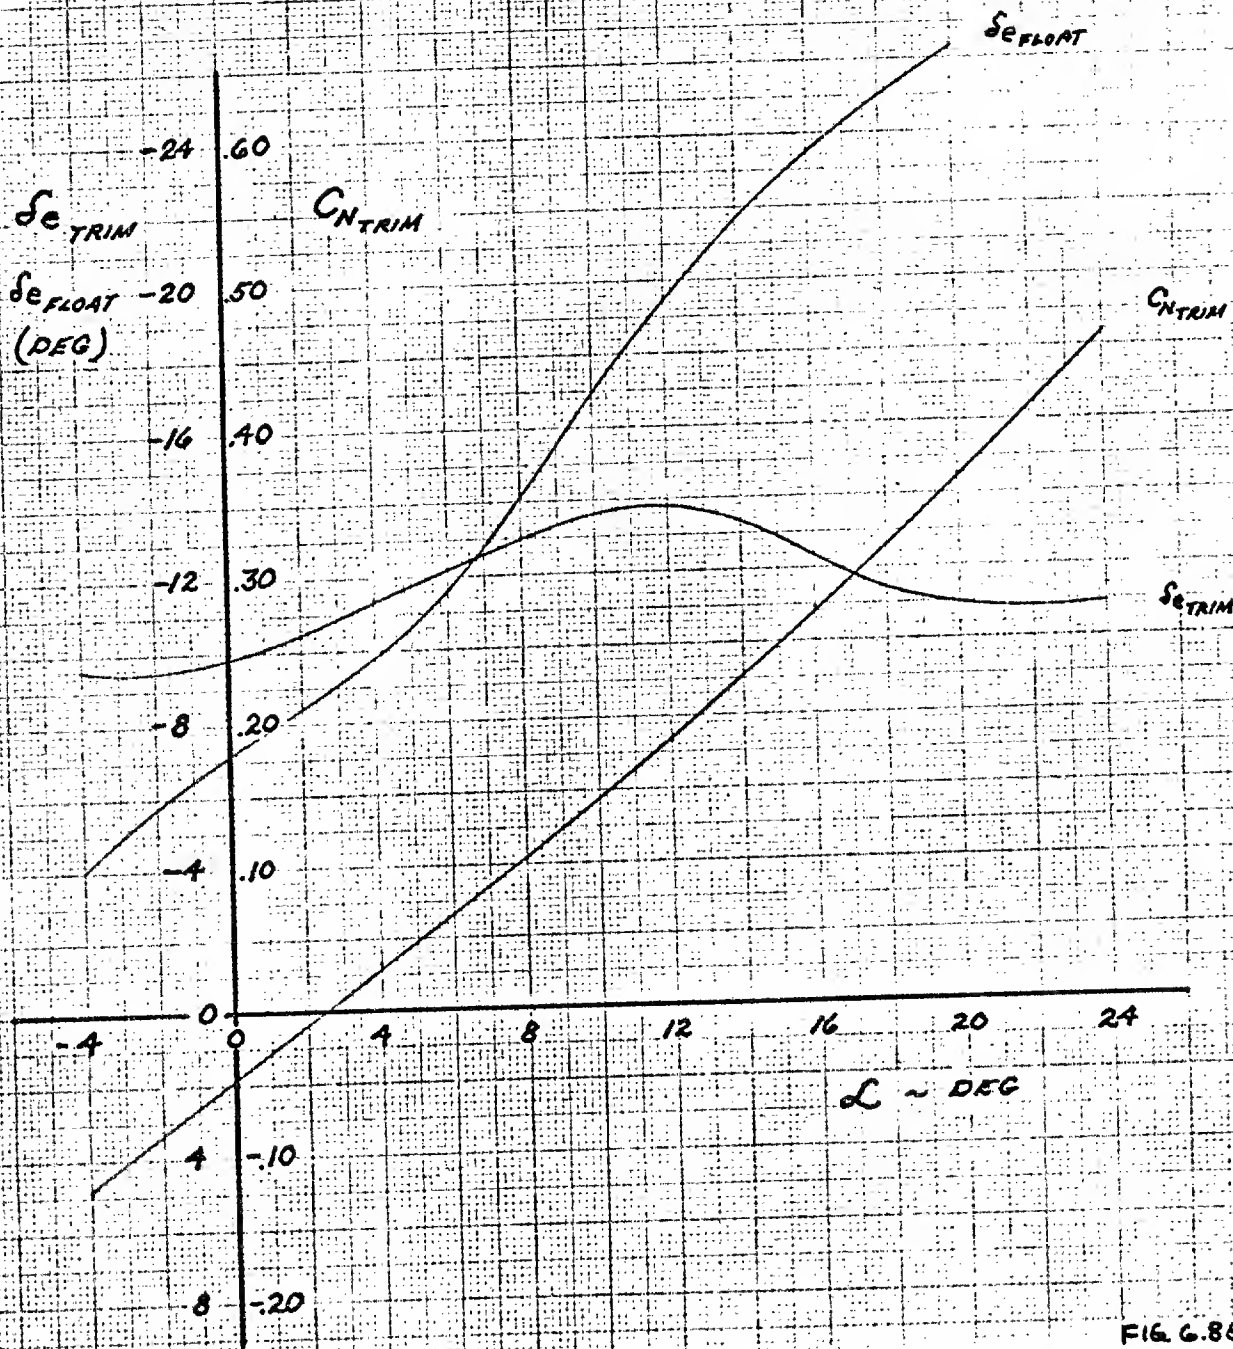


FIG. 6.88

CALC.	22 Sept 61	11-9-61	REVISED	DATE	ELEVON FLOAT & TRIM COMPARISON GLIDER ALONE M = 3.50	844-20500
CHECK			12-22-61			02-80065
APR						PAGE
APR						6.98
					THE BOEING COMPANY	

CONFIDENTIAL

CONFIDENTIAL**6.2 LATERAL-DIRECTIONAL STABILITY AND CONTROL**

Lateral-directional stability and control characteristics for model 844-2050 D glider configuration are presented in Figures 6.89 through 6.97. All data shown are for a rigid glider with the c.g. at .44c and waterline 124. Aeroelastic effects are given in section 8. Figures are shown with the elevons in longitudinal trim position, except for the aileron characteristics where symmetric deflections from the trim position have been considered. Summary Mach number curves of directional aerodynamic center, directional stability, lateral stability and side force derivative are shown in Figures 6.89-6.92. Lateral-directional control characteristics, yawing and rolling moment variation with rudder or aileron deflection, are shown in Figures 6.93 through 6.97. At individual Mach numbers, lateral-directional characteristics have been presented versus sideslip angle to show existing non-linearities. More detail of the incremental effects of rudder or aileron deflections has also been shown at constant Mach numbers. Rudders are deflected about a 6 degree trail position below a Mach number of 2.5 and about a position faired with the vertical at higher Mach numbers. Both rudders are deflected simultaneously between limits of 12 degrees inboard and 35 degrees outboard.

Curves are based on wind tunnel data and analytical estimates. Subsonic and transonic data were obtained in the Boeing Transonic Wind Tunnel, while supersonic data came from tests in the Boeing Supersonic Wind Tunnel. Jet Propulsion Laboratory 21" Hypersonic Wind Tunnel and Arnold Center Tunnel B provided the hypersonic data. Consideration was also given to previous high Mach number data from Boeing Hot Shot Wind Tunnel on a similar glider configuration.

12-20-1

US 4070 7000 REV. 3/61

CONFIDENTIAL**BOEING**

NO. 02-30065

PAGE 6-99

2-5100

CONFIDENTIAL

CONFIDENTIAL


RIGID GLIDER

$\delta_{\text{TRIM}} = 0^\circ$
 $B = 0^\circ$

DYNA SOAR GLIDER
MODEL 844-2050 D

BODY AXES DATA
 $S_w = 345 \text{ ft}^2$
 $b = 245 \text{ in}$

RUBBER
 $\delta_{\text{TRAIL}} = 0^\circ$
 $\delta_{\text{TRAIL}} = \text{TRAIL ANGLE}$

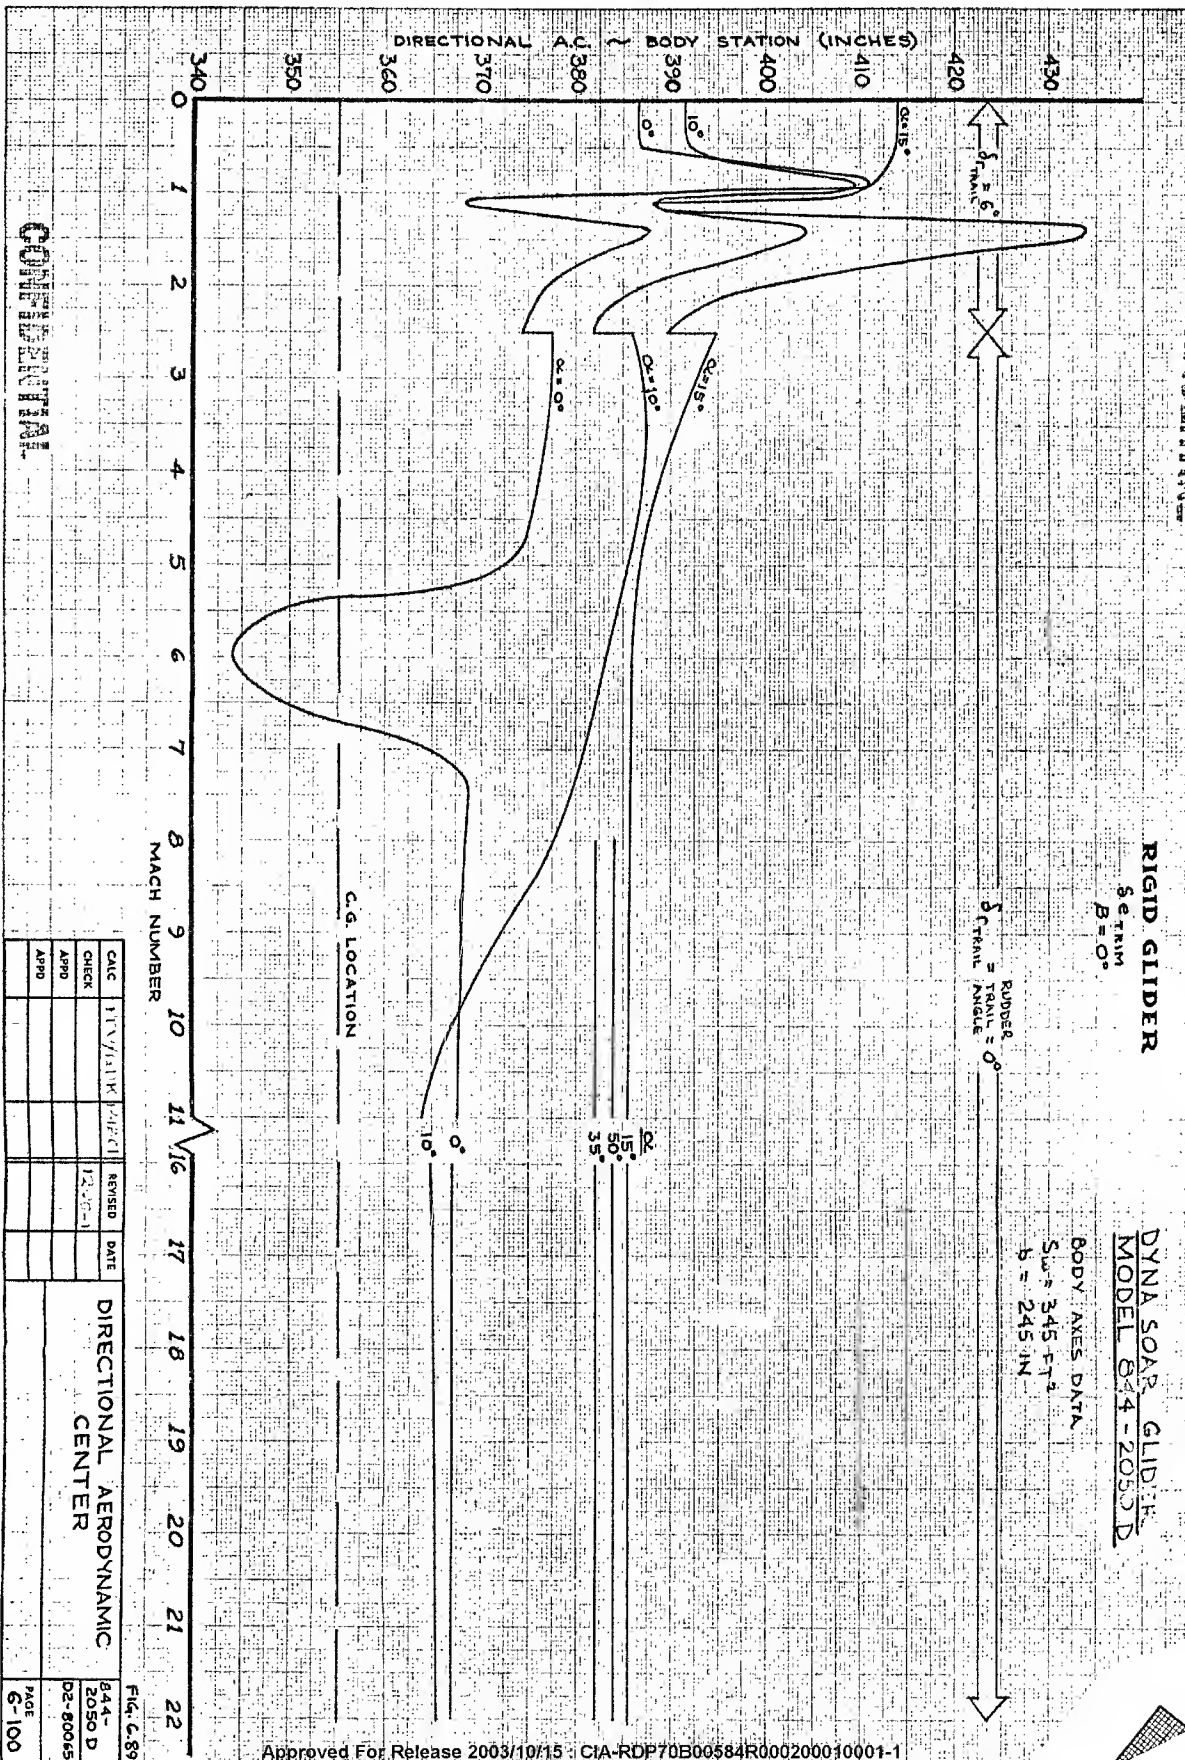


CONFIDENTIAL

CALC	REVISION	DATE	DIRECTIONAL AERODYNAMIC CENTER	PAGE
CHECK	12-1-1			6-100
APPD				
APPD				

CONFIDENTIAL

CONFIDENTIAL

CONFIDENTIAL

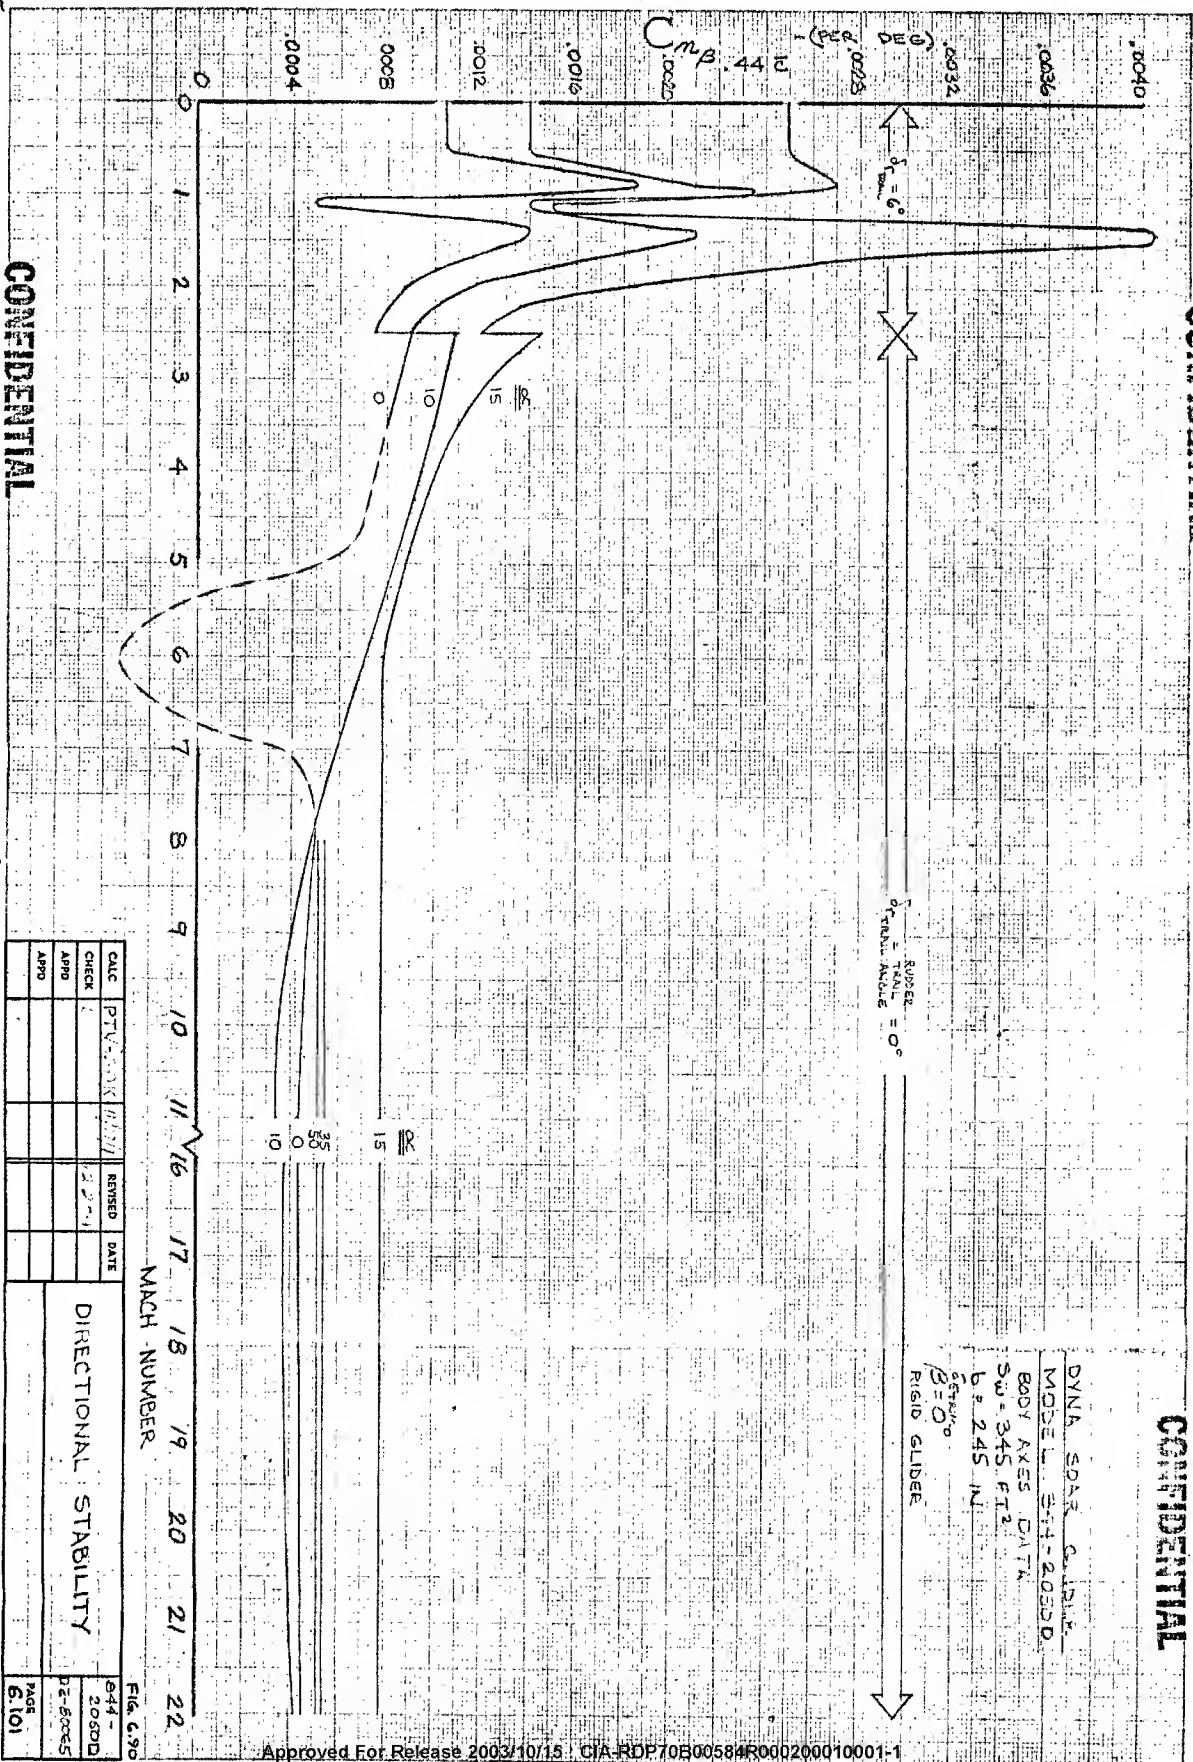

CALC	CHK	REVISED	DATE
PTV-500K (11/77)		2/2/78	
CHECK			
APPRO			
APPRO			

DIRECTIONAL STABILITY

PAGE 6.101

CONFIDENTIAL


CONFIDENTIAL

CONFIDENTIAL

CONFIDENTIAL

DYNA SOAR GLIDER
MODEL 244-2050D

RIGID - GLIDER
BODY AXIS DATA
SW = 345 FT²
b = 24.5 IN
 $\bar{c}_{\text{TRAIL}} = 0$
B = 0

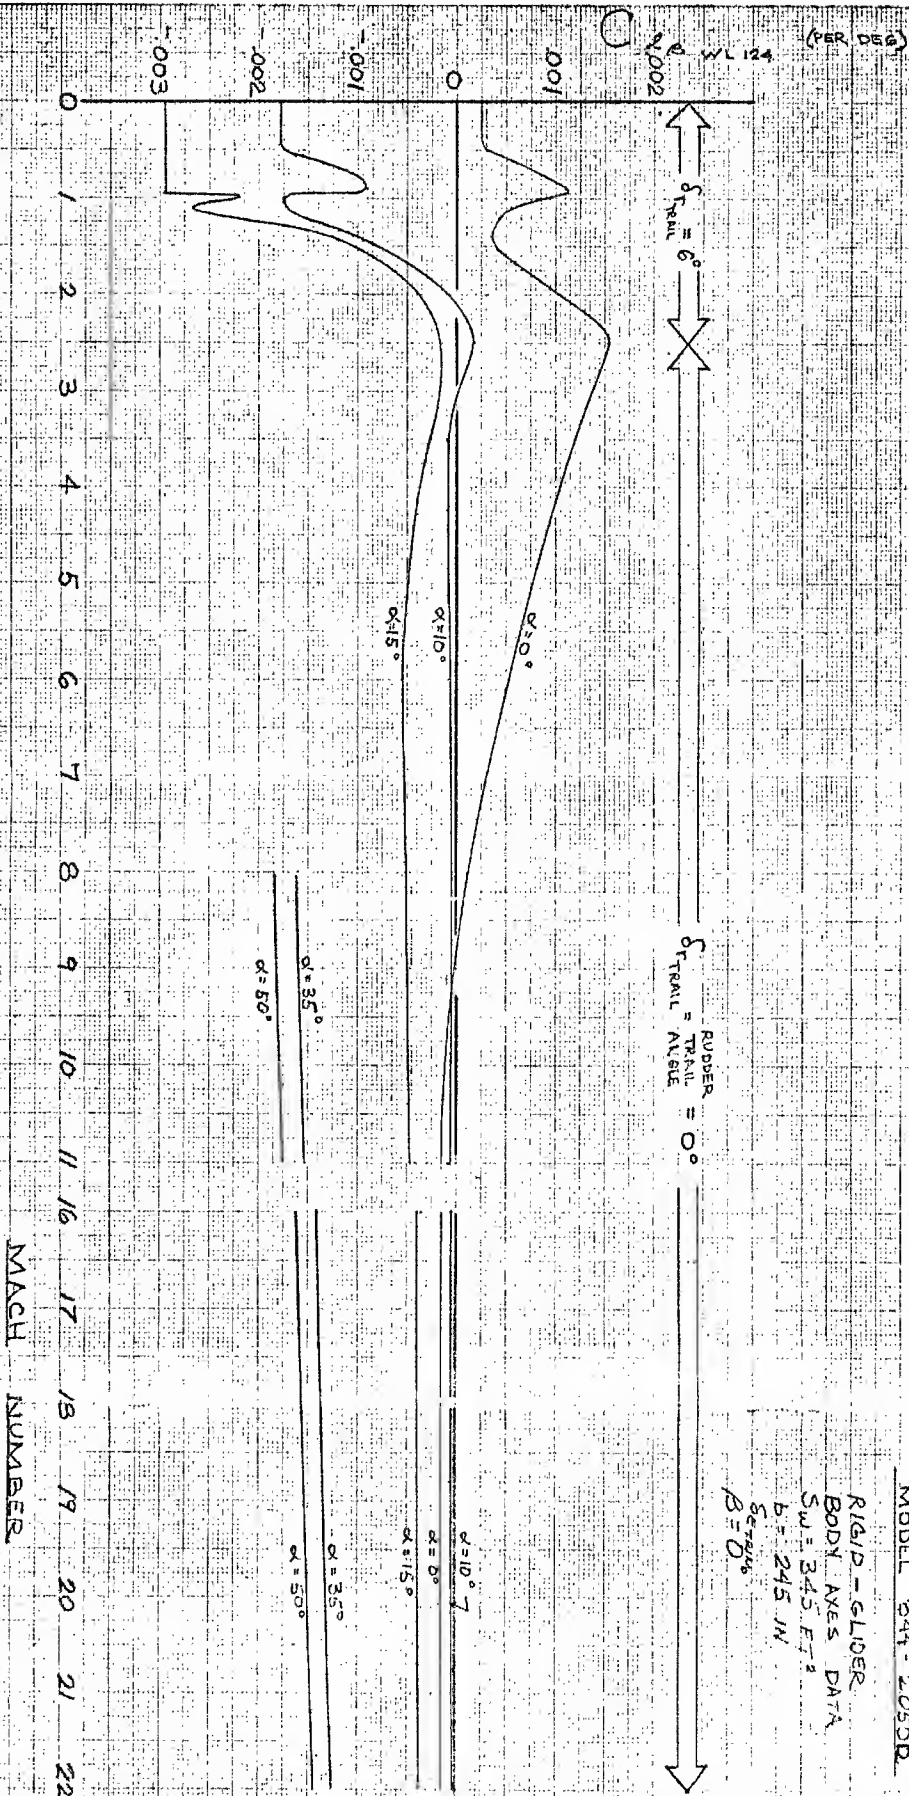

MACH NUMBER

CALC	PTV	11/7/1	RENGED	DATE	LATERAL STABILITY
CHECK			12-20-1		
APPO					
APPO					

FIG. 6.91

B-44 - 2050D
D2-6006
PAGE 6.102

CONFIDENTIAL


CONFIDENTIAL

CONFIDENTIAL

CONFIDENTIAL

DYNA SOAR GLIDER
MODEL B44-2050D

RIGID
 $S_w = 345 \text{ ft}^2$
 $b = 245 \text{ IN}$
RIGID GLIDER
 $\beta = 0^\circ$
SETBACK

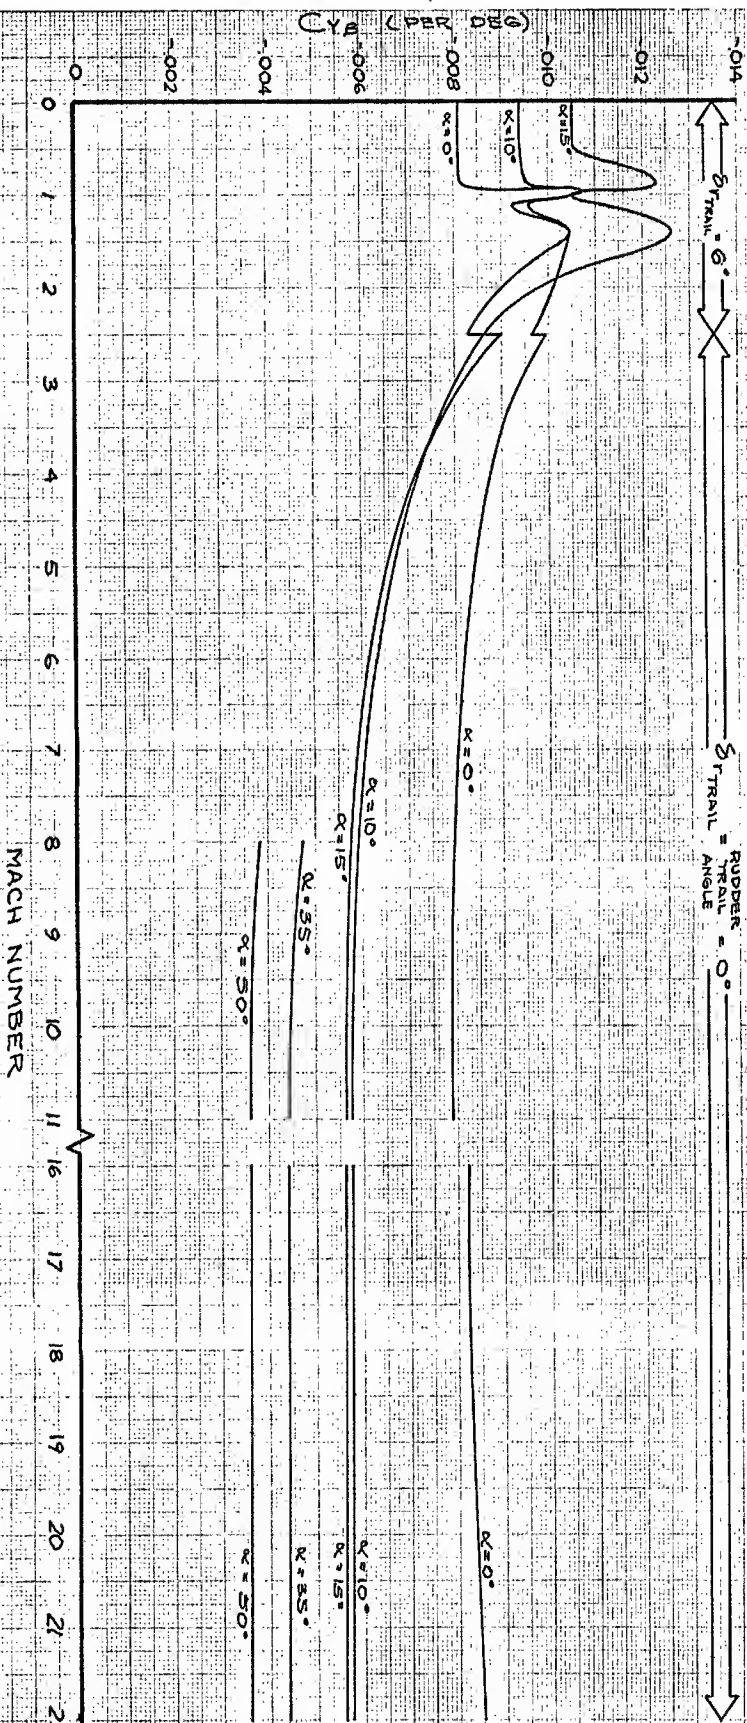

CONFIDENTIAL

CALC	PTV	11/21/11	REVISED	DATE	SIDE FORCE DERIVATIVE	PAGE
CHECK						044-2050D
APRD						02-0005
DRN	RICE	11-21-11				6-103

CONFIDENTIAL

CONFIDENTIAL


DYNA SOAR GLIDER
MODEL B44-2050D

NOTE: $M < 2.5$ RUDDERS DEFLECTED
ABOUT 6° TRAIL POSITION

RIGID GLIDER

$\beta = 0^\circ$

$S_{WREF} = 345 \text{ FT}^2$
 $b_{REF} = 245 \text{ IN}$

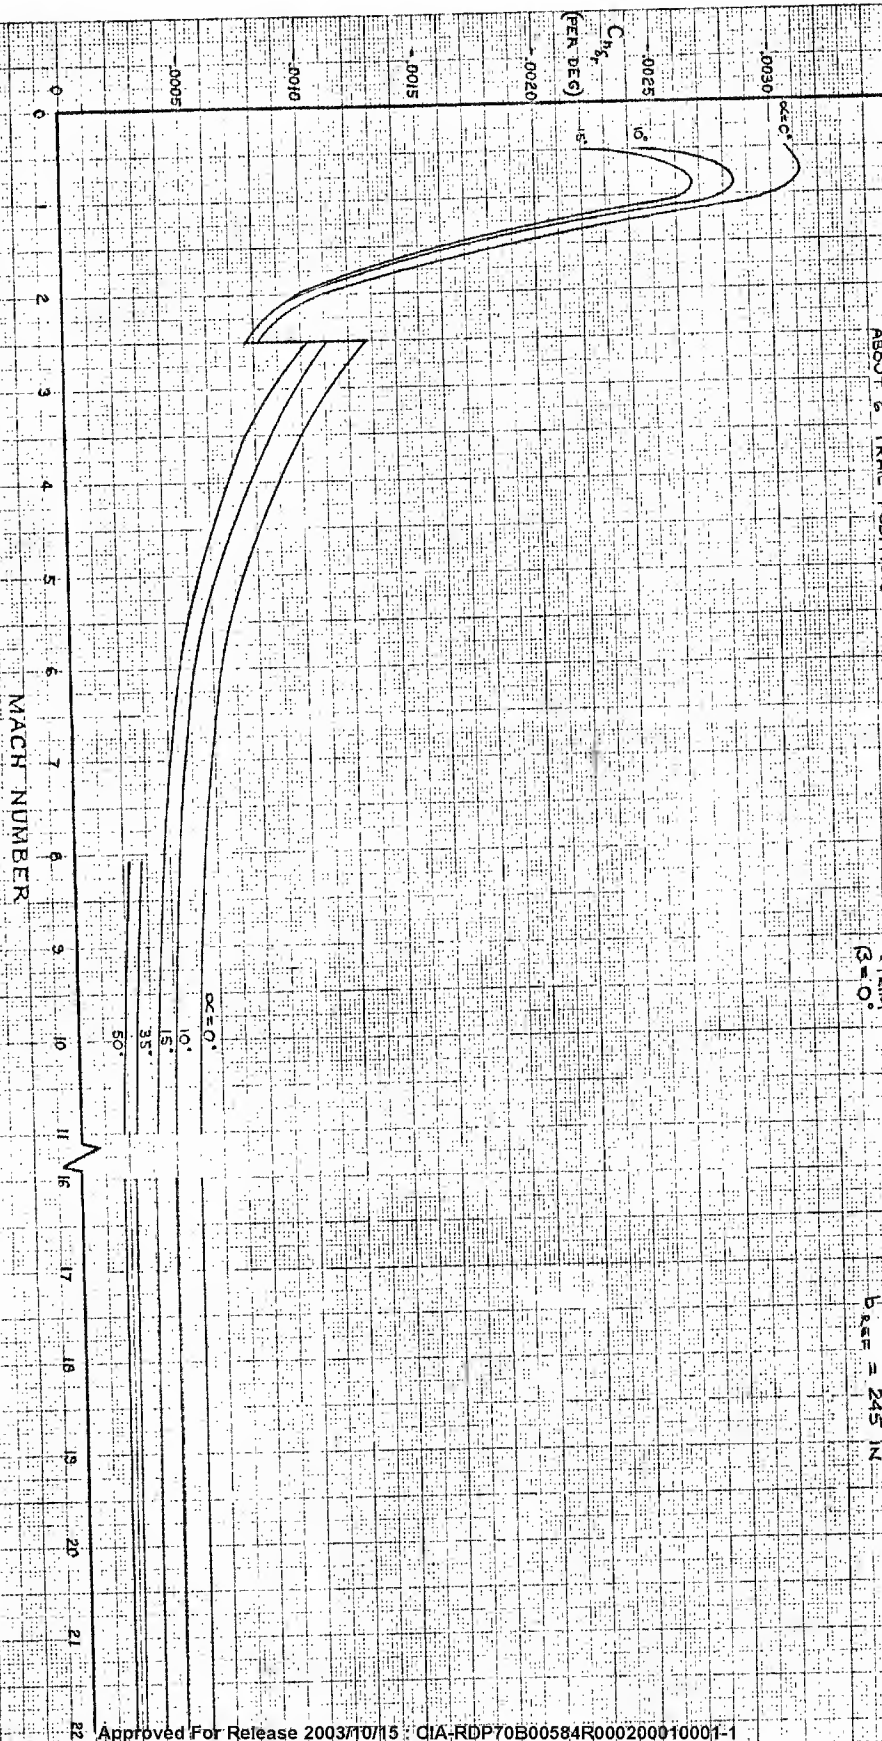

DATE	BY	REVISION	DATE	REVISION
04-11-64	WAC	1	04-11-64	1
02-08-64	WAC	2	02-08-64	2
02-08-64	WAC	3	02-08-64	3
02-08-64	WAC	4	02-08-64	4
02-08-64	WAC	5	02-08-64	5
02-08-64	WAC	6	02-08-64	6
02-08-64	WAC	7	02-08-64	7
02-08-64	WAC	8	02-08-64	8
02-08-64	WAC	9	02-08-64	9
02-08-64	WAC	10	02-08-64	10
02-08-64	WAC	11	02-08-64	11
02-08-64	WAC	12	02-08-64	12
02-08-64	WAC	13	02-08-64	13
02-08-64	WAC	14	02-08-64	14
02-08-64	WAC	15	02-08-64	15
02-08-64	WAC	16	02-08-64	16
02-08-64	WAC	17	02-08-64	17
02-08-64	WAC	18	02-08-64	18
02-08-64	WAC	19	02-08-64	19
02-08-64	WAC	20	02-08-64	20
02-08-64	WAC	21	02-08-64	21
02-08-64	WAC	22	02-08-64	22

100


RIGID GLIDER

$B = 0$

DYNA SOAR GLIDER
MODEL 844-2050D

SWREL = 345 FT2
BEEF = 245 IN

NOTE: M-2.5 RUDDERS DEFLECTED
ABOUT 6° TRAIL POSITION

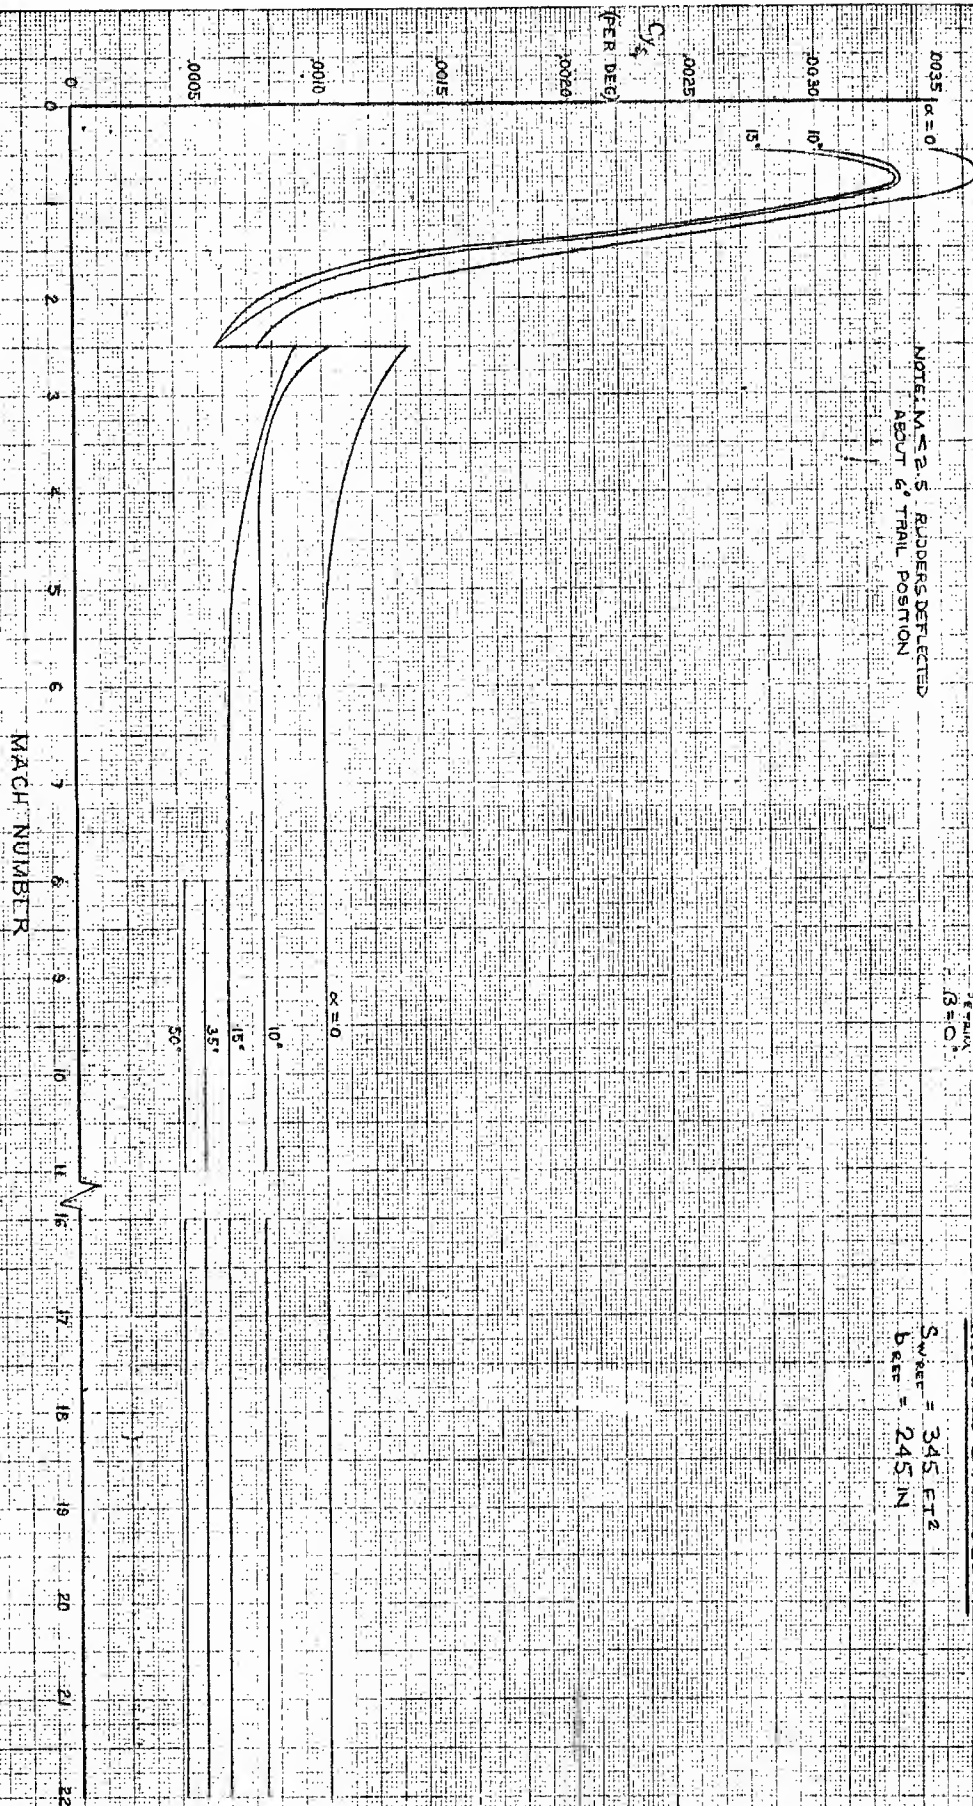


10-1-78

DATE	REVISED	DATE	ROBBER EFFECTIVENESS ~ SIDE FORCE DERIVATIVE	844 - 2000.0
CHECK	12-20-1			02-844-05
APPD				PAGE
APPD				6.106

F16. C.95

CONFIDENTIAL

CONFIDENTIAL

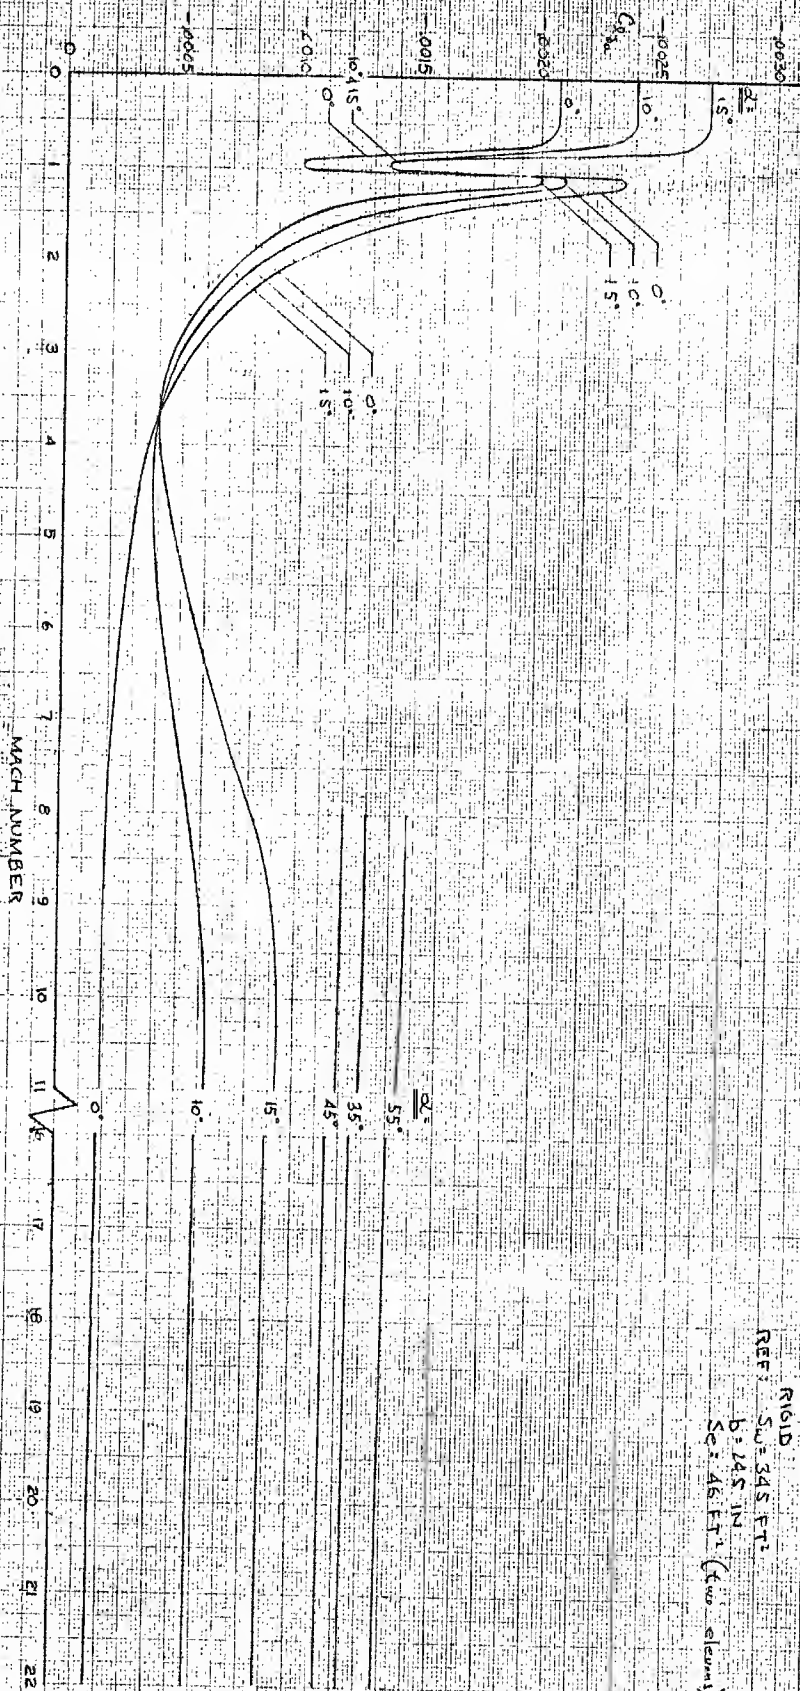

$\beta = 0^\circ$

5% TRIM

DYNALSOAR

MODEL 844-2050 D

BODY AXES

RIGID

REF: $S_w = 345 \text{ FT}^2$

$b = 24.5 \text{ IN}$

$Sc = 46.1 \text{ FT}^2$ (two elements)

CONFIDENTIAL

CALC	CHKD	DATE	REVISED	DATE
CHECK				
APPD				
APPD				

AIRCRAFT EFFECTIVE PRESSURE
ROLLING MOMENT

FIG. C.9C

2050 D

02-80045

PAGE 6/107

CONFIDENTIAL

CONFIDENTIAL

CONFIDENTIAL

DYNA 50AR

MODEL 184A-2050D


BODY AXES

REF: SW 24.8 FT

SC = 46 FT (4.5 elev)

SE & TRIM

13.0°

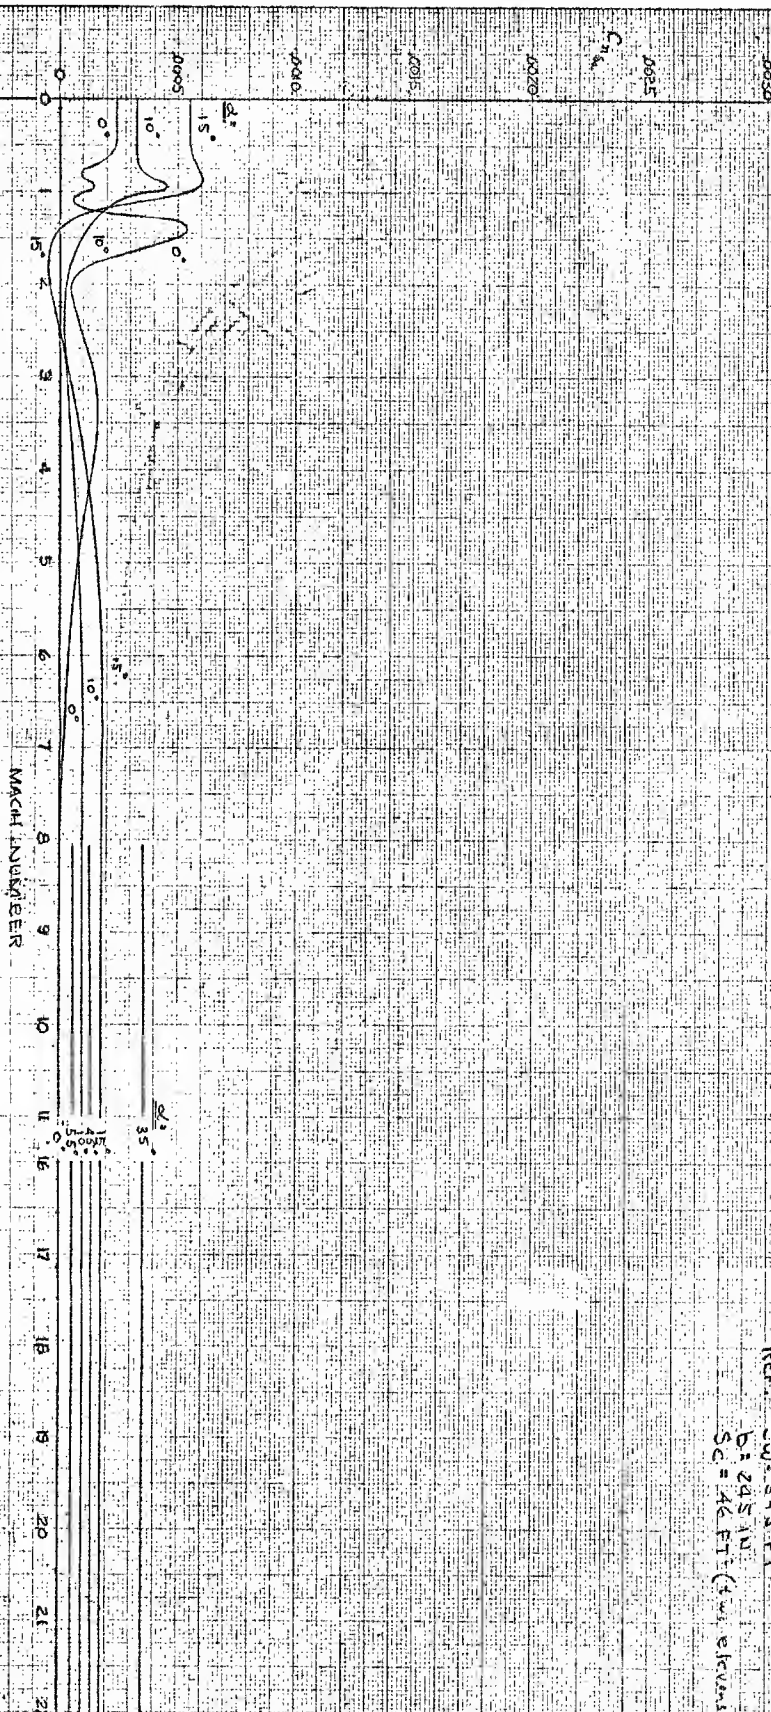

MACH NUMBER

CONFIDENTIAL

CONFIDENTIAL

CALC	Eq. 12.15	12/2	REMOVED	DATE	ALLERSON EFFECTIVENESS	8/14/73
CHECK					WING MOMENT	8/14/73
APPD						02-80065
APPD						PLC 6.108

CONFIDENTIAL

6.2.1 LANDING SPEED - GEAR AND GEAR DOORS EXTENDED

The stability characteristics as shown on Figure 6.98 are based on wind tunnel data for gear only from test BTWT 634, on glider data from test BTWT 682 and BTWT 685 and on calculation for gear doors extended for the 844-2050 D rigid glider. Test data for the complete built up configuration of 844-2050 D glider with gear and gear doors, extended will be obtained in the near future.

Aileron characteristics and rudder effectiveness will be covered under Lateral Directional Subsonic and Transonic Speed 6.2.2.

CONFIDENTIAL

BOEING




NO. D2-80065

CONFIDENTIAL

DYNA-SOAR MODEL - 844-2410D

$M = 0.26$

LANDING SPEED - GEAR & GEAR DOORS
EXTENDED

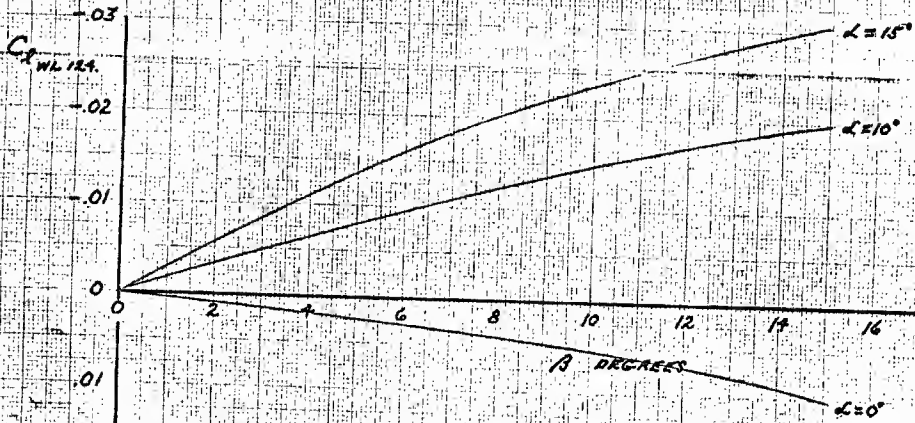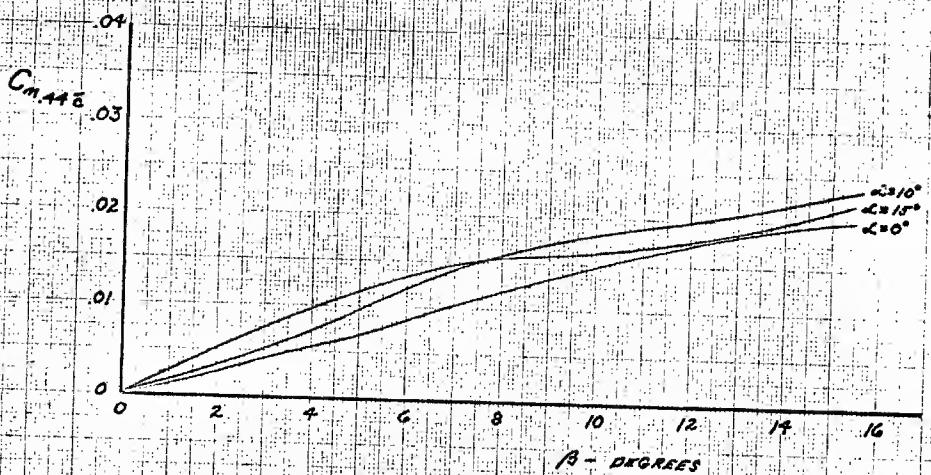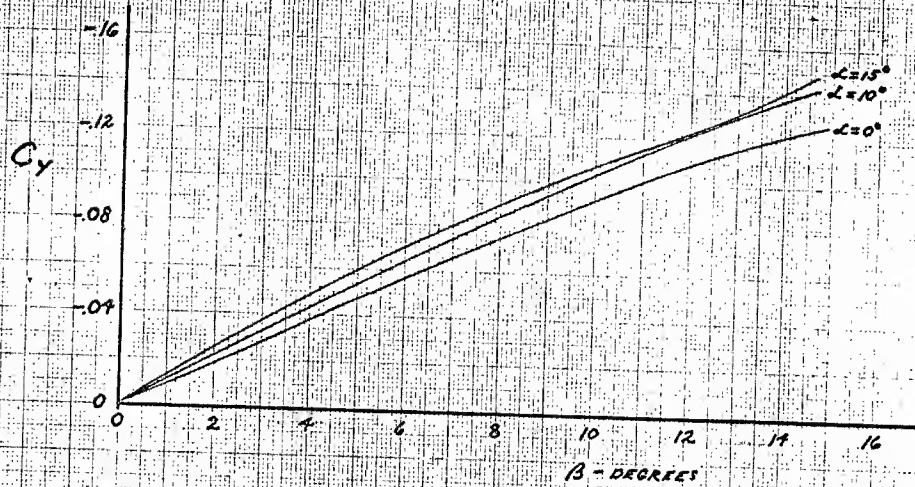

CONFIDENTIAL

CONFIDENTIAL

CALC	REVISED	DATE	FIG. 6.98
CHECK	12-2-64		
APPRO	12-2-64		
APPRO			
LATERAL-DIRECTIONAL STABILITY			
LANDING GEAR & GEAR DOORS			
EXTENDED			
64-20000			
02-80005			
PAGE			
6-110			

CONFIDENTIAL

6.2.2 SUBSONIC-TRANSONIC SPEED

Presented in this section are lateral directional stability, rudder effectiveness and aileron characteristics for the 844-2050 Revision D glider through the subsonic-transonic speed range.

Glider stability is shown in plots of C_n , C_y and C_l vs β in figures 6.104 through 6.108 at Mach numbers of .50, .80, .90, .95, 1.0 and 1.10 for an elevon deflection of -10° . These data are based on Boeing transonic wind tunnel test 685 and modified for the Revision D configuration.

Figures 6.104 through 6.108 present rudder effectiveness for an elevon deflection of -10° at Mach numbers of .50, .80, .90, .95 and 1.10. The data are shown as C_n , C_y and C_l vs δ_r and are based on Boeing transonic tests 672 and 682. Dual rudder characteristics are shown in figures 6.104 through 6.108 and are representative of normal in-flight rudder operation. Figures 6.109 through 6.113 present the single rudder characteristics upon which the dual rudder data is based. The single rudder data may be used to determine rudder effectiveness at any initial rudder angle.

Aileron characteristics, C_n , C_y and C_l vs δ_a are shown in figures 6.114 through 6.117 for Mach numbers of .50, .80, .95 and 1.10. These data represent elevon deflections of -10° to -15° and are based on Boeing transonic test 672.

12-20-1

U3 4070 7000 REV. 5/61

CONFIDENTIAL

BOEING

NO. 92-80065

186

CONFIDENTIAL




CONFIDENTIAL

$M = 0.50$

DYNA SOAR
MODEL 844-2050D

BODY AXES
RIGID
 $S_{W_{REF}} = 345 \text{ FT}^2$
 $b_{REF} = 245 \text{ IN}$
 $\delta r_{1/2} = -6/16$

$\delta \epsilon = -10^\circ$

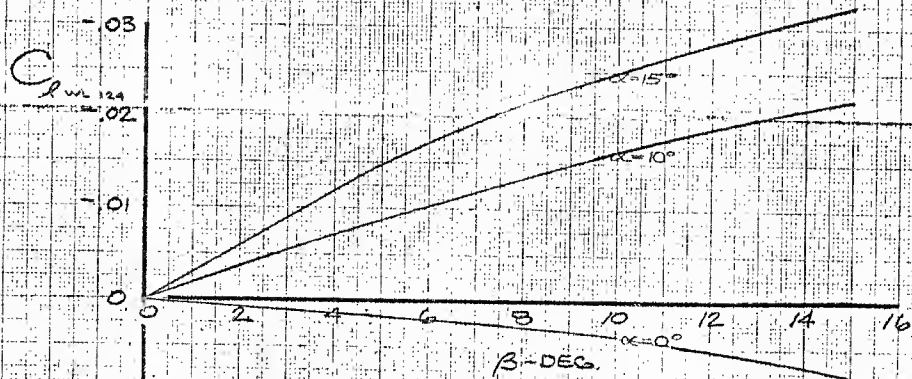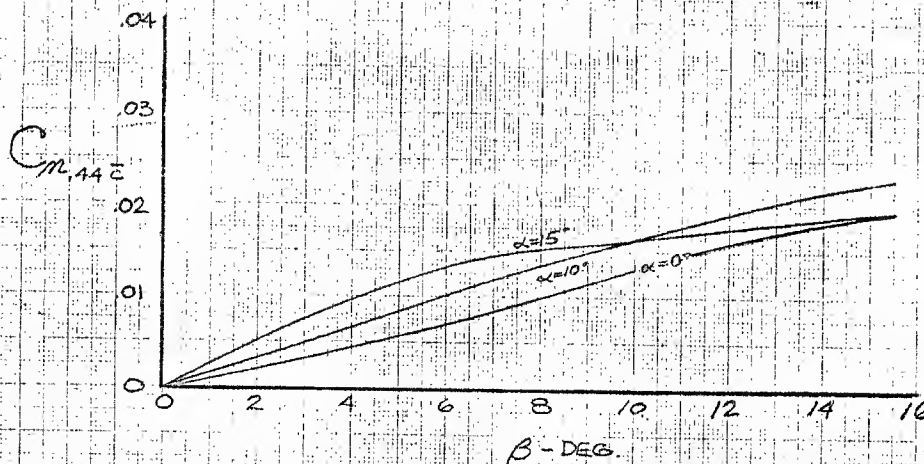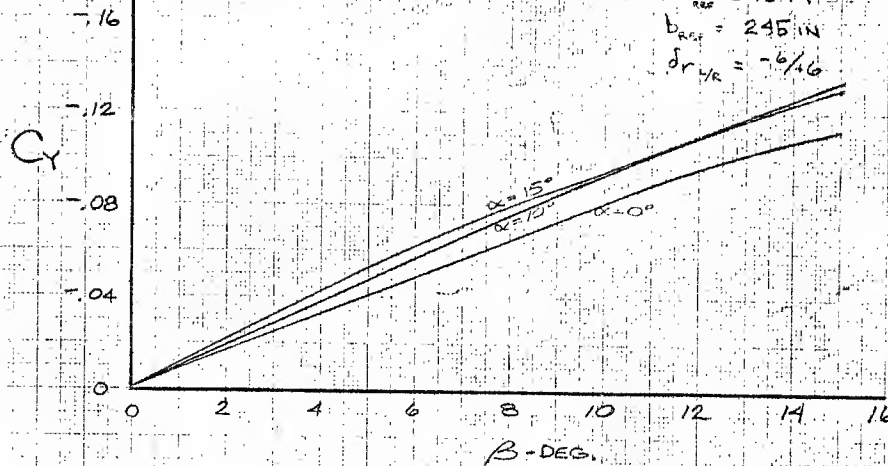

CONFIDENTIAL

CALC	PTV	11/3/11	REVISED	DATE
CHECK	86			
APPRO				

LATERAL-DIRECTIONAL STABILITY
 $M = 0.50$

844-2050D
DZ-80065
C-112

CONFIDENTIAL




CONFIDENTIAL

$M = 0.90$

DYNA SOAR
MODEL 844-2050 D

BODY AXES
RIGID
 $S_{WREF} = 345 \text{ FT}^2$
 $B_{REF} = 245 \text{ IN}$
 $\delta_{CYR} = -9/16$

$\delta_e = -10^\circ$

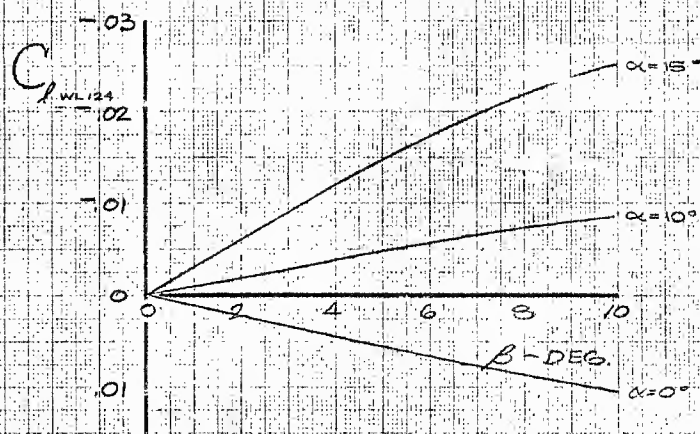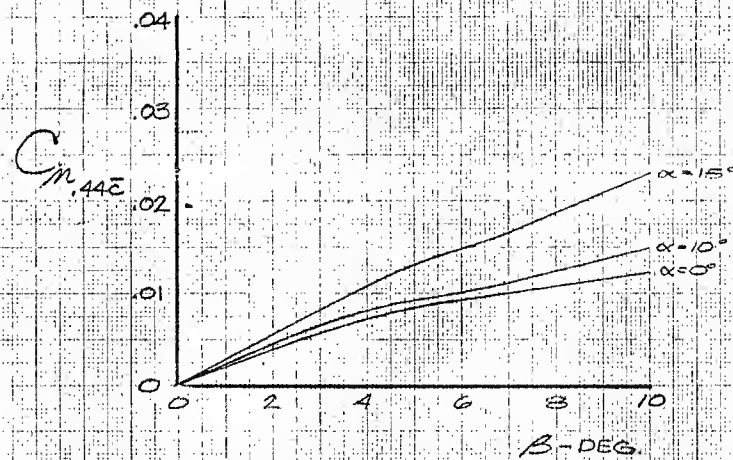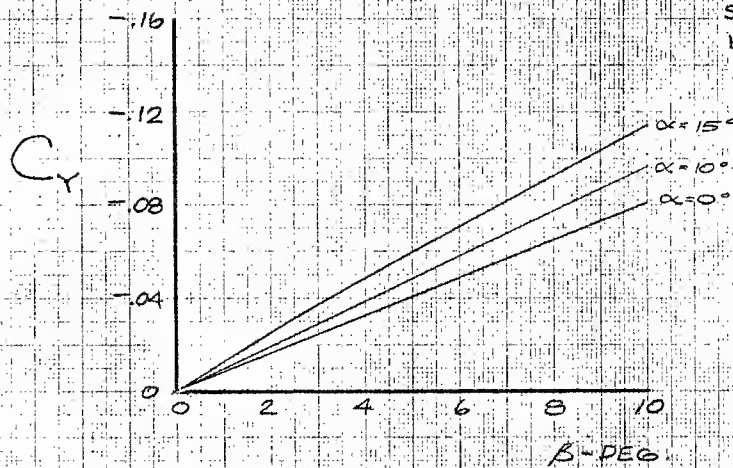

CONFIDENTIAL

CONFIDENTIAL

CALC	PTV	11/13/11	REMOVED	DATE
CHECK				
APP				
APP				

LATERAL-DIRECTIONAL STABILITY
 $M = 0.90$

FILE C.110

844-2050 D
PZ-80065
PAGE 6 113